



Smart Building Technology
and Hybrid Work Solutions

Cisco Talent and Collaboration Centers




Medium Collaboration Room
Design Guide for Single and Dual Displays

Option 1: Cisco Room Bar Pro with Dual 65" Displays Shown



Design Guide

Table of Contents

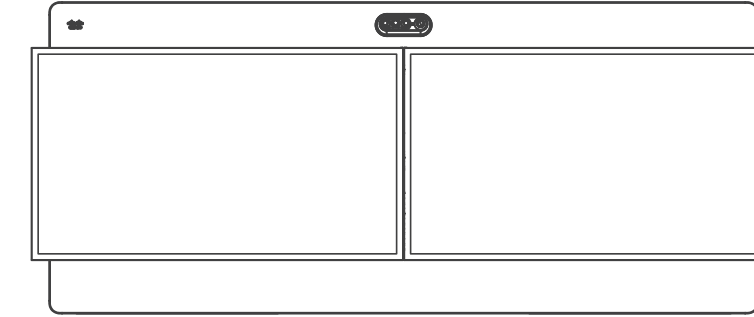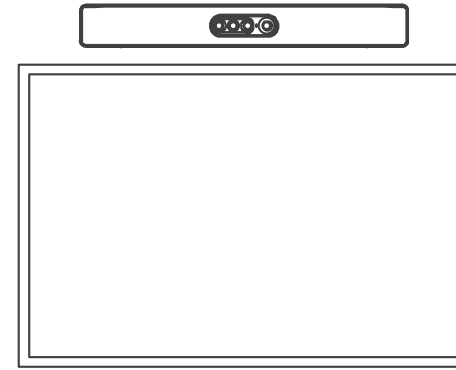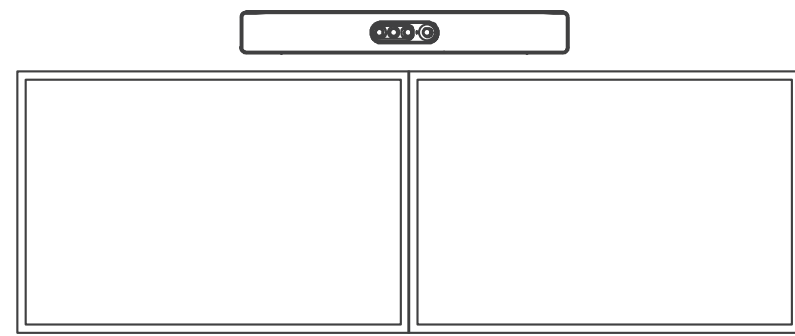

Option 1: Cisco Room Bar Pro Dual Displays (preferred)

Option 2: Cisco Room Bar Pro Single Display (for narrow rooms)

Option 3: Cisco Room Kit EQX Dual Displays (preferred)

<ul style="list-style-type: none"> ▶ Introduction 3 ▶ Visualization of Key Cisco Elements 4 ▶ Certified Third Party Displays 5 	<ul style="list-style-type: none"> ▶ Option 1 6 ▶ Room Layout 7 ▶ Composite Plan 8 ▶ Video Device Mounting Options 9 ▶ Room Elevations Wall Mount Option 10 ▶ Room Elevations A/V Credenza Option 11 ▶ Reflective Ceiling Plan & Acoustical Treatment 12 ▶ Power & Data 13 ▶ Exploded IT Diagram 14 ▶ Connectivity View 15 ▶ IT/OT Bill of Material 16 	<ul style="list-style-type: none"> ▶ Option 2 17 ▶ Room Layout 18 ▶ Composite Plan 19 ▶ Video Device Mounting Options 20 ▶ Room Elevations Credenza Option 21 ▶ Reflective Ceiling Plan & Acoustical Treatment 22 ▶ Power & Data 23 ▶ Exploded IT Diagram 24 ▶ Connectivity View 25 ▶ IT/OT Bill of Material 26 	<ul style="list-style-type: none"> ▶ Option 3 27 ▶ Room Layout 28 ▶ Composite Plan 29 ▶ Video Device Mounting Options 30 ▶ Room Elevations 31 ▶ Reflective Ceiling Plan & Acoustical Treatment 35 ▶ Power & Data 36 ▶ Exploded IT Diagram 37 ▶ Connectivity View 38 ▶ IT/OT Bill of Material 39 	<ul style="list-style-type: none"> ▶ IT/OT Reference Architectures 40 ▶ Commissioning–User Acceptance Testing Criteria 41 ▶ Design Files & Resources 42
---	---	---	---	--



Introduction

Overview and Intent

This document provides guidance on how to effectively design a Medium Collaboration Room. This design brings space layout, technology, and furnishings together to create an optimal experience for those in person and joining remotely.

Each project is unique; thus, it is important to involve internal facilities and IT teams, an architect and/or space designer, furniture providers, and a Cisco-certified integrator as early as possible. The goal is to thoroughly understand the needs of the end users and address any local concerns, including physical layout, wall, floor, and ceiling composition, electrical/mechanical integration, network and cabling considerations, and external environmental issues (lighting/noise/temperature) before the design is finalized.

Room Descriptions

There are three separate design options for this space, each with slightly different room dimensions and technology configurations. Dual screens, leveraging either the **Cisco Room Bar Pro (Option 1)** or **Cisco Room Kit EQX (Option 3)**, are always preferred as dual screens allow ample space for both content and remote attendees to be seen. In narrower spaces, a **Cisco Room Bar Pro with a single larger display (Option 2)** can be used.

Cisco's Cross View capability, which uses two additional Cisco cameras mounted on the side wall to show the best view of people in the room from different angles, is available with Option 3, Dual Screen EQX (or by swapping the Cisco Room Bar Pro in Option 1, Dual Screen Room Bar Pro, with a Cisco Room Kit EQ). Regardless of the configuration chosen, tapering the table is highly recommended, providing great sight lines for both in-person and remote participants.



Note: Links to key Cisco documentation, including product data sheets, room preparation guides and installation materials can be found at the last page of this Design Guide.

Supported Collaboration Activities

- Information Sharing
- Brainstorming
- Team Building
- Decision Making

Visualization of Key Cisco Elements

Cisco Room Navigator
for Wall



Cisco Room Navigator
for Table



Option 1 (preferred)

Cisco Room Bar Pro



Dual 65" displays

LG / Panasonic / Samsung / Sony

Option 2 (for narrow rooms)

Cisco Room Bar Pro



Single 75" display

LG / Panasonic / Samsung / Sony

Option 3 (preferred)

Cisco Room Kit EQX



Dual 65" displays

LG / Panasonic / Samsung / Sony

Microphone Options



Cisco Table Microphone Pro (x2)

- or -



Cisco Ceiling Microphone Pro (x1)

Certified Third Party Displays



Webex certified displays have been tested for compatibility and robustness of their video interfaces, optical characteristics, and basic security practices.

When connected to a Cisco collaboration device they will automatically reconfigure to the optimal configuration already tested and verified.

This list of verified devices was update on November 4, 2024. For up to date information on certified and compatible Cisco collaboration device partner offers, click on the link below.

Vendor	Product or Series	Firmware version
Samsung	QMB	1040.7
Samsung	QBB	1040.7
Samsung	QMC	1040.4
Panasonic	EQ2	2.40
LG	UL3J	03.08.41
LG	UH5J	03.24.01
LG	UR640S	03.17.00
LG	UM5K	3.70.30
Sony	BZ30J, BU30J, BZ35J, BU35J, BZ40H, BU40H, BZ40J, BU40J	6.5929
Sharp/NEC	M751, M861, M981	1.200
Sharp/NEC	MA431, MA491, MA551, P435, P495, P555	3.203
Sharp	PN-LA652, PN-LA752, PN-LA862	1.112

Option 1: Cisco Room Bar Pro with Dual Displays

Preferred Configuration



Room Layout




Room dimensions shown are the minimal size, based on the technology and furniture options shown.


With the 112 degree field of view (FoV) of the Cisco Room Bar Pro, the table setback from display can be reduced to as little as 3'-6" (1067mm), but can be increased to as much as 5'-0" (1524mm) if additional circulation is required.

To future proof this room for Cinematic Meetings Cross view, make the width of this room minimally 16'-0" (4877mm).

Wall Mount Option

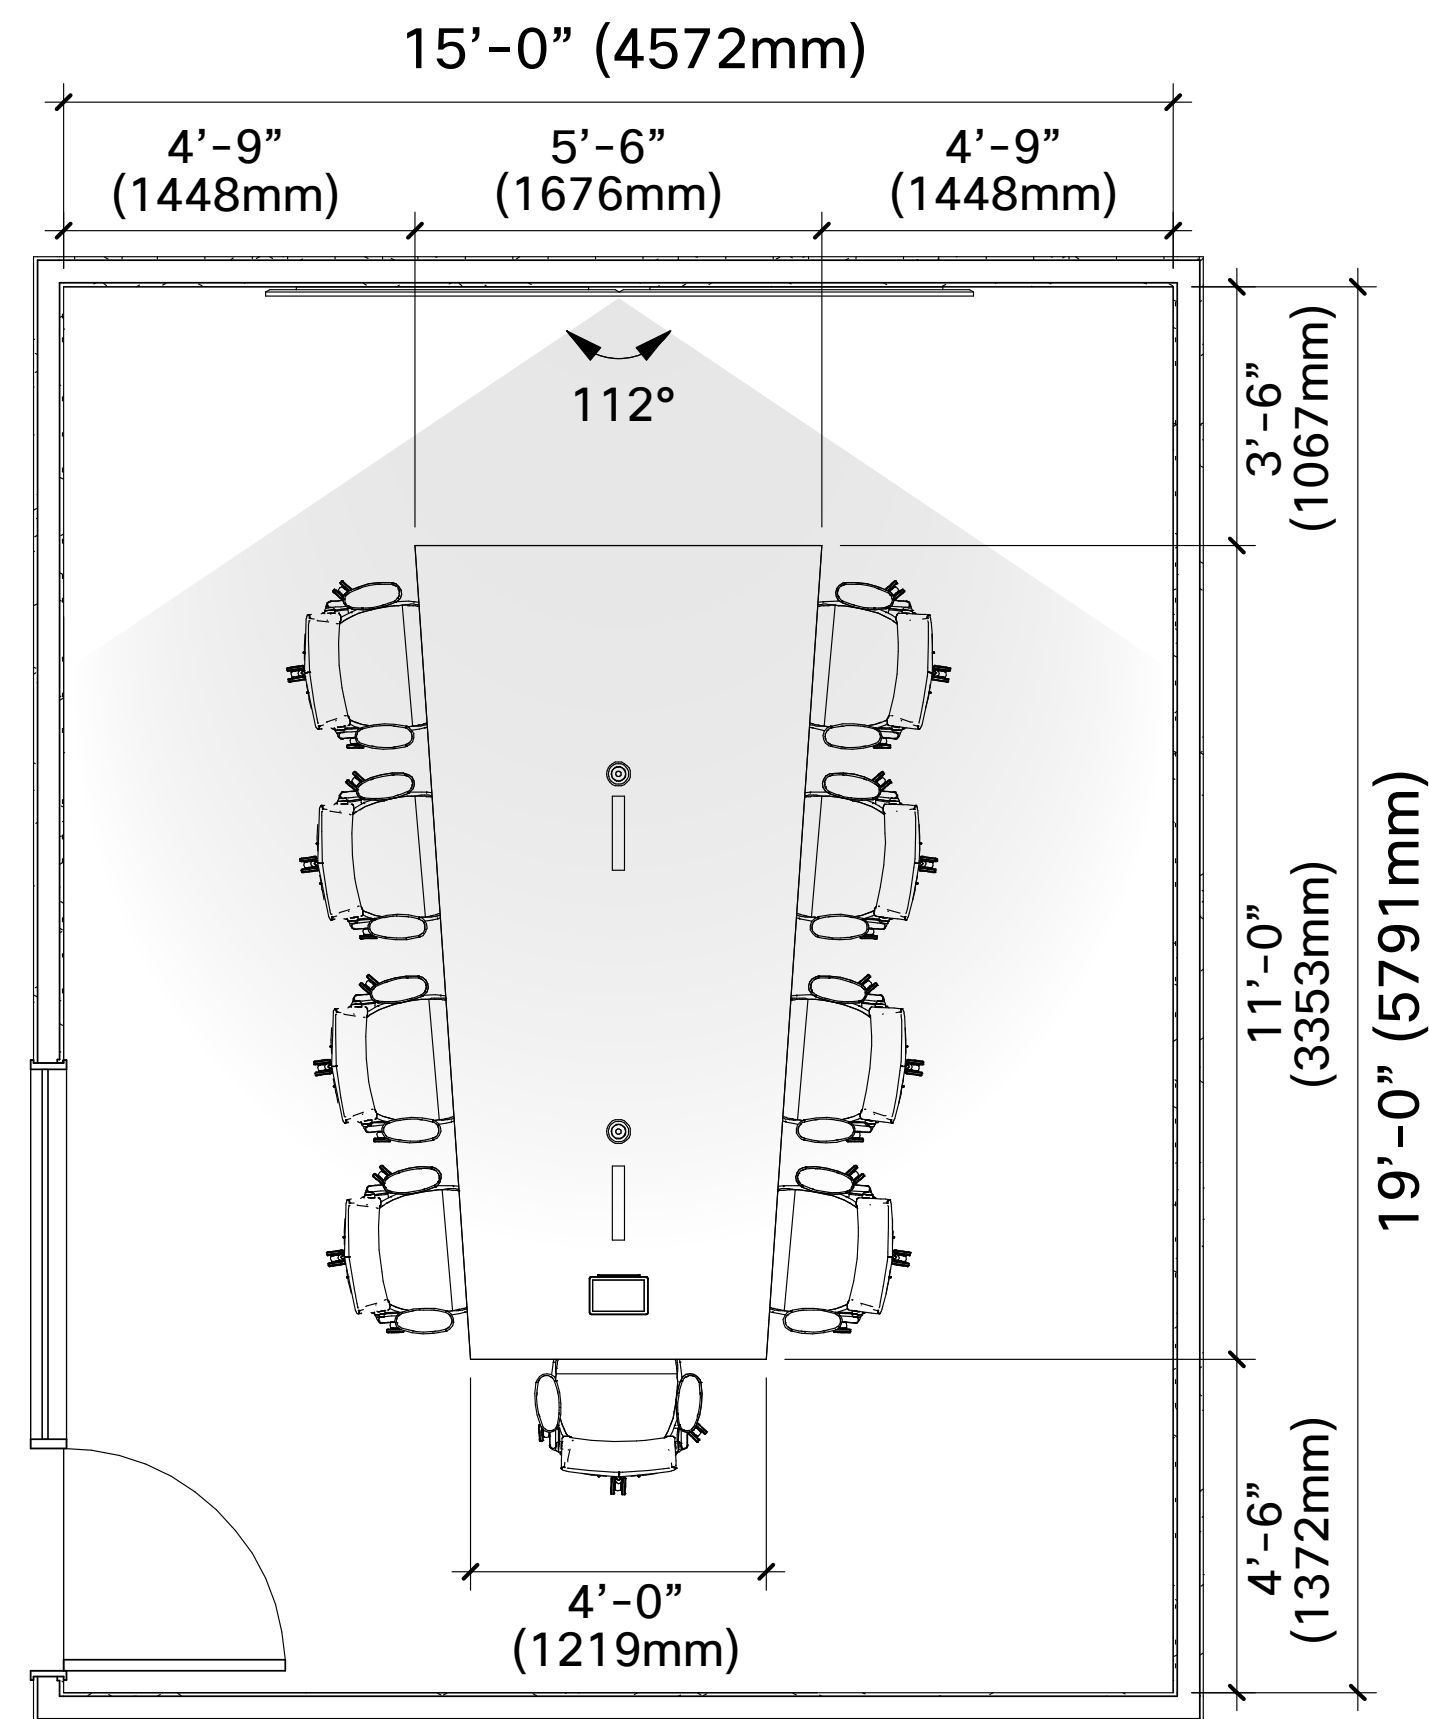

Credenza Option


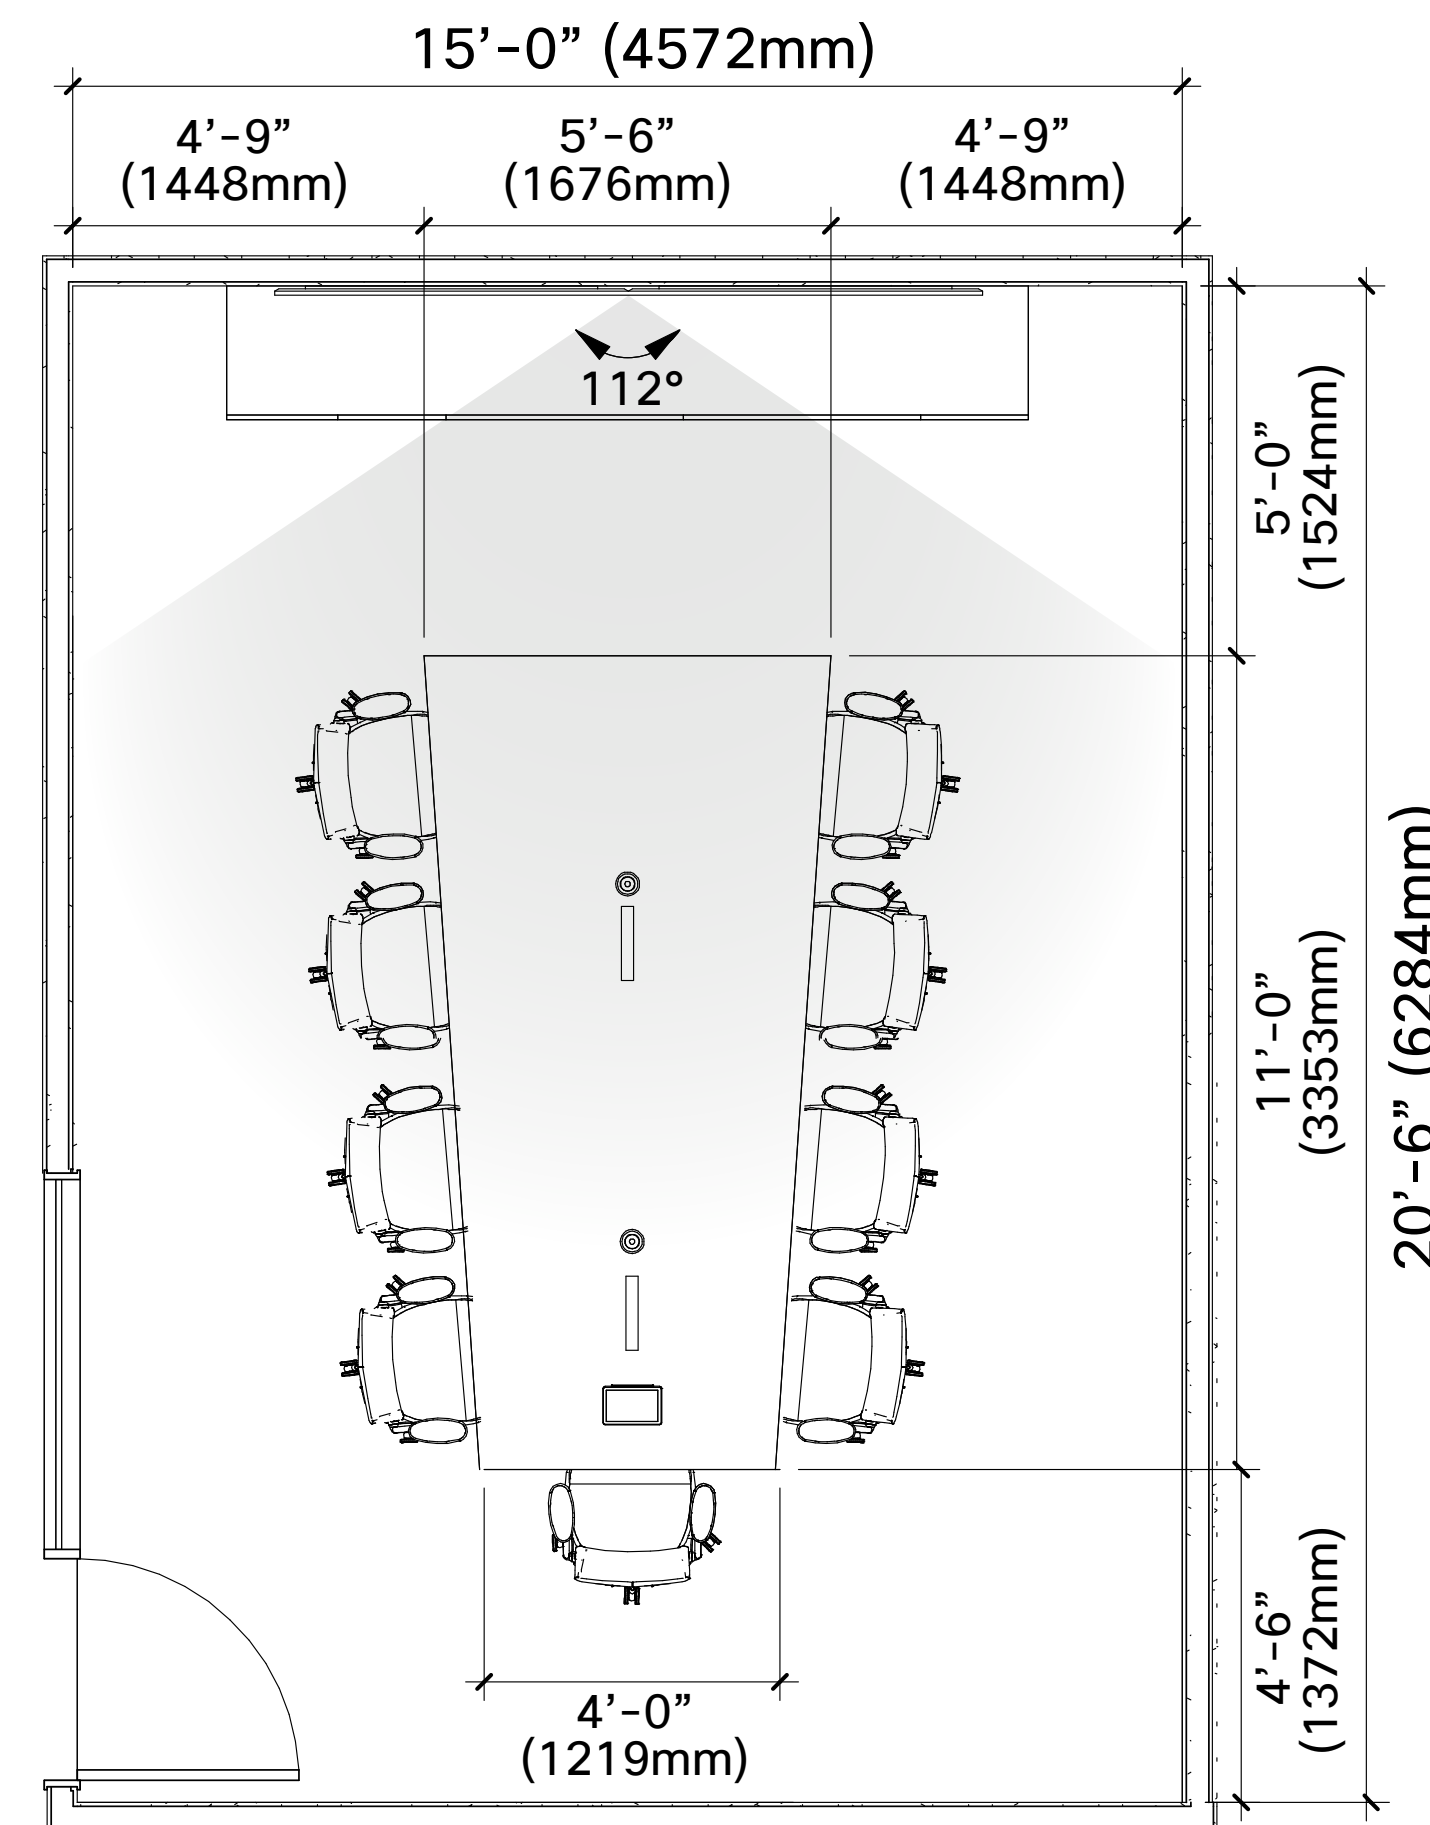


Composite Plan

Wall Mount Option

Credenza Option

Graphics Symbols

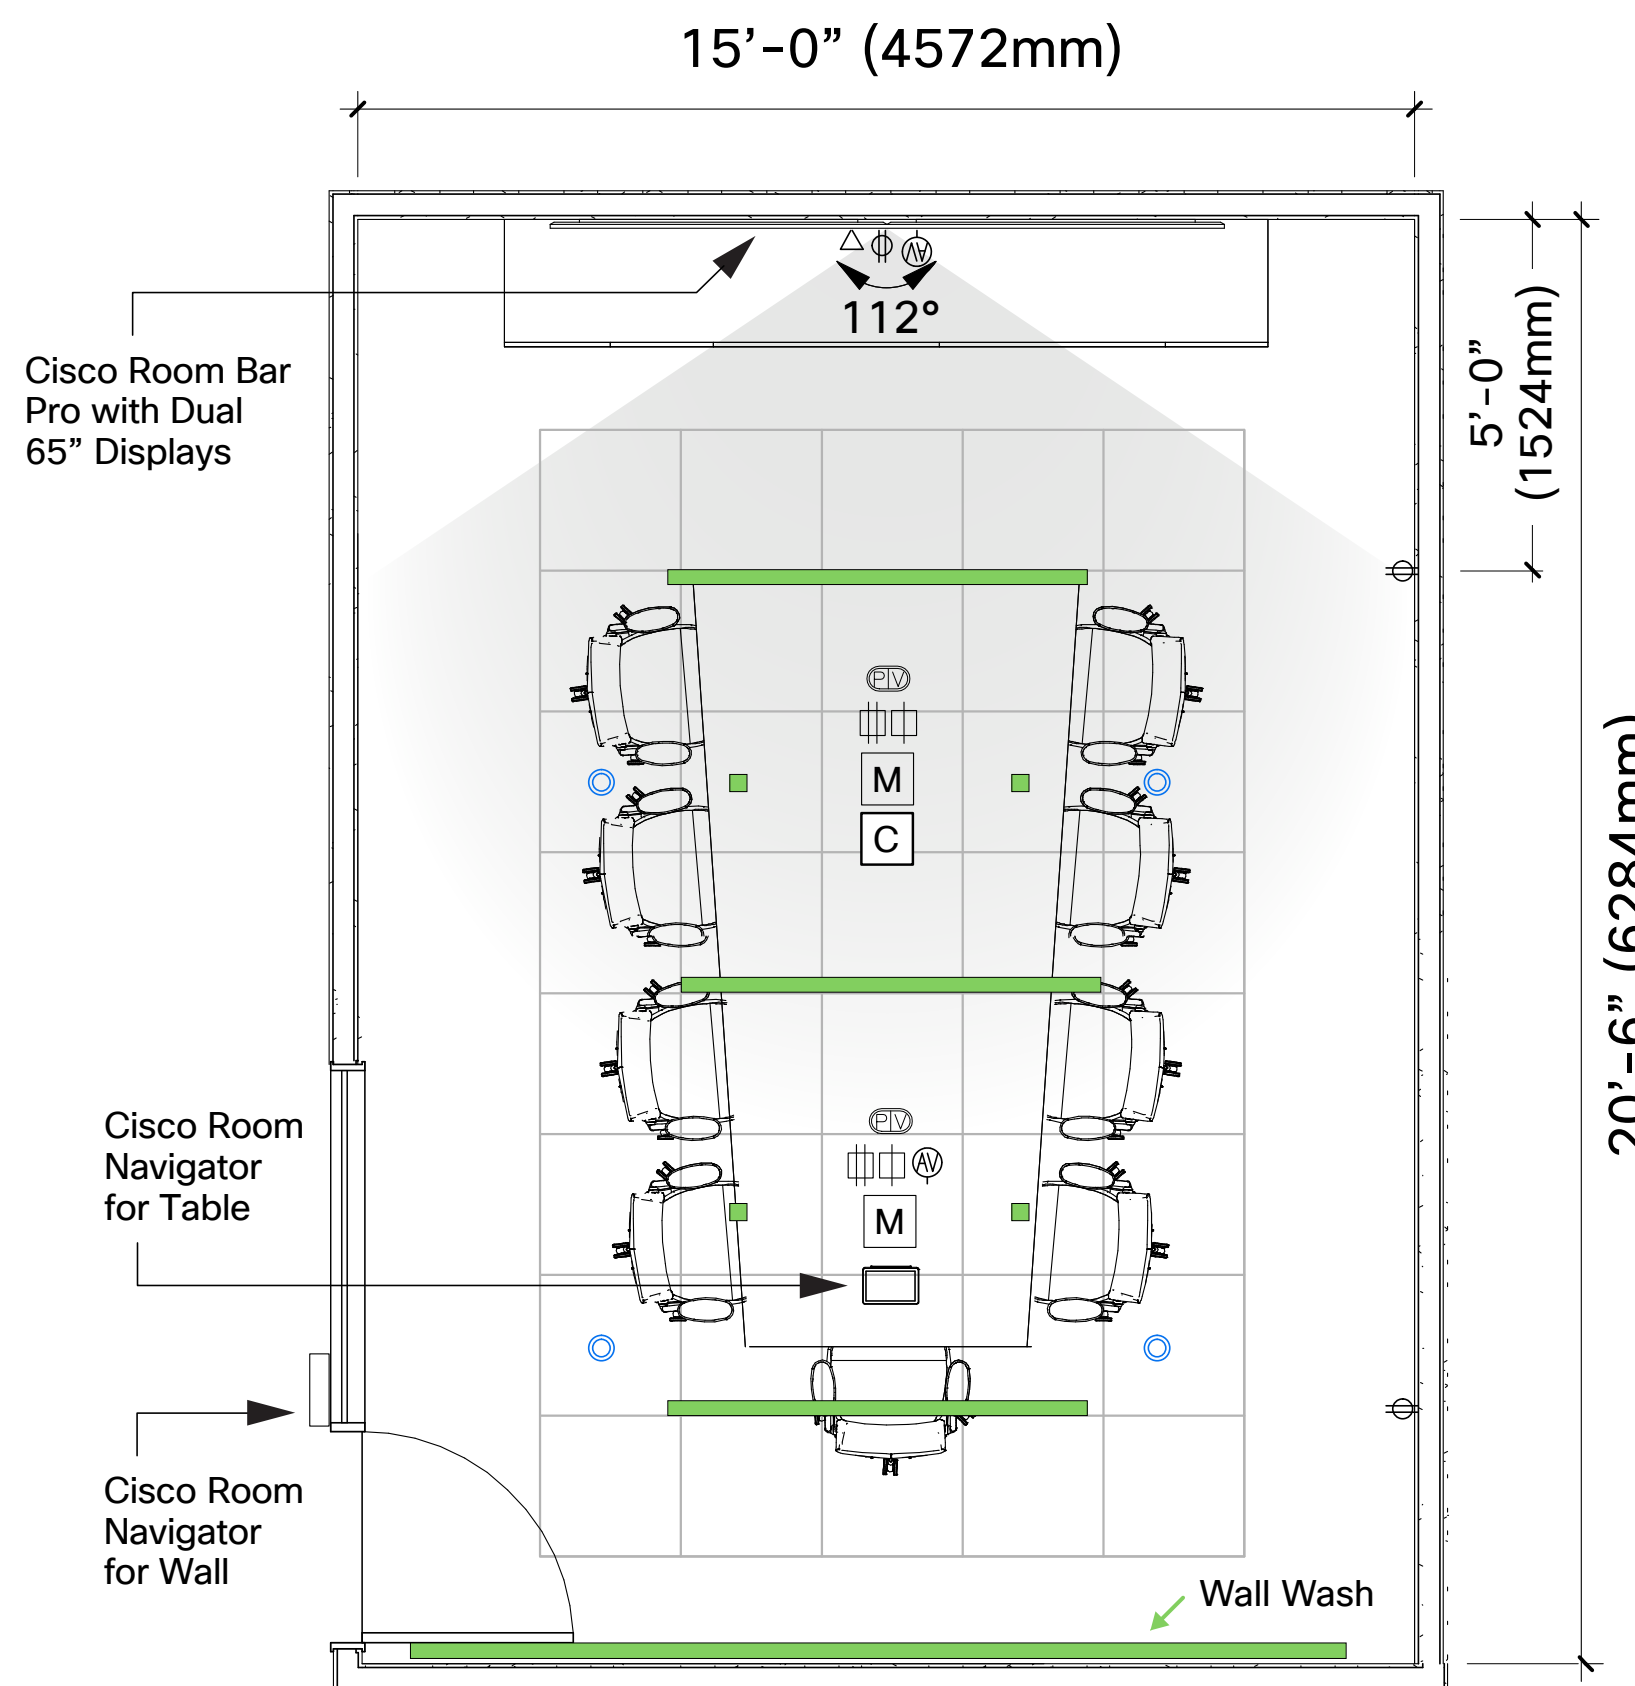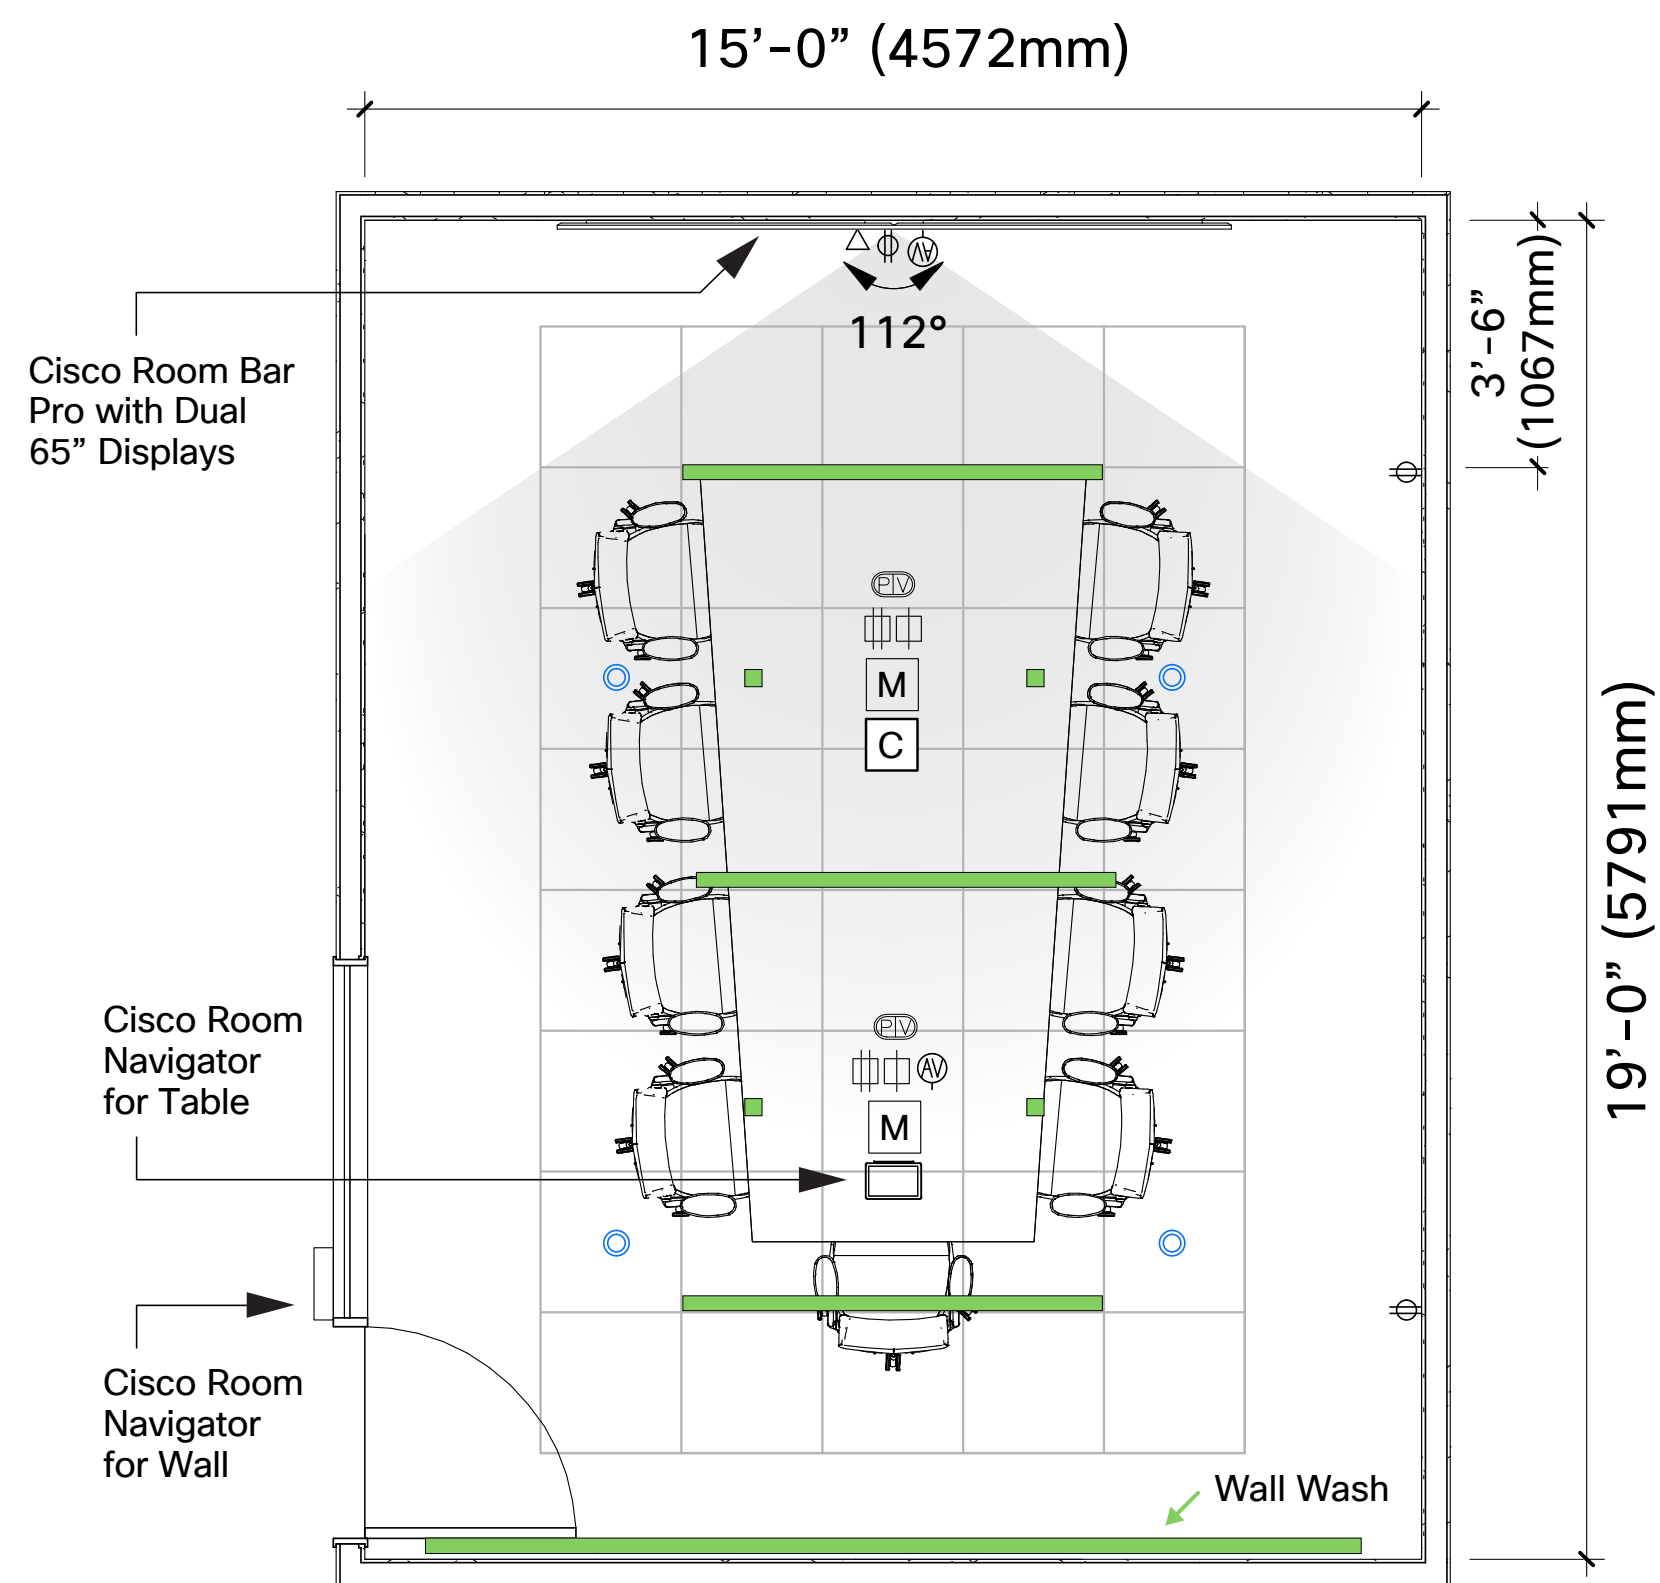

Graphics Symbols

- Acoustical Ceiling & Grid
- HVAC Diffusers (T.B.D.)
Shown as Example Only
- Light Fixtures
- Acoustical Wall

Furniture Systems Version Devices

- Duplex Receptacle & Grid
- Data Receptacle

Power and Communication

WALL / CEILING / FLOOR VERSION DEVICES

- Cisco Ceiling Microphone Pro
- Third Party Speakers (Optional)
- Duplex Receptacle
- Data Receptacle
- Light Switch
- AV Receptacle
- Table Microphone
- Combination Power & Voice / Data Infeed

Video Device Mounting Options

Cisco Room Bar Pro

There are two mounting options for the device when deploying the Cisco Room Bar Pro. Several factors will go into determining which option is best.

Wall Mount

Wall Mounted – Requires wall to be blocked and electrical and data to be elevated. Specific wall mount hardware must be determined based on the weight of the displays that are selected.




Credenza

A/V compatible credenza – Freestanding and fully integrated cabinets available from a number of specialized vendors eliminate the requirement for the wall to be blocked and electrical moved. Perfect for new and retrofit installations, allowing for quick and efficient installation.




Room Elevations - Wall Mount Option


Construction Elevation

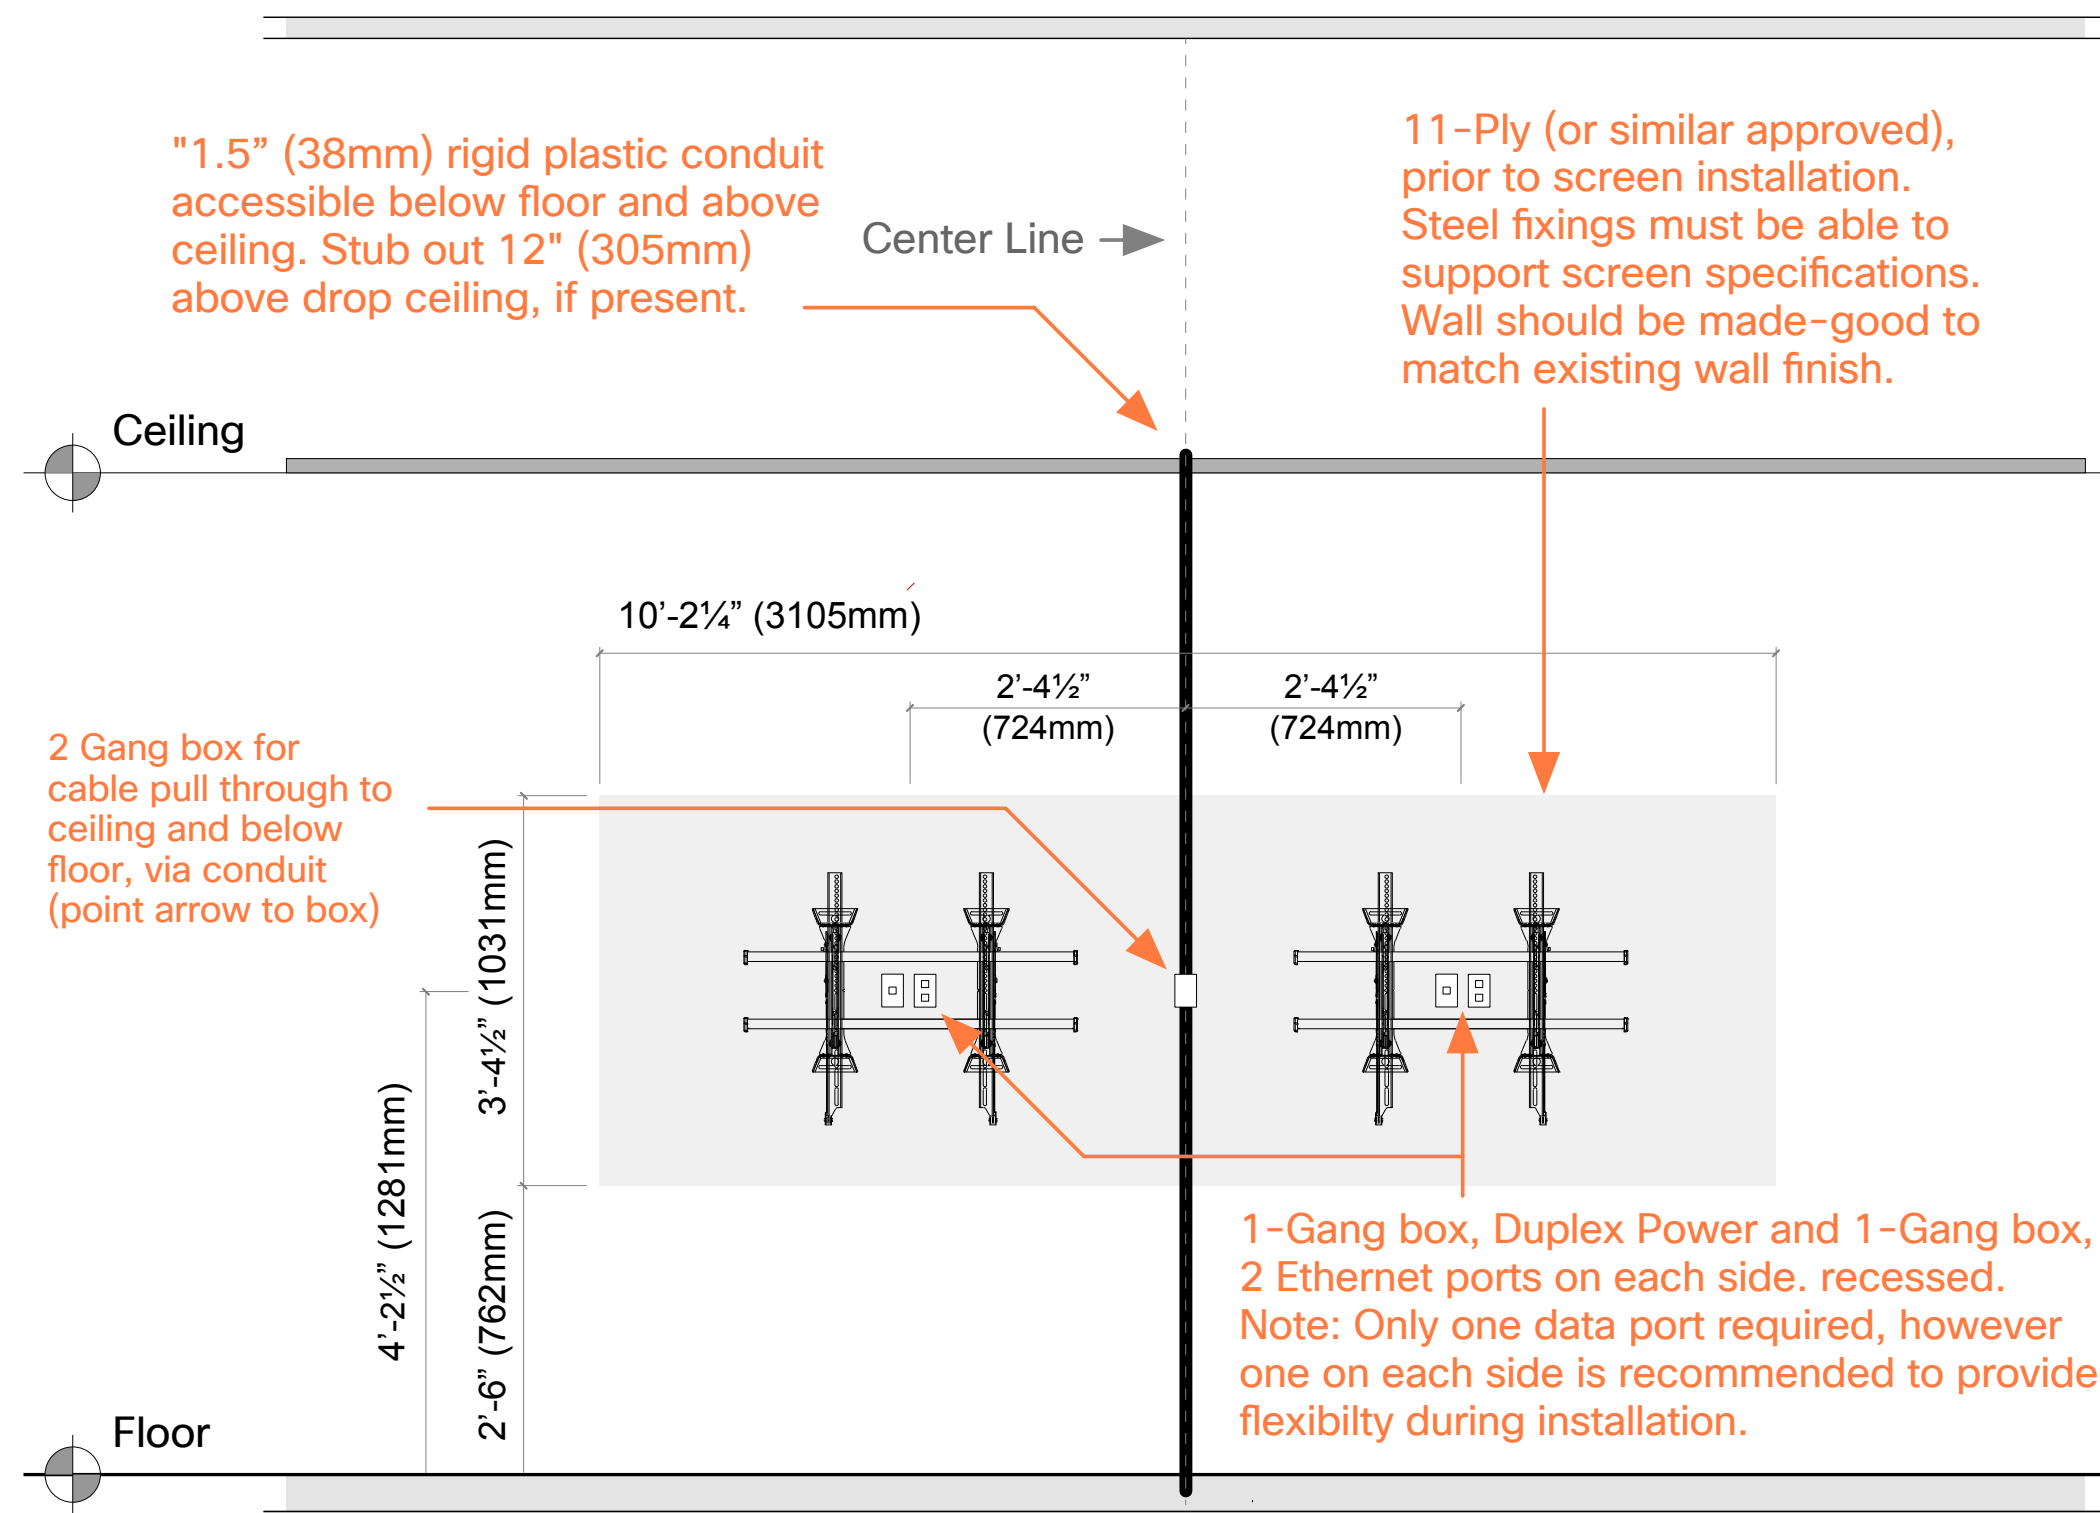

Finished Elevation

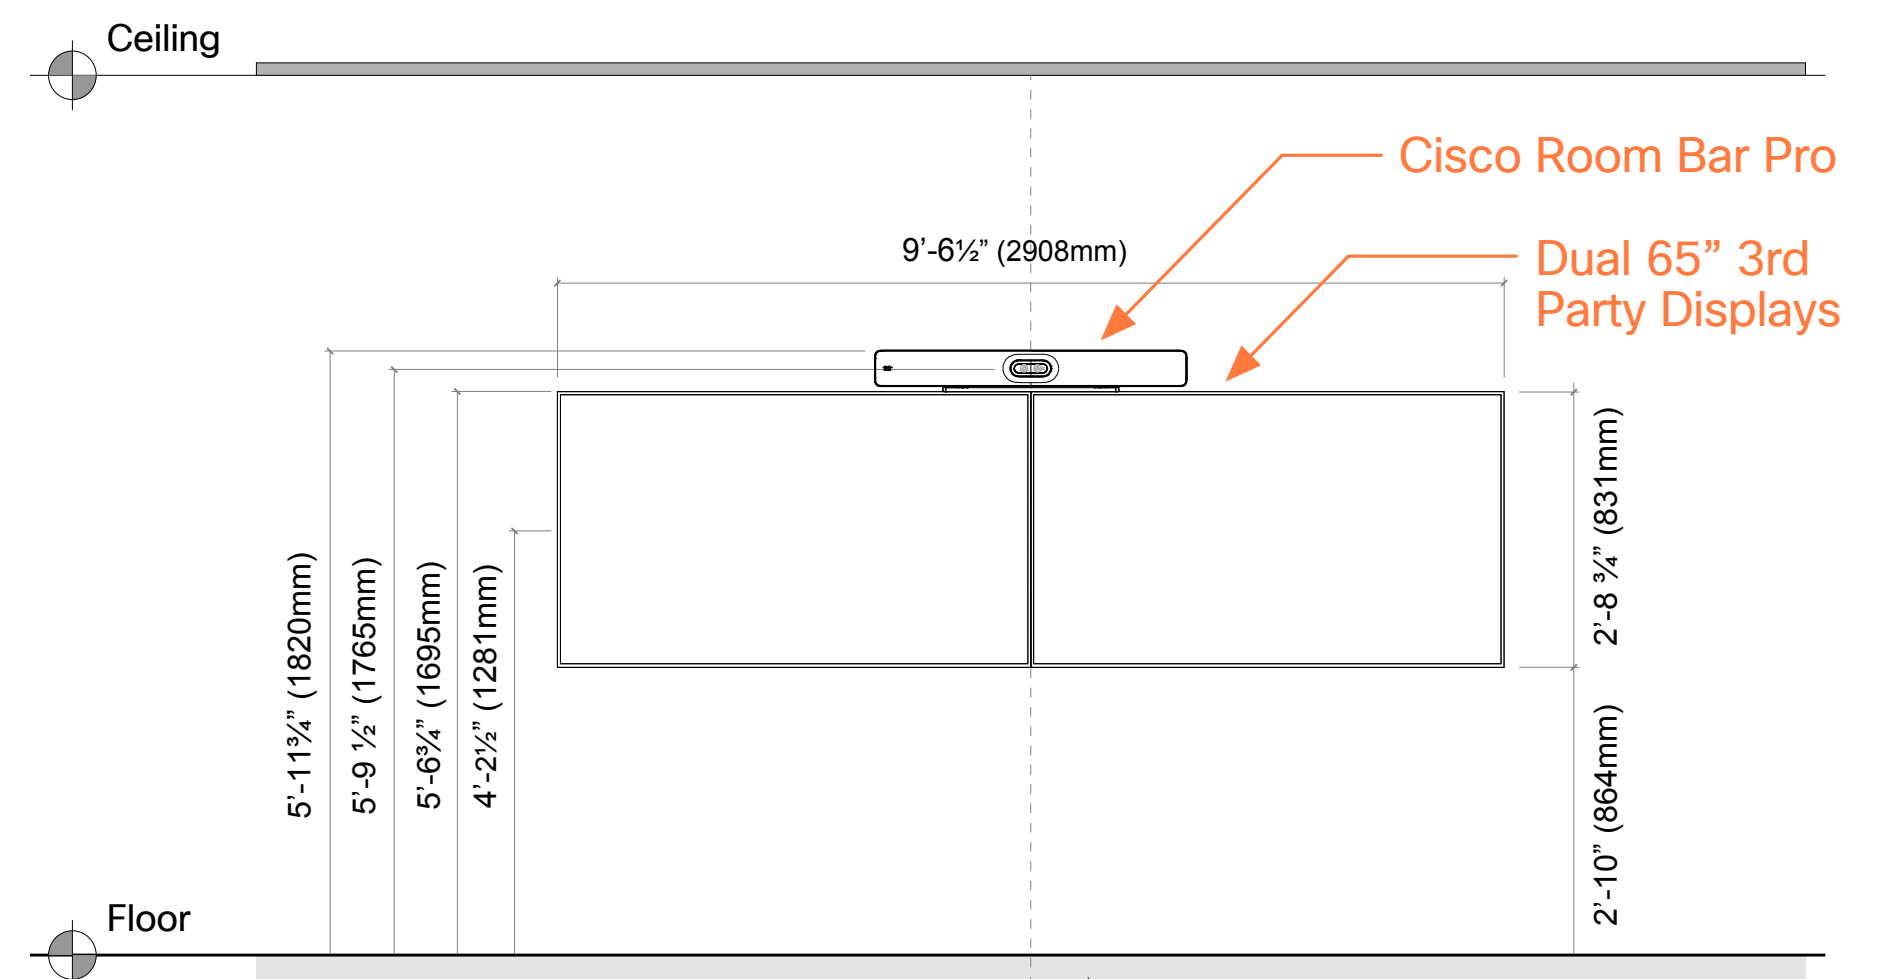


Side Elevation

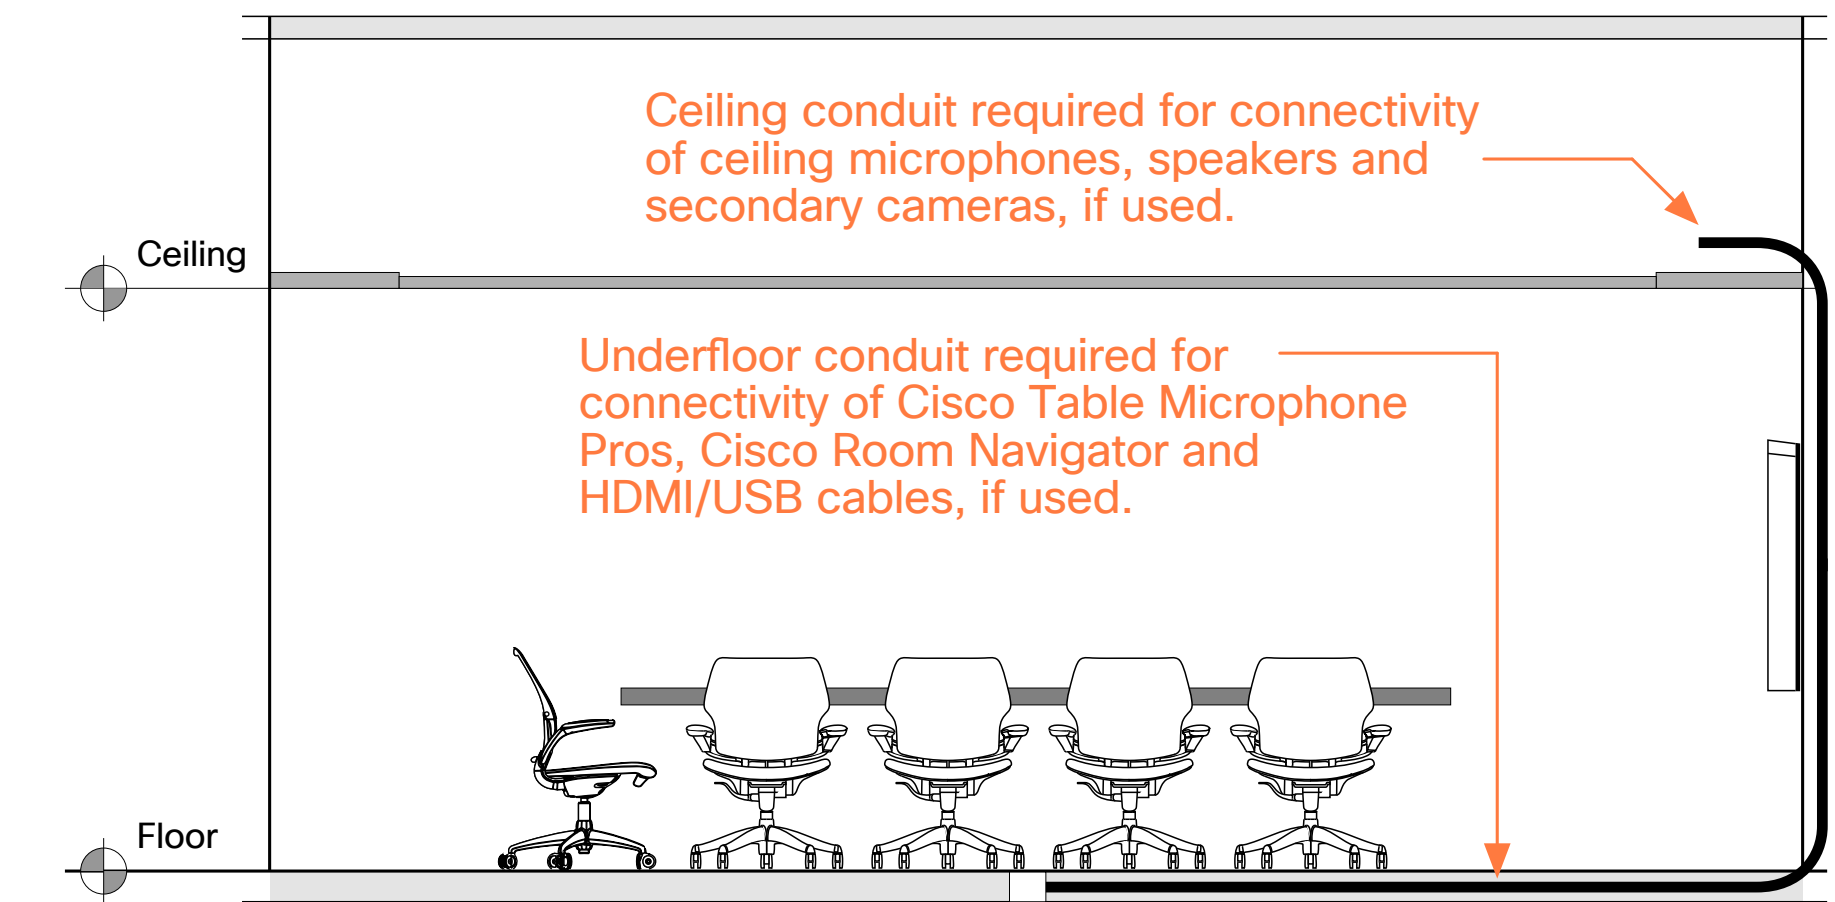


Room Elevations - A/V Credenza Option


Construction Elevation

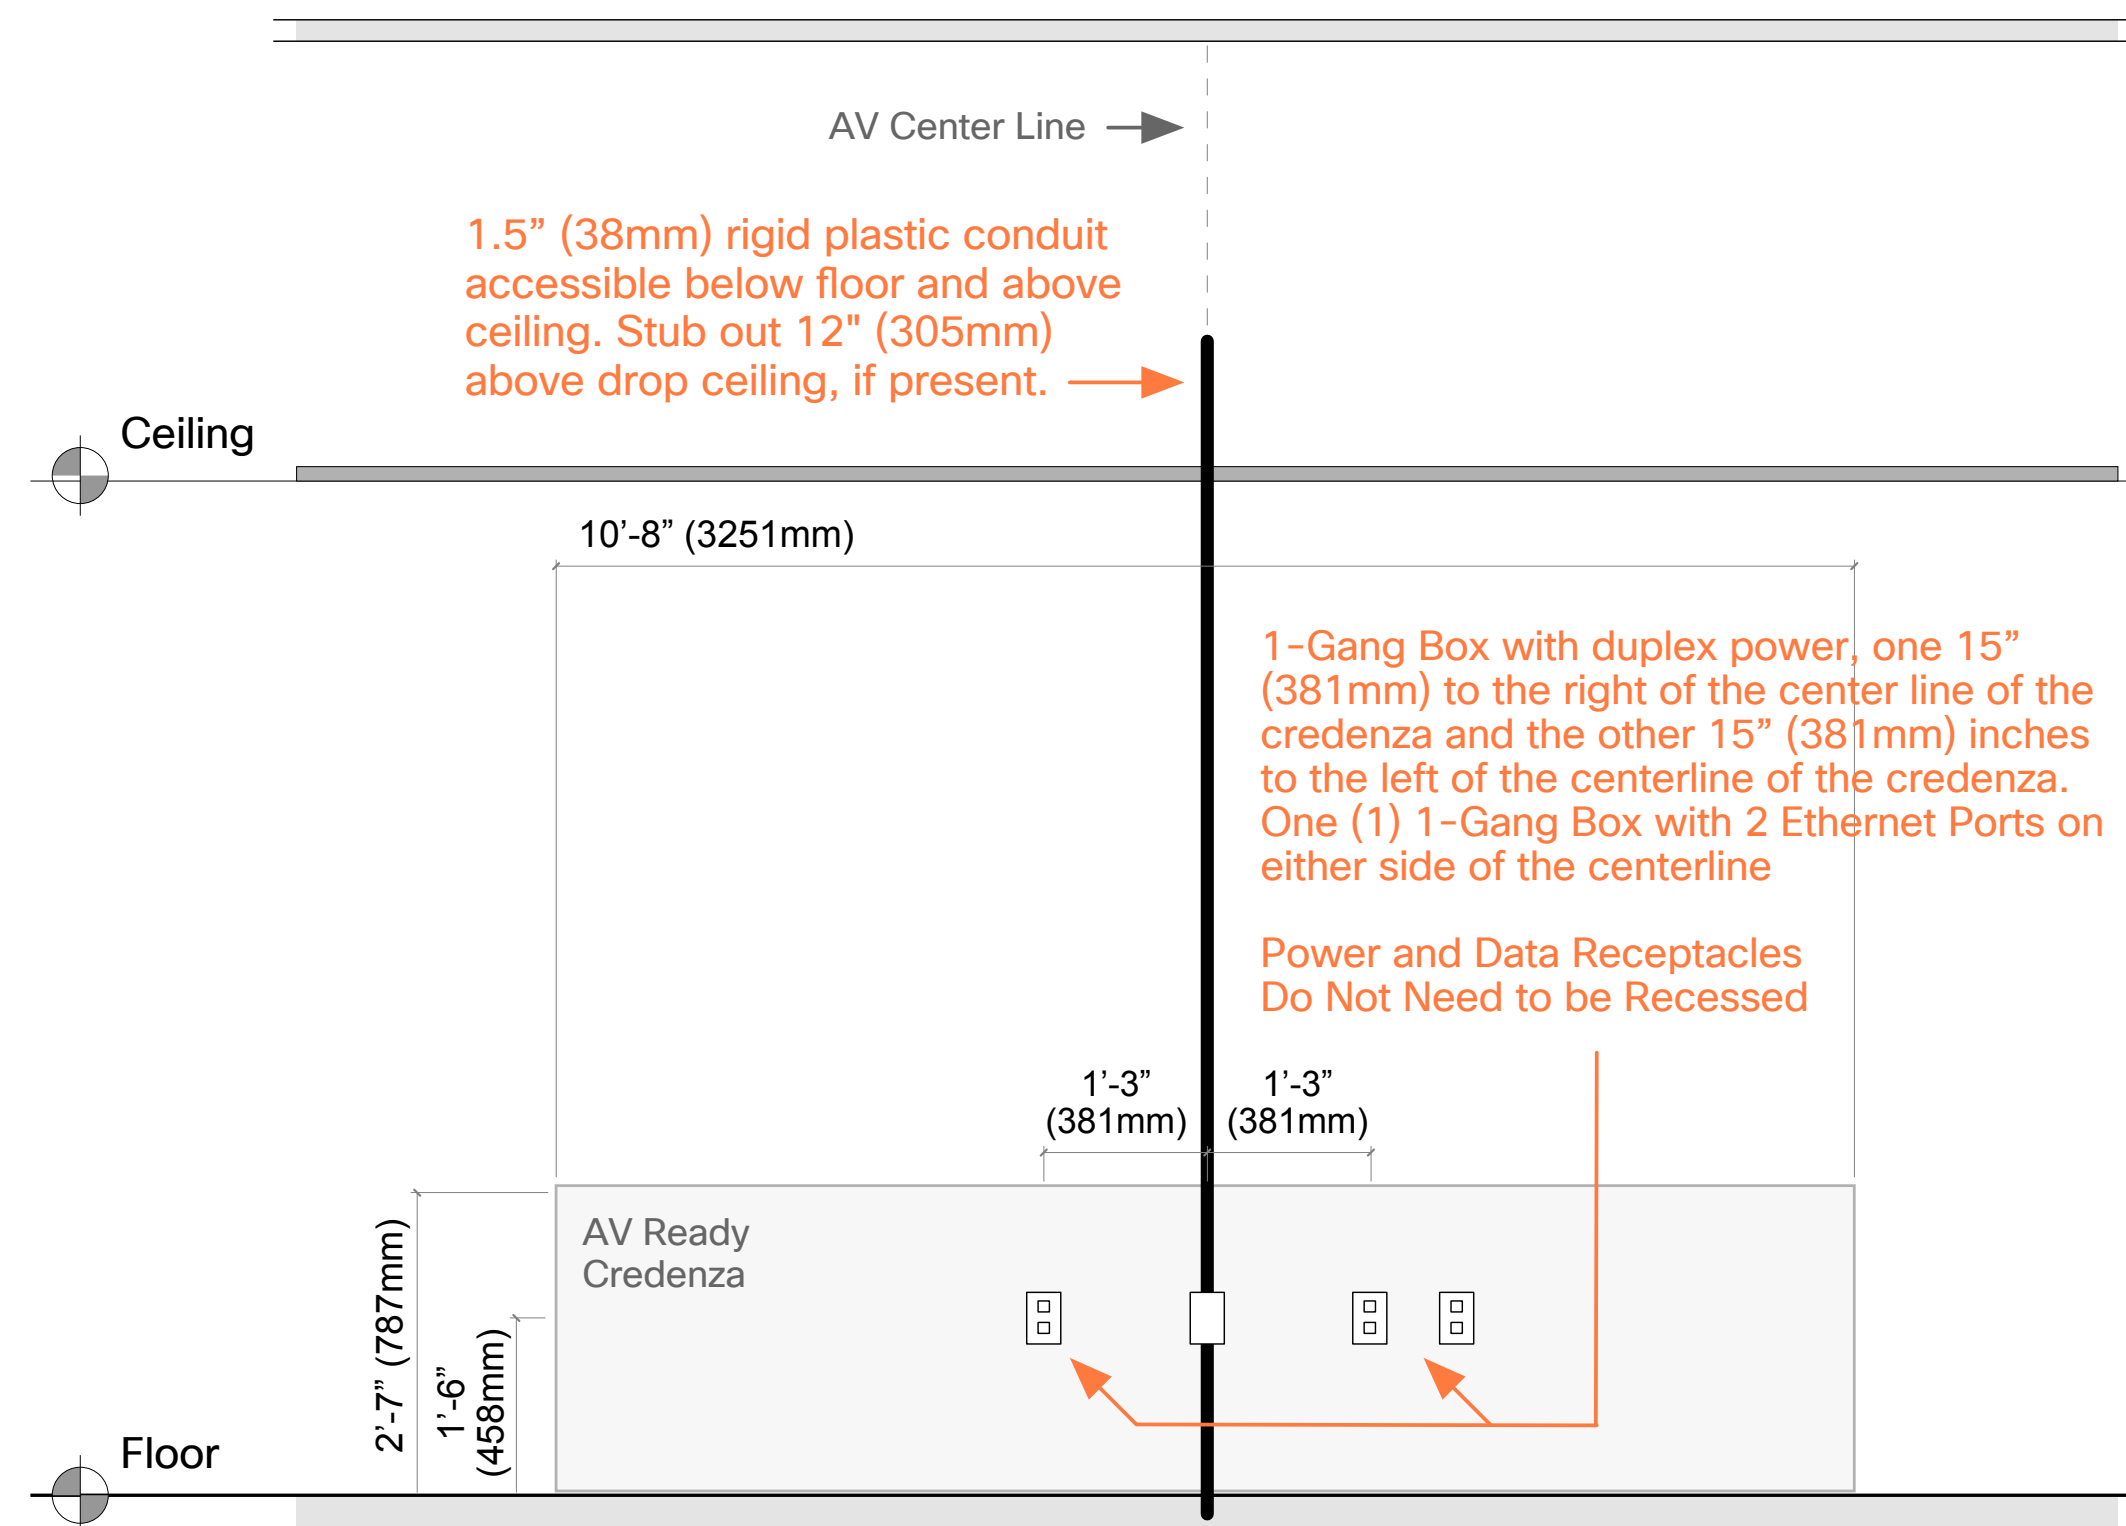

Finished Elevation

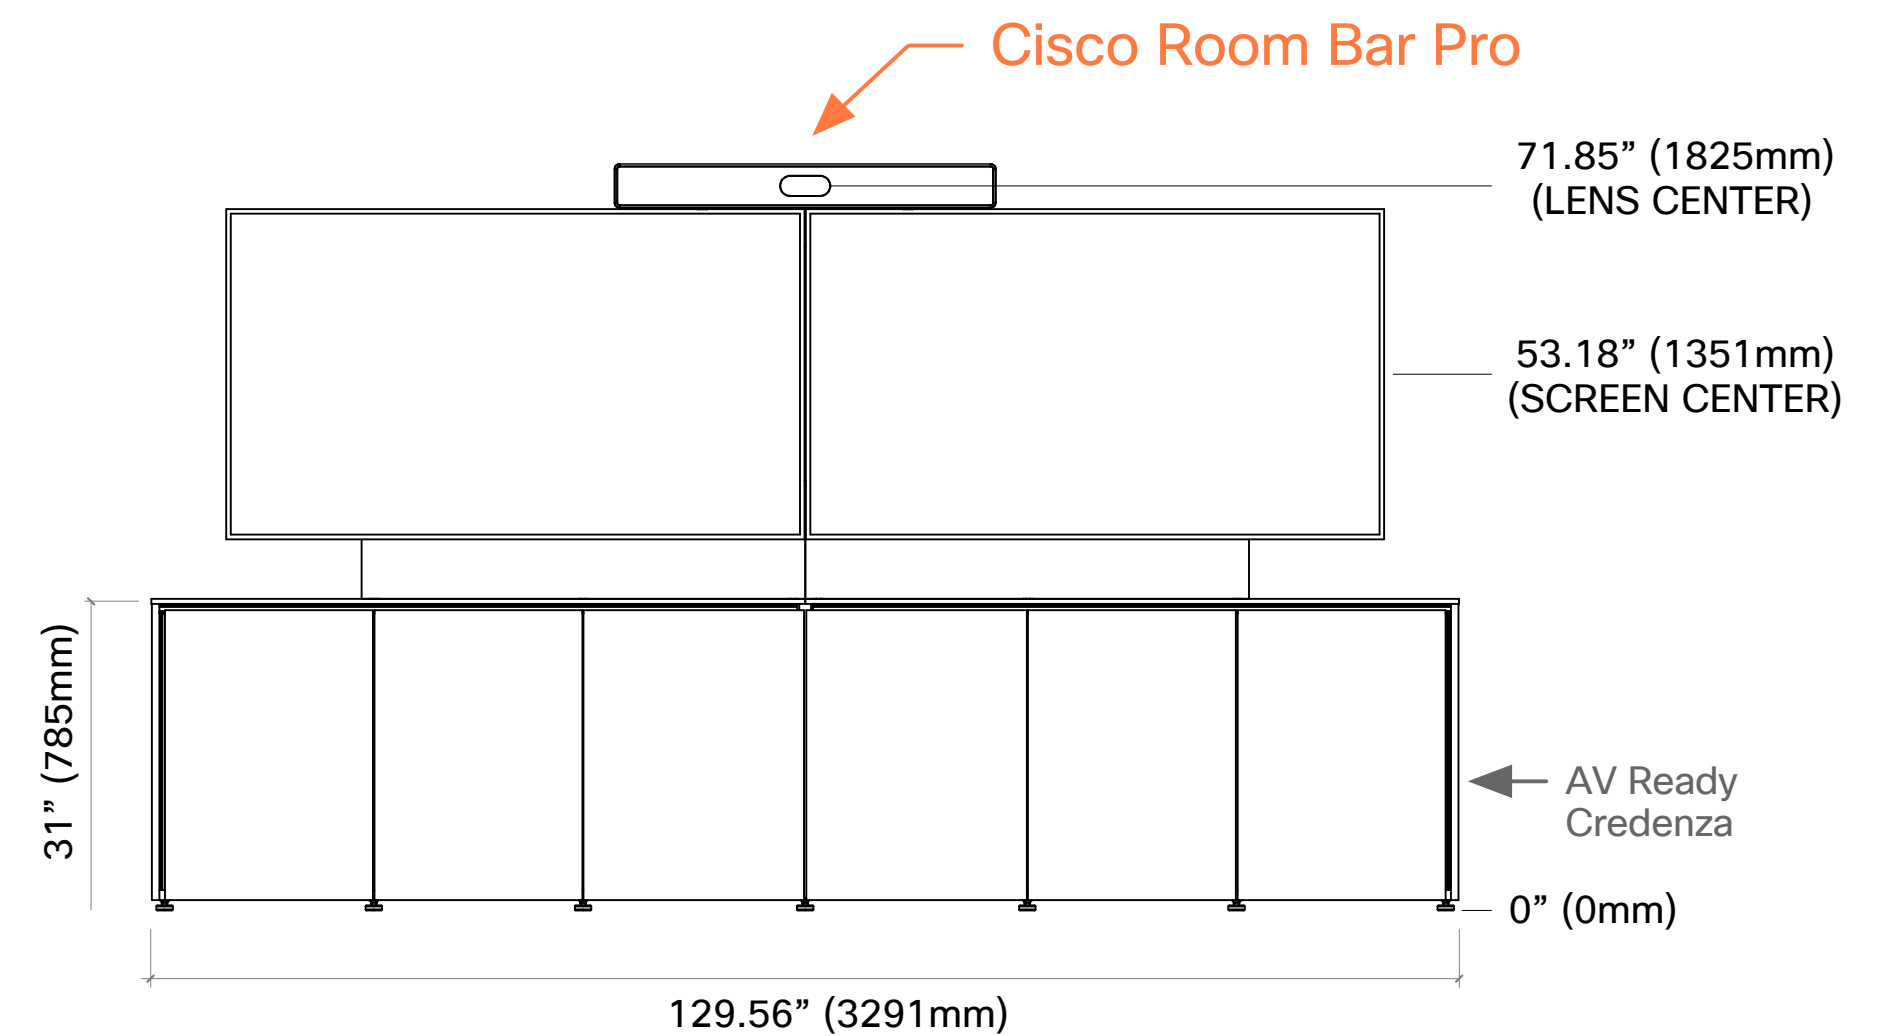

Side Elevation

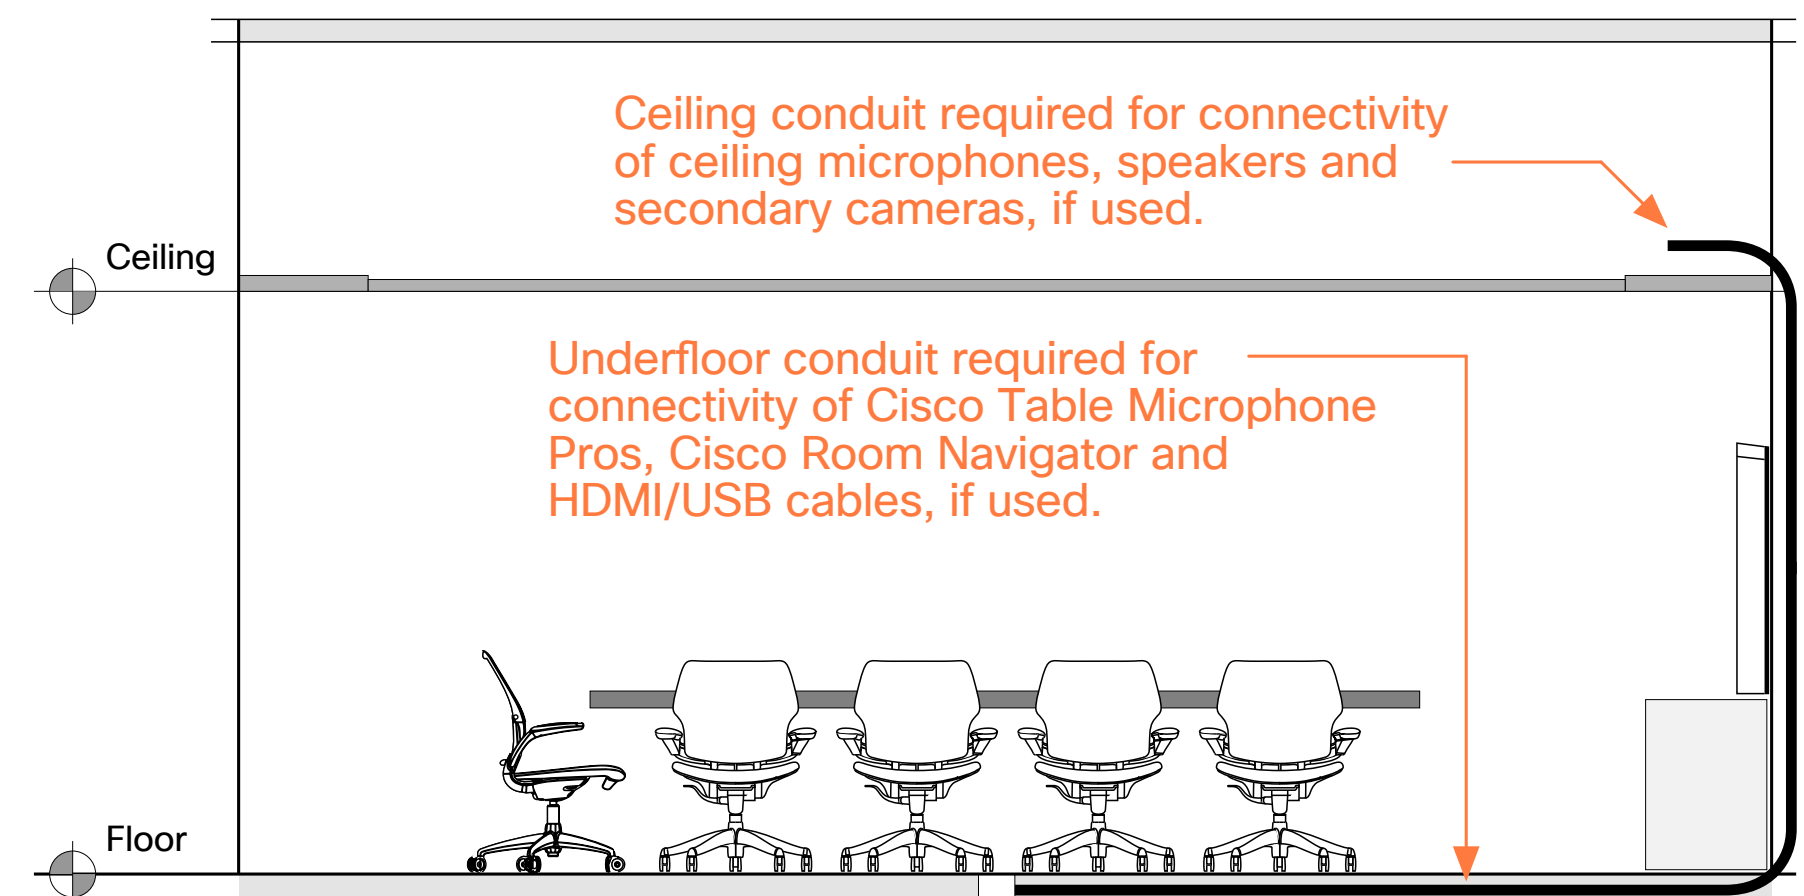

i Note: Configuration shown mounts video device and displays directly on an AV ready credenza.

Reflective Ceiling Plan & Acoustical Treatment




We recommend glare-free luminary with a beam angle of 90° or wider as it serves as both key and fill light, with a color temperature ~4000K and color rendering index (CRI) of 85 or better.




Two walls of acoustical wall treatment is optimal, preferred location is wall opposite device and then adjoining, away from entry location.

Wall Mount Option

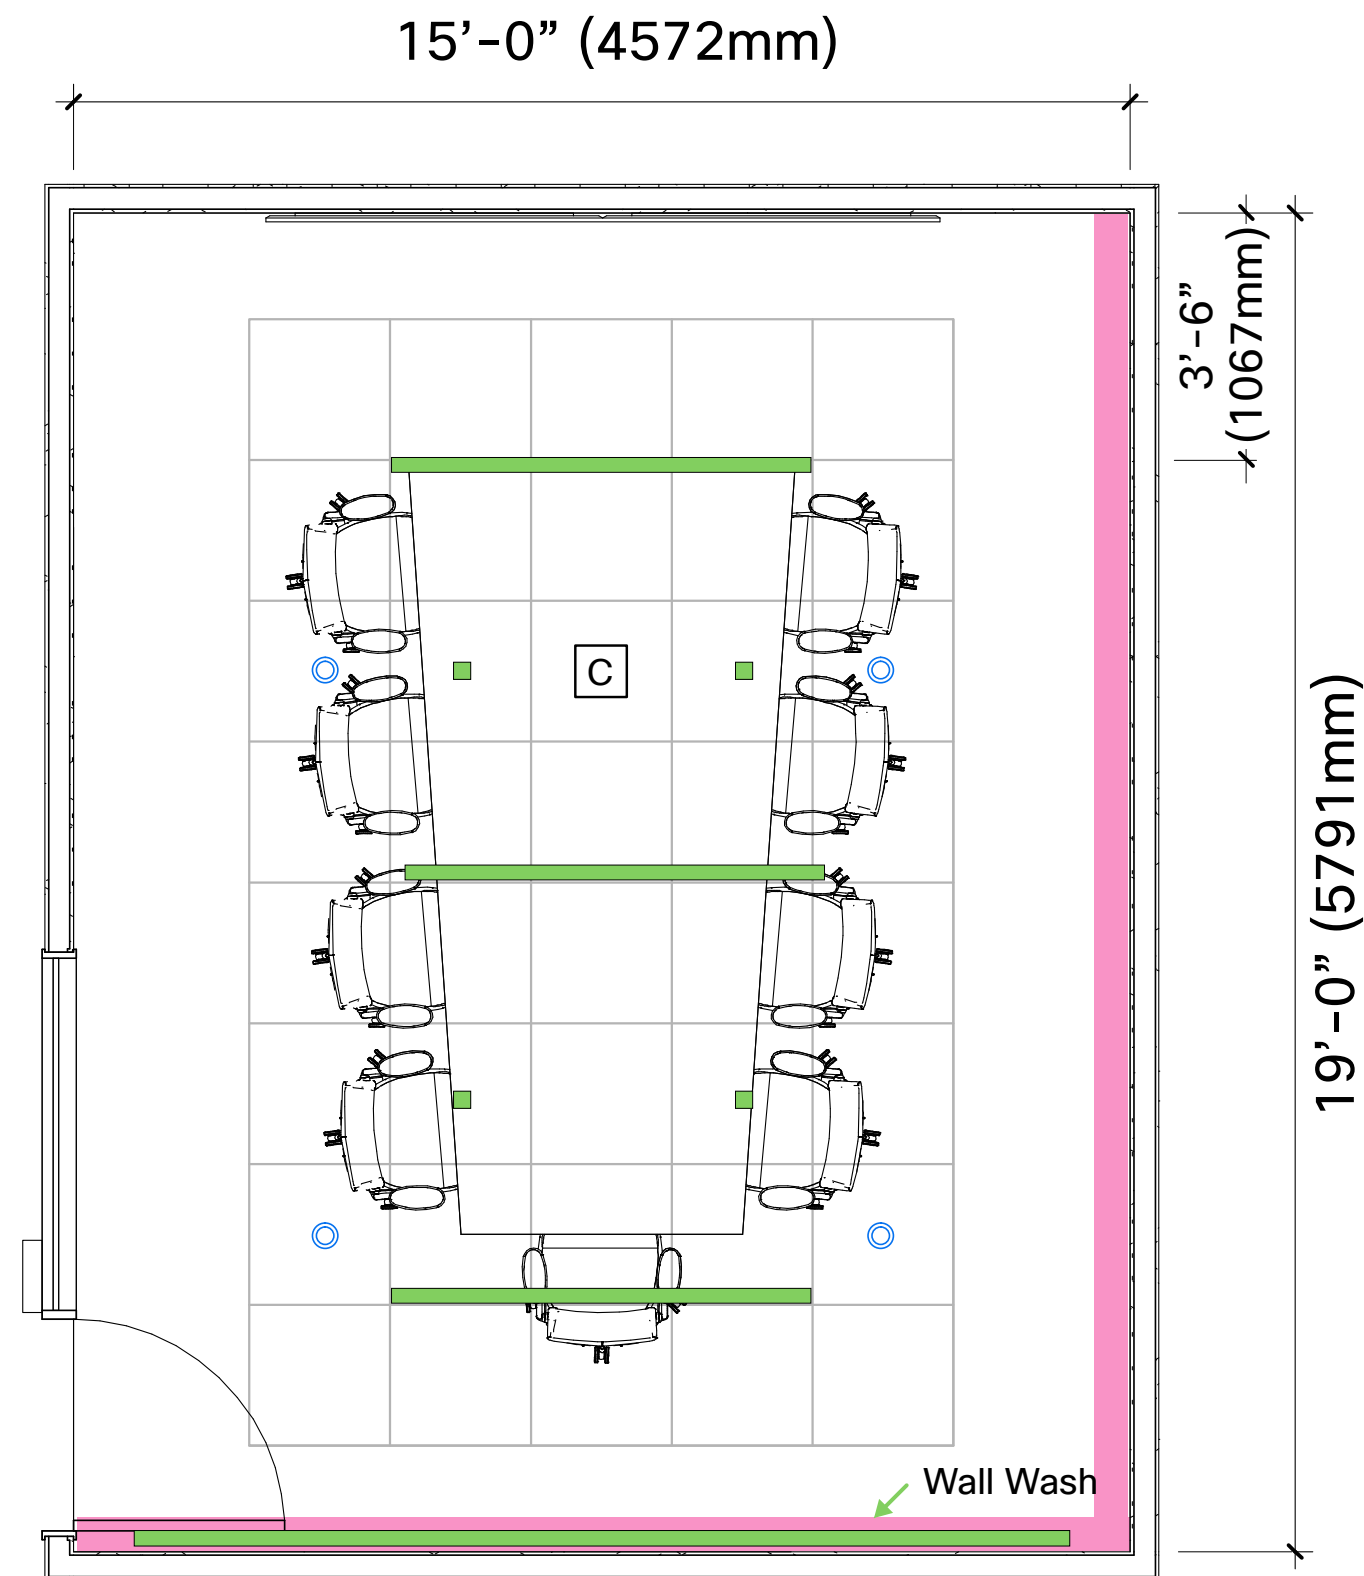

Credenza Option

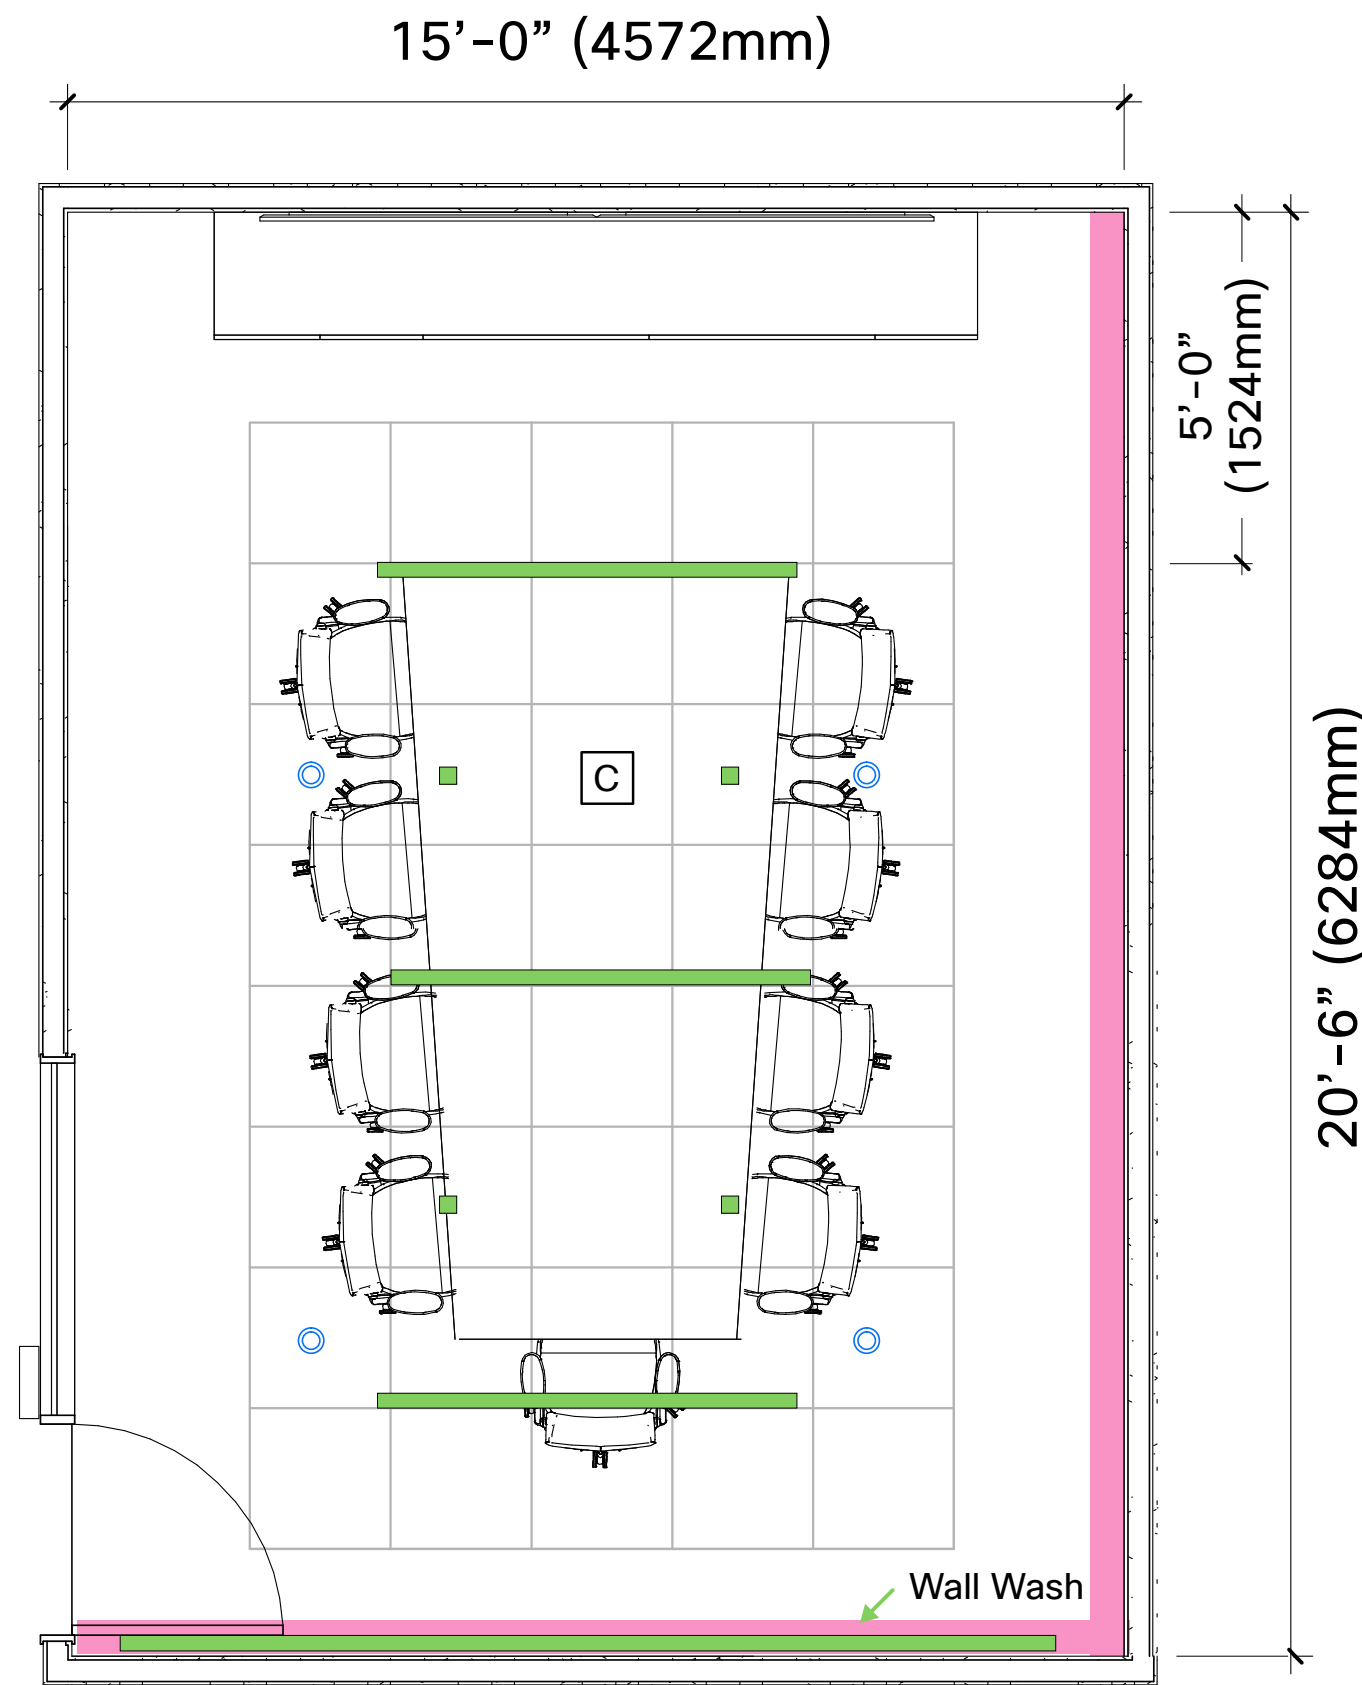

Graphics Symbols

- Acoustical Ceiling & Grid
- HVAC Diffusers (T.B.D.)
Shown as Example Only
- Light Fixtures
- Acoustical Wall
- Furniture Systems Version Devices**
- Duplex Receptacle & Grid
- Data Receptacle
- Power and Communication**
- WALL / CEILING / FLOOR VERSION DEVICES**
- Cisco Ceiling Microphone Pro
- Third Party Speakers (Optional)
- Duplex Receptacle
- Data Receptacle
- Light Switch
- AV Receptacle
- Table Microphone
- Combination Power & Voice / Data Infeed



Medium Collaboration Room

Power & Data

General Specifications

Power/data requirements need to be verified for each project. Provide video device power/data even if the project plan does not include it on day one. Based on the design of this space, core drills and floor boxes will be required.

Power in Tabletop

User power should be surface mounted in the tabletop. If pop-ups or table wells are used, it is important to verify that they can accommodate all laptop power supplies. Provide shared power – 1 power port for every two seats.

Power & Data

Provide two (2) duplex power outlets and one data receptacle with two ethernet ports on the wall behind the video device (a second data receptacle with either one or two ports can be added for redundancy and/or future use). The exact location of these will depend on the mounting option selected. Suggested locations can be found in the elevations section of this document, but the exact location should be verified with the mount manufacturer or the A/V partner doing the installation. Additional power and data ports may also be required under the table for a PoE compatible switch, based on how the Cisco Room Navigator and/or Cisco Microphone Pros are deployed.

Exploded IT Diagram



Cisco Room Navigator for Table (required)

The preferred method of connectivity for the Cisco Room Navigator for Table is directly to the designated PoE port on the back of the Cisco Bar Pro via an Ethernet cable. Alternatively, the Room Navigator can also be connected to a PoE compatible switch mounted under the table, which then connects directly back to the designated PoE port on the Room Bar Pro, or directly to the network switch via a Ethernet jack in the floor (hidden by the table leg).

Cisco Room Navigator for Wall

It is recommended to run the cable inside the wall or through the door frame directly back to a network switch.

Cisco Microphones

Although not technically required for a room of this size, either a single Cisco Ceiling Microphone Pro or two (2) Cisco Table Microphone Pros are highly recommended. The Room Bar Pro has two (2) general use PoE ports that can be used for either the Cisco Ceiling Microphone or Cisco Table Microphone Pros. If more than two (2) Cisco Table Microphone Pros are needed then an under-table mounted PoE compatible Switch will be required.

Third-party Speakers

Although not typically required for this space, they can be used if local conditions warrant. (Requires conduit behind device to ceiling.)

Table Top Charging


USB-C charging and convenience outlets on table top. Ensure the size of the trough and layout can accommodate a variety of laptop power supplies.

Wall Blocking


Required when the device is wall-mounted. The size and composition of blocking materials should be determined based on the overall weight of the solution deployed.

Core Drilling

Core Drill-Preferred method for providing connectivity between the table and the Cisco Room Bar Pro for the Cisco Room Navigator for Table, Cisco Table Microphones and/or A/V cables. If core drilling is not an option, a floor cable cover or wire concealer can be used.

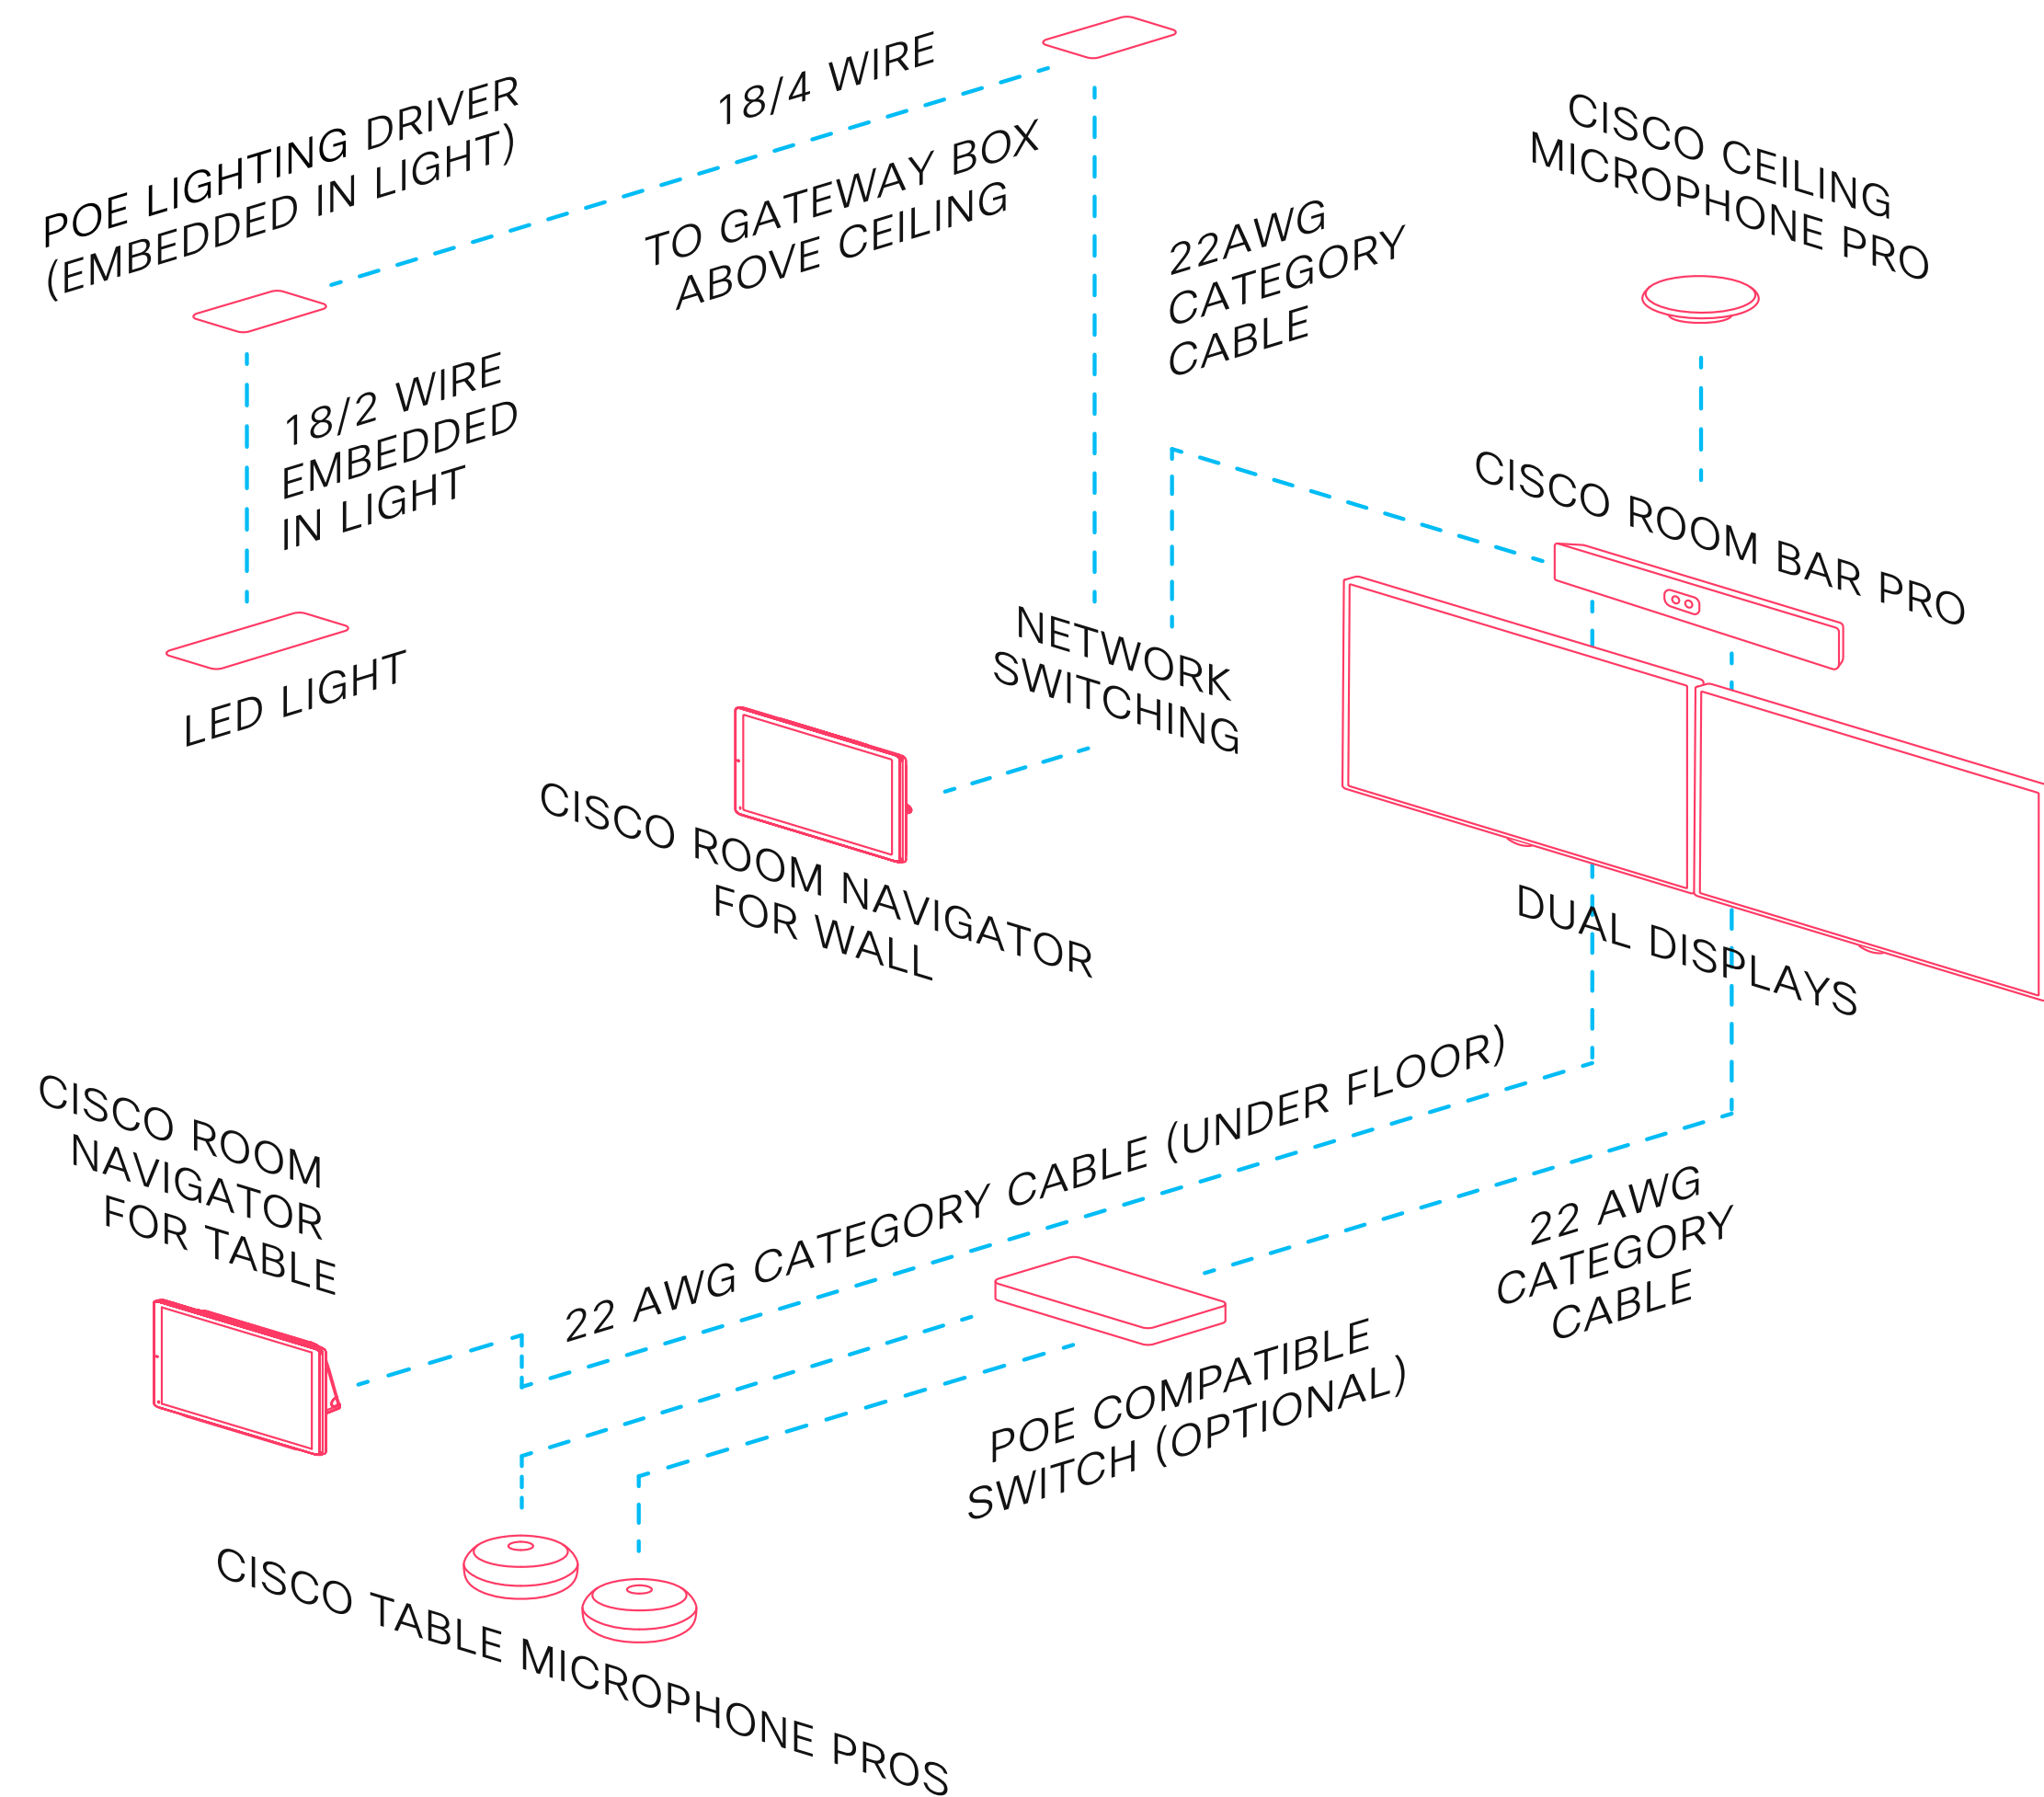

Connectivity View

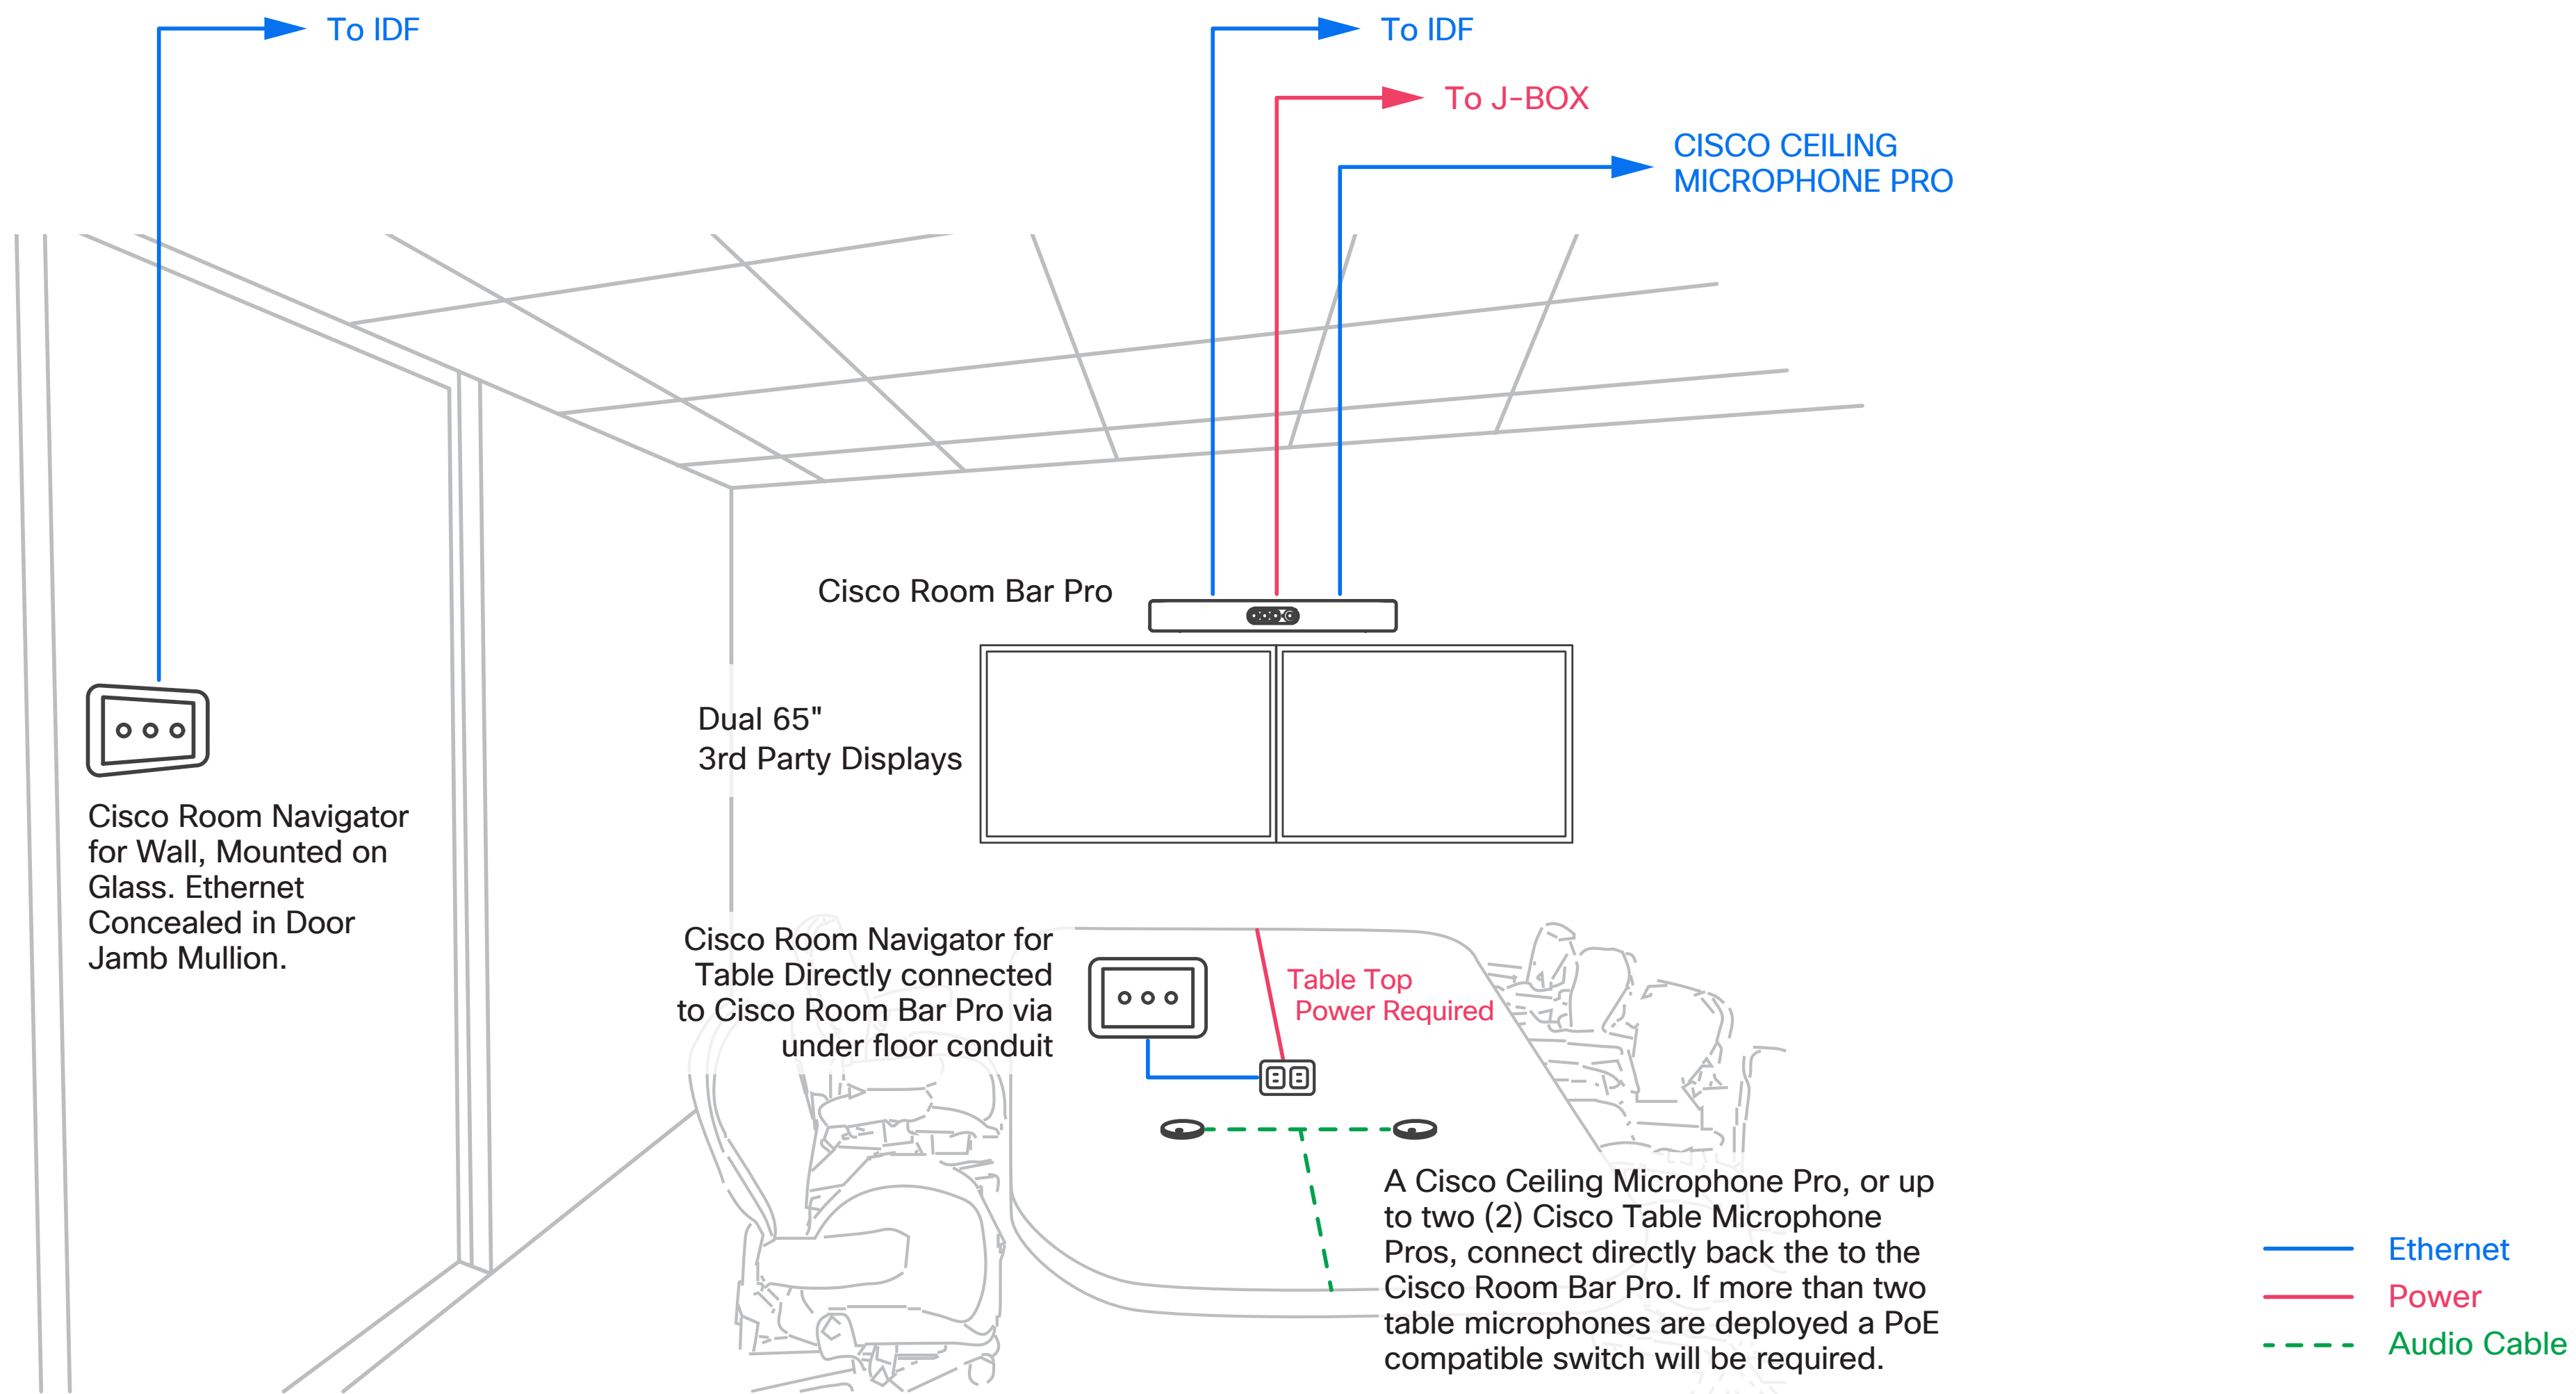

IT/OT Bill of Material

Cisco Products

Cisco Room Bar Pro Option:

- **CS-BARPRO-C-K9.** Cisco Room Bar Pro - Carbon Black (with Cisco Room Navigator for Table, mounting kit and accessories)
- **CS-MIC-TABLE-J** Cisco Table Microphone (Qty 2)
- **C1200-8FP-2G** Cisco Catalyst 1200 Series PoE Switch (or equivalent) - Optional
- **CS-MIC-CLGPRO** Cisco Ceiling Microphone Pro (Qty 1) - Optional
- **CS-T10-WM-K9=** Cisco Room Navigator for Wall

Non-Cisco peripherals

- Dual 65" Video Displays
 - Third-party wall mount or AV-ready credenza
-

IOT Devices

- IAQ coming from the Cisco Room Navigator, No additional IoT IAQ
- Occupancy sensing is coming from the Cisco Endpoints
- Suggested lighting specifications: 220LPW raw, 140LPW delivered
- Each Medium Collaboration room POE lights being power by 4 ports on the ceiling
- Traditional DC Wall Switch
- Ensure device is not connected to ASHRAE 90.1 outlet

External microphones and speakers

- The Cisco Room Bar Pro is equipped with an internal microphone array and is optimized for small to medium sized collaboration spaces, thus external microphones are not technically required if people are seated within 13 feet (4 meters) from the device. That said, we do recommend adding two (2) table microphones to this space to ensure the best audio experience.
 - The Cisco Room Bar Pro has a 3-channel loudspeakers embedded within, third-party external speakers are typically not needed unless room acoustic conditions warrant their use.
-

Medium Collaboration Room

Option 2: Cisco Room Bar Pro with Single Display

Narrow Room Option




Room Layout




Room dimensions shown are the minimal size, based on the technology and furniture options shown.

This single display version is only recommended in spaces where a narrower room design is required, recommended option is to use dual displays whenever possible.

Wall Mount Option

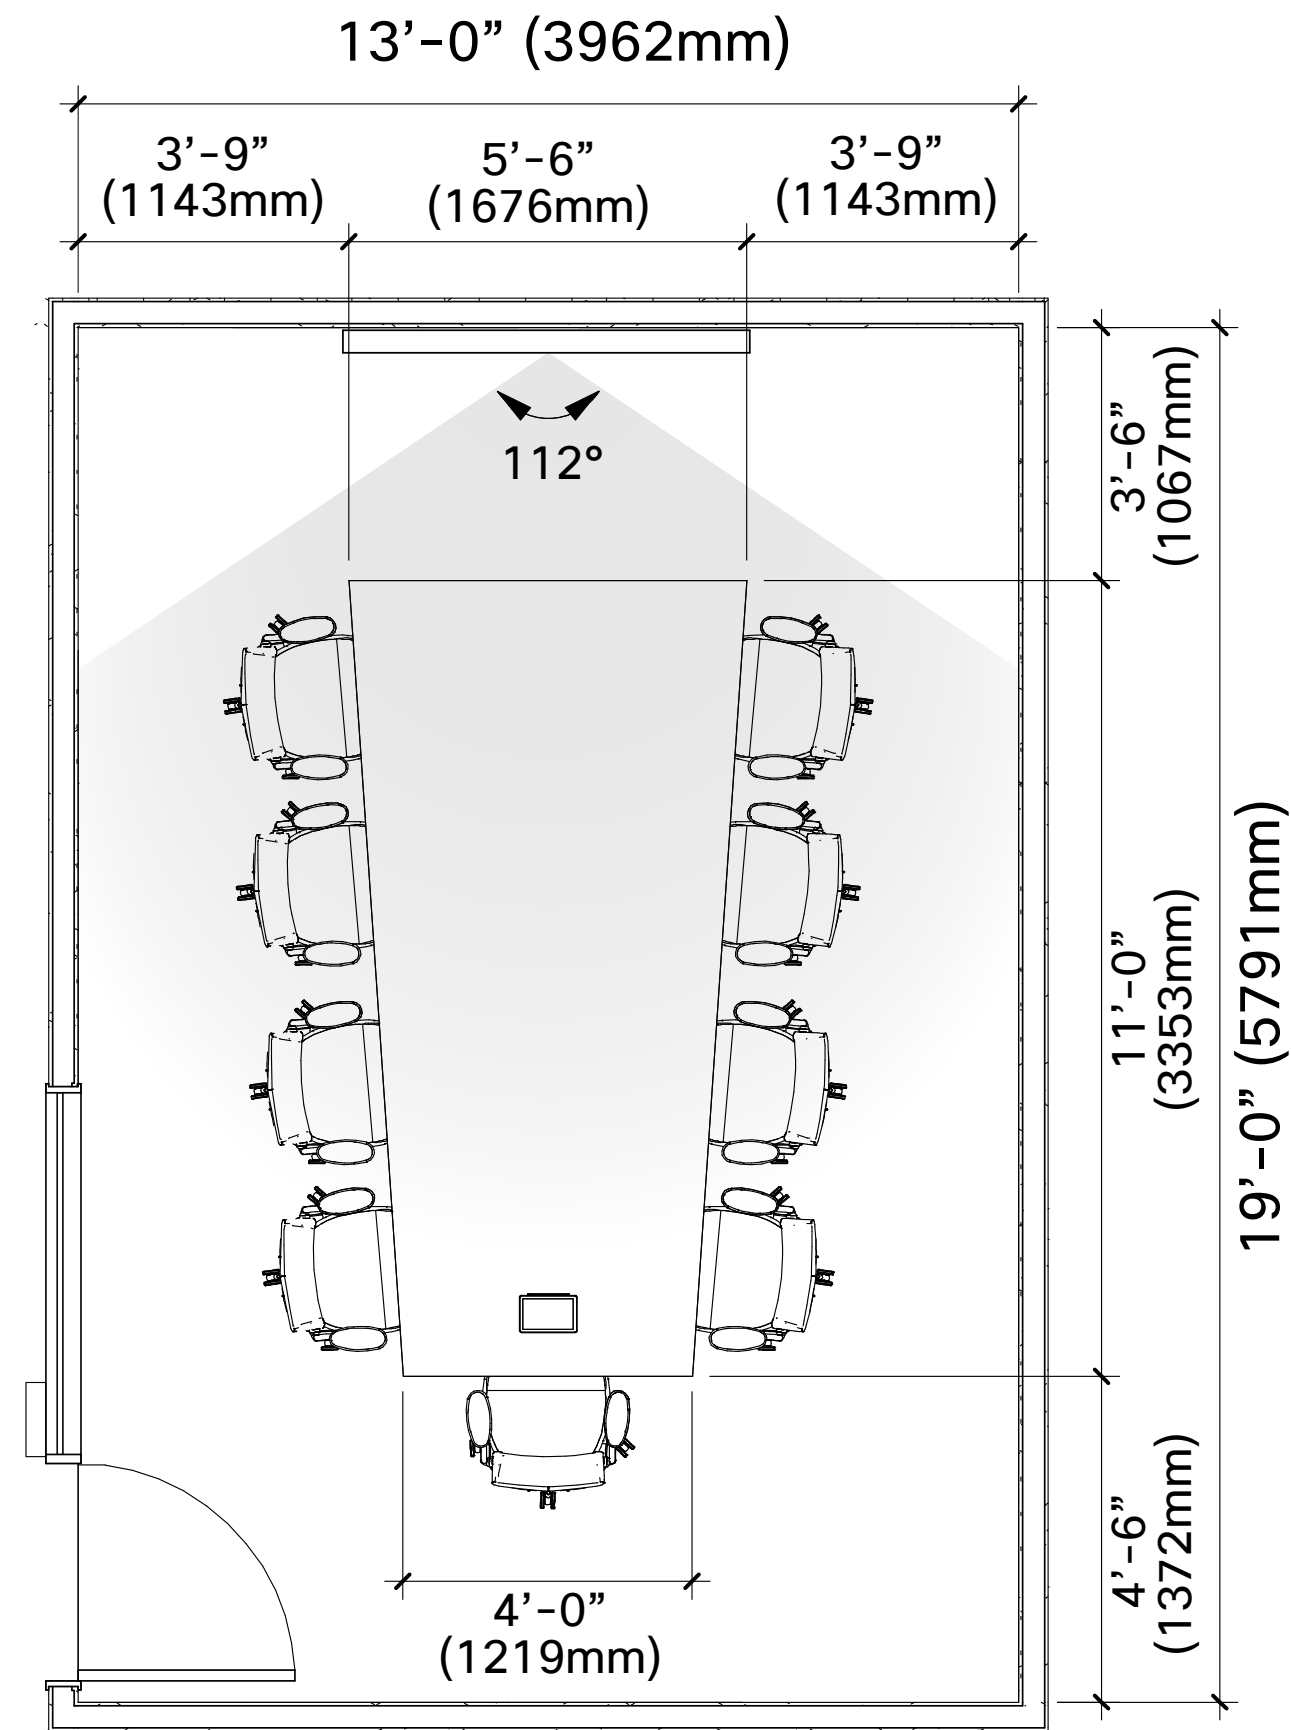


Credenza Option

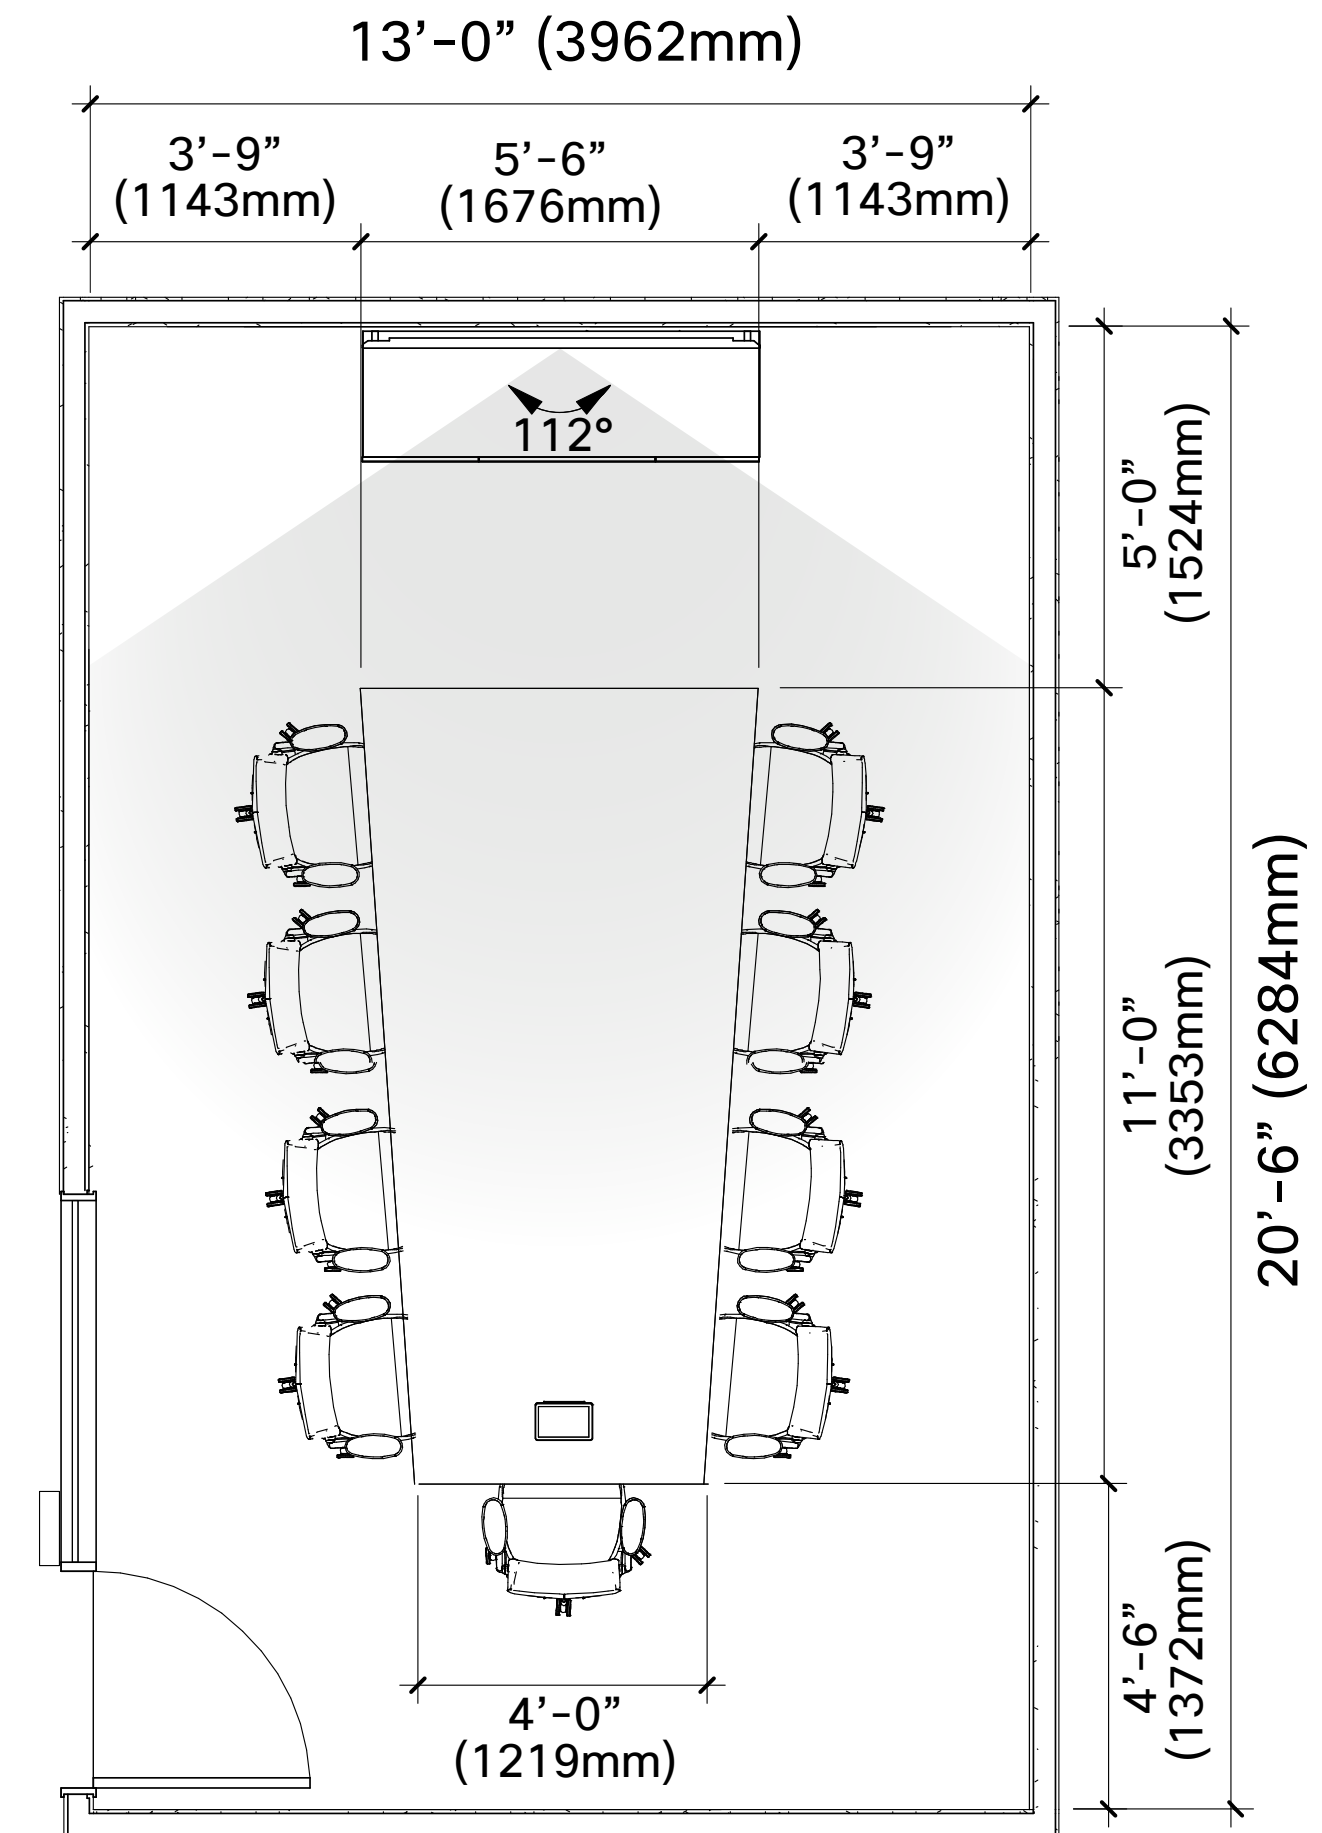


Composite Plan

Wall Mount Option

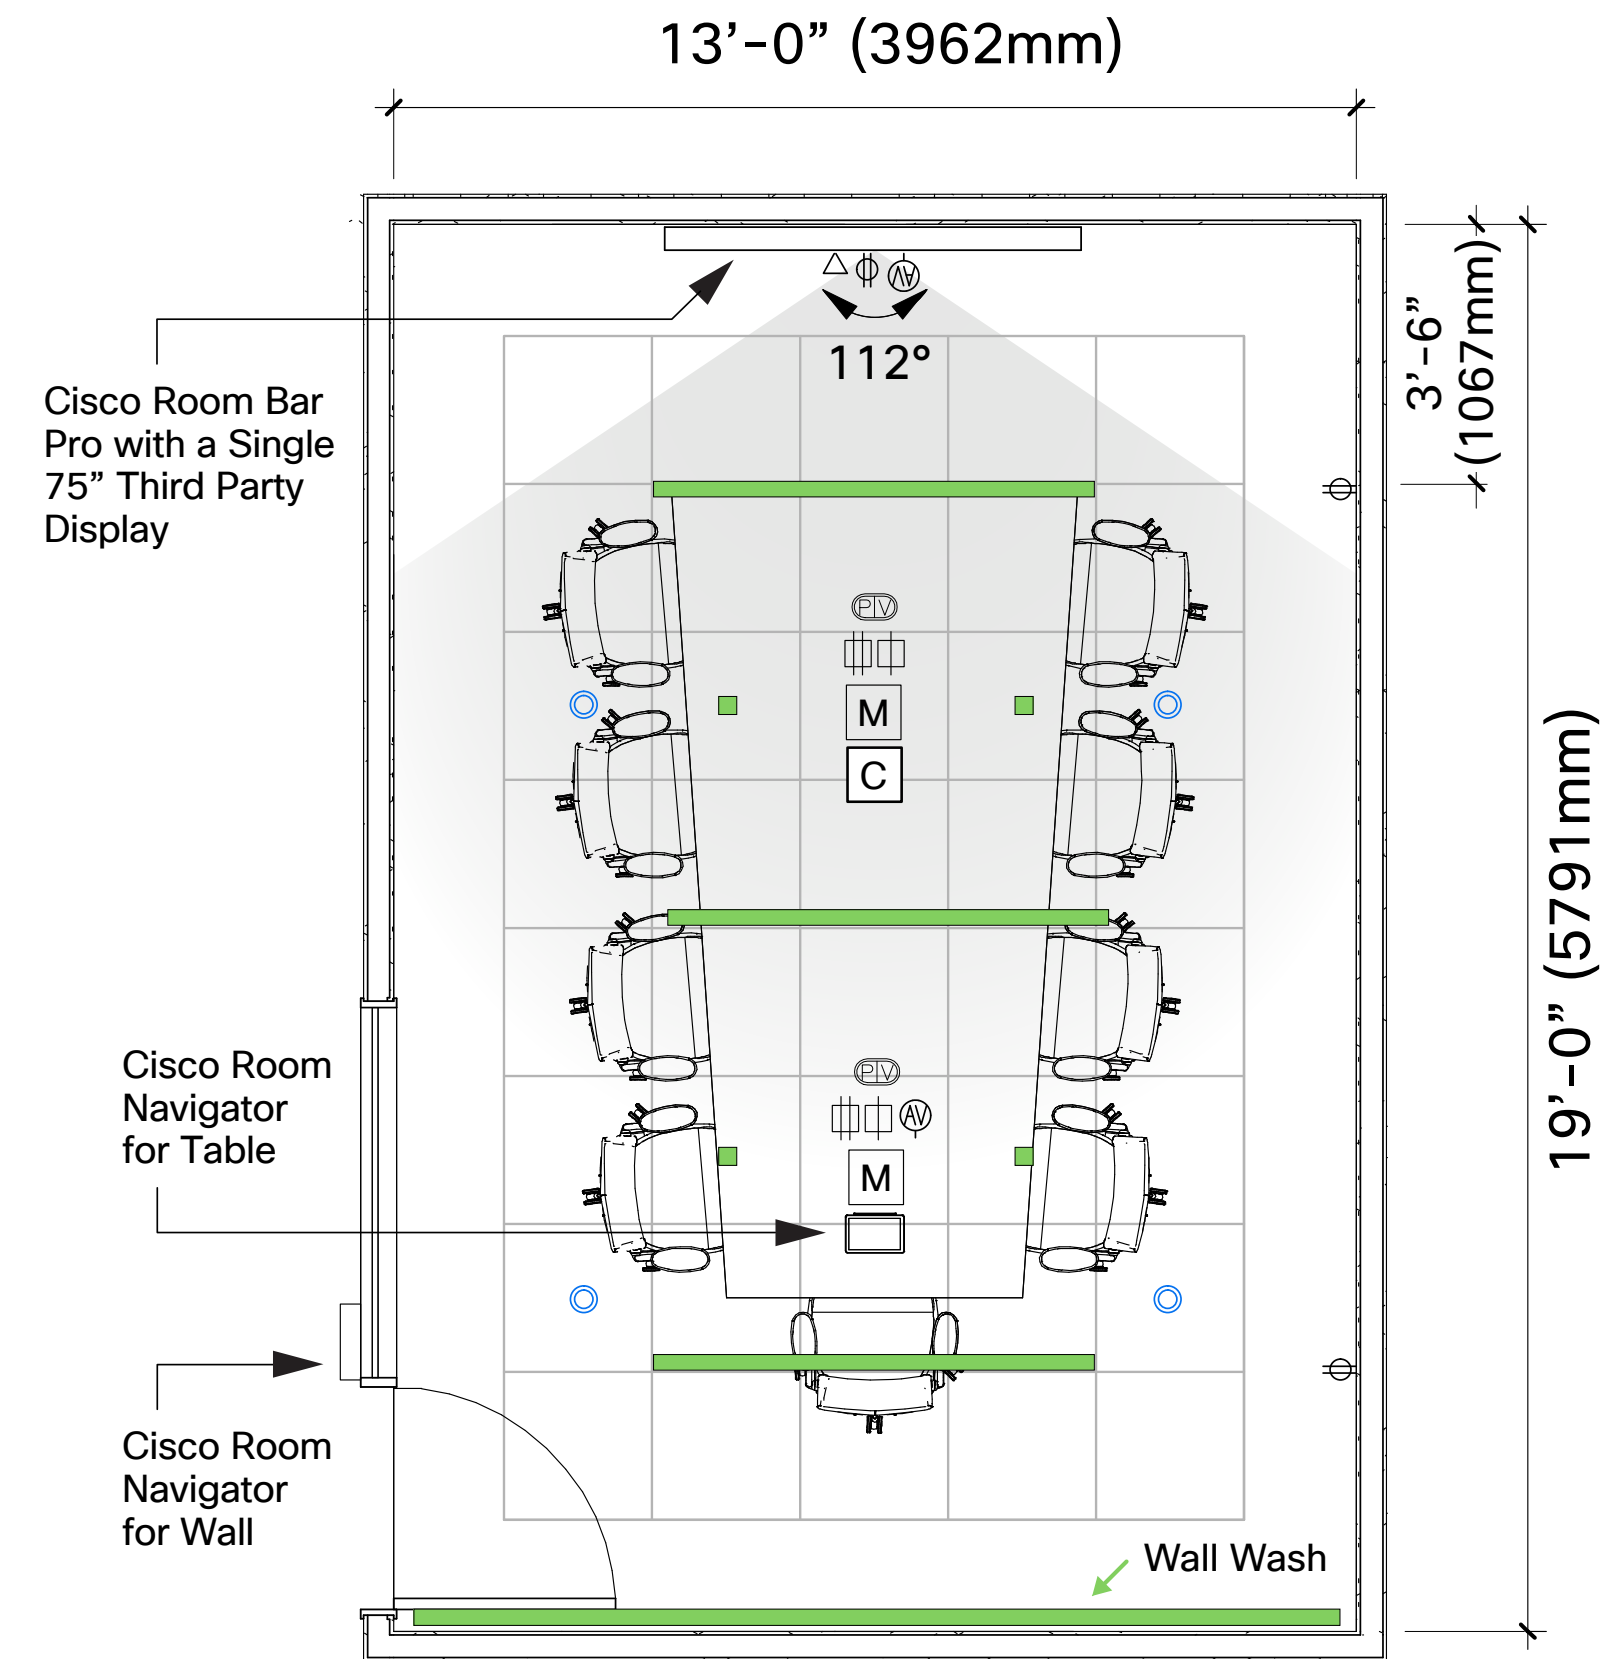

Credenza Option

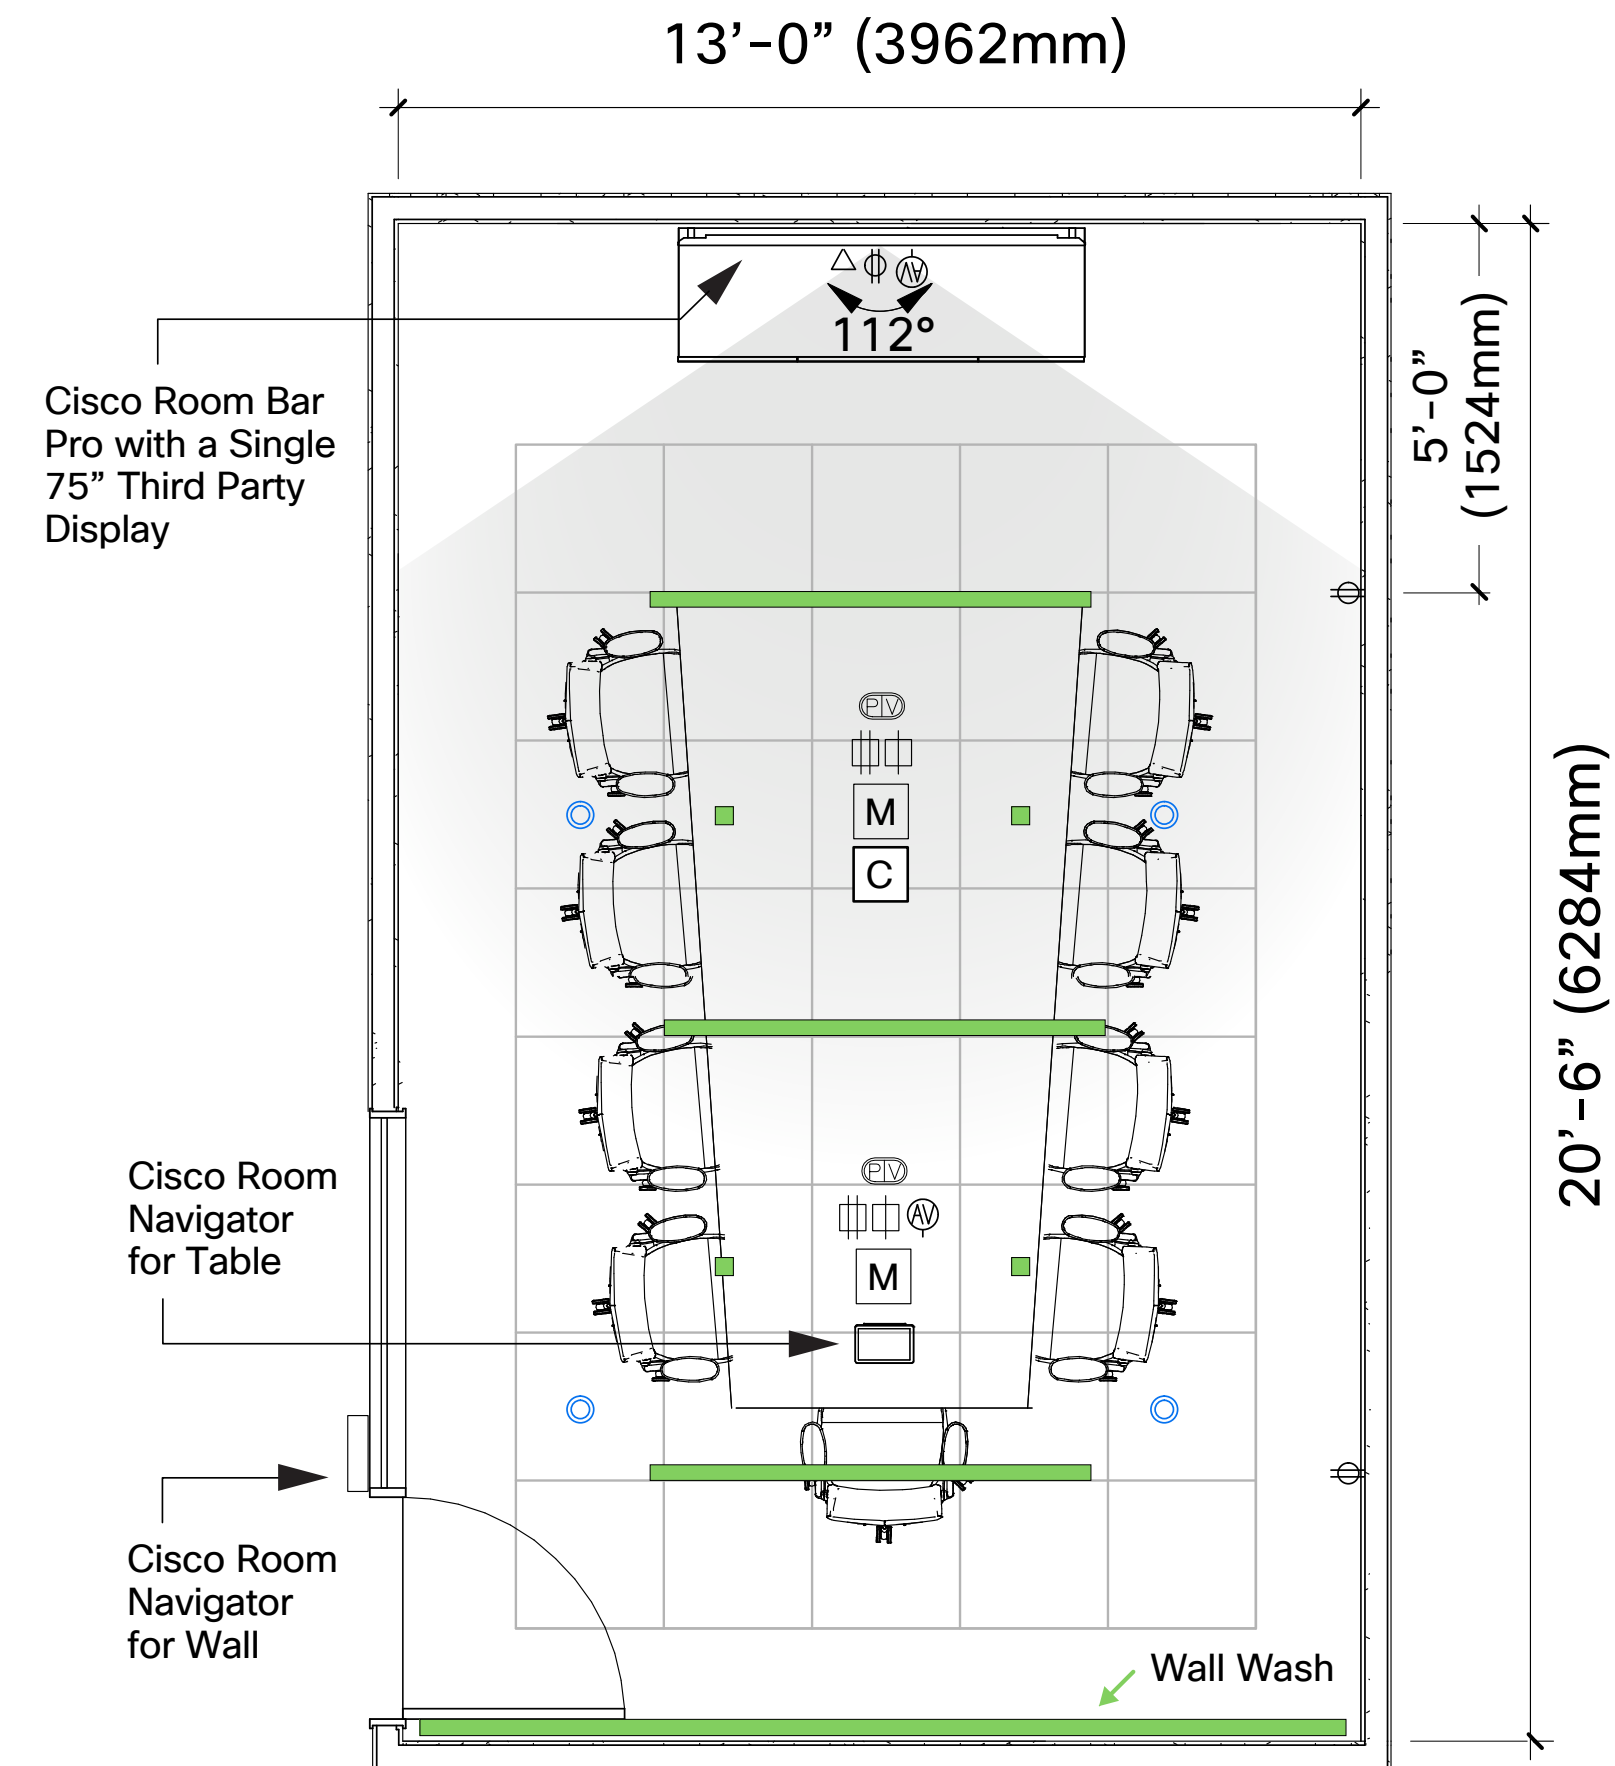

Graphics Symbols

- Acoustical Ceiling & Grid
- HVAC Diffusers (T.B.D.)
Shown as Example Only
- Light Fixtures
- Acoustical Wall
- Furniture Systems Version Devices**
 - Duplex Receptacle & Grid
 - Data Receptacle
- Power and Communication**
- WALL / CEILING / FLOOR VERSION DEVICES**
 - Cisco Ceiling Microphone Pro
 - Third Party Speakers (Optional)
 - Duplex Receptacle
 - Data Receptacle
 - Light Switch
 - AV Receptacle
 - Table Microphone
 - Combination Power & Voice / Data Infeed

Video Device Mounting Options

There are two mounting options for the video device in the Medium Collaboration Room - Single Display, directly on the wall or leveraging an A/V compatible credenza. Several factors will go into determining which option is best.

Wall Mount Option

Wall Mounted - Requires wall to be blocked and electrical and data to be elevated. Specific wall mount hardware must be determined based on the weight of the displays that are selected.



Credenza Option


A/V compatible credenza - Freestanding and fully integrated cabinets available from a number of specialized vendors eliminate the requirement for the wall to be blocked and electrical moved. Perfect for new and retrofit installations, allowing for quick and efficient installation.




Note: Actual credenza size to be determined based on width of display.

Room Elevations - Credenza Option


Construction Elevation

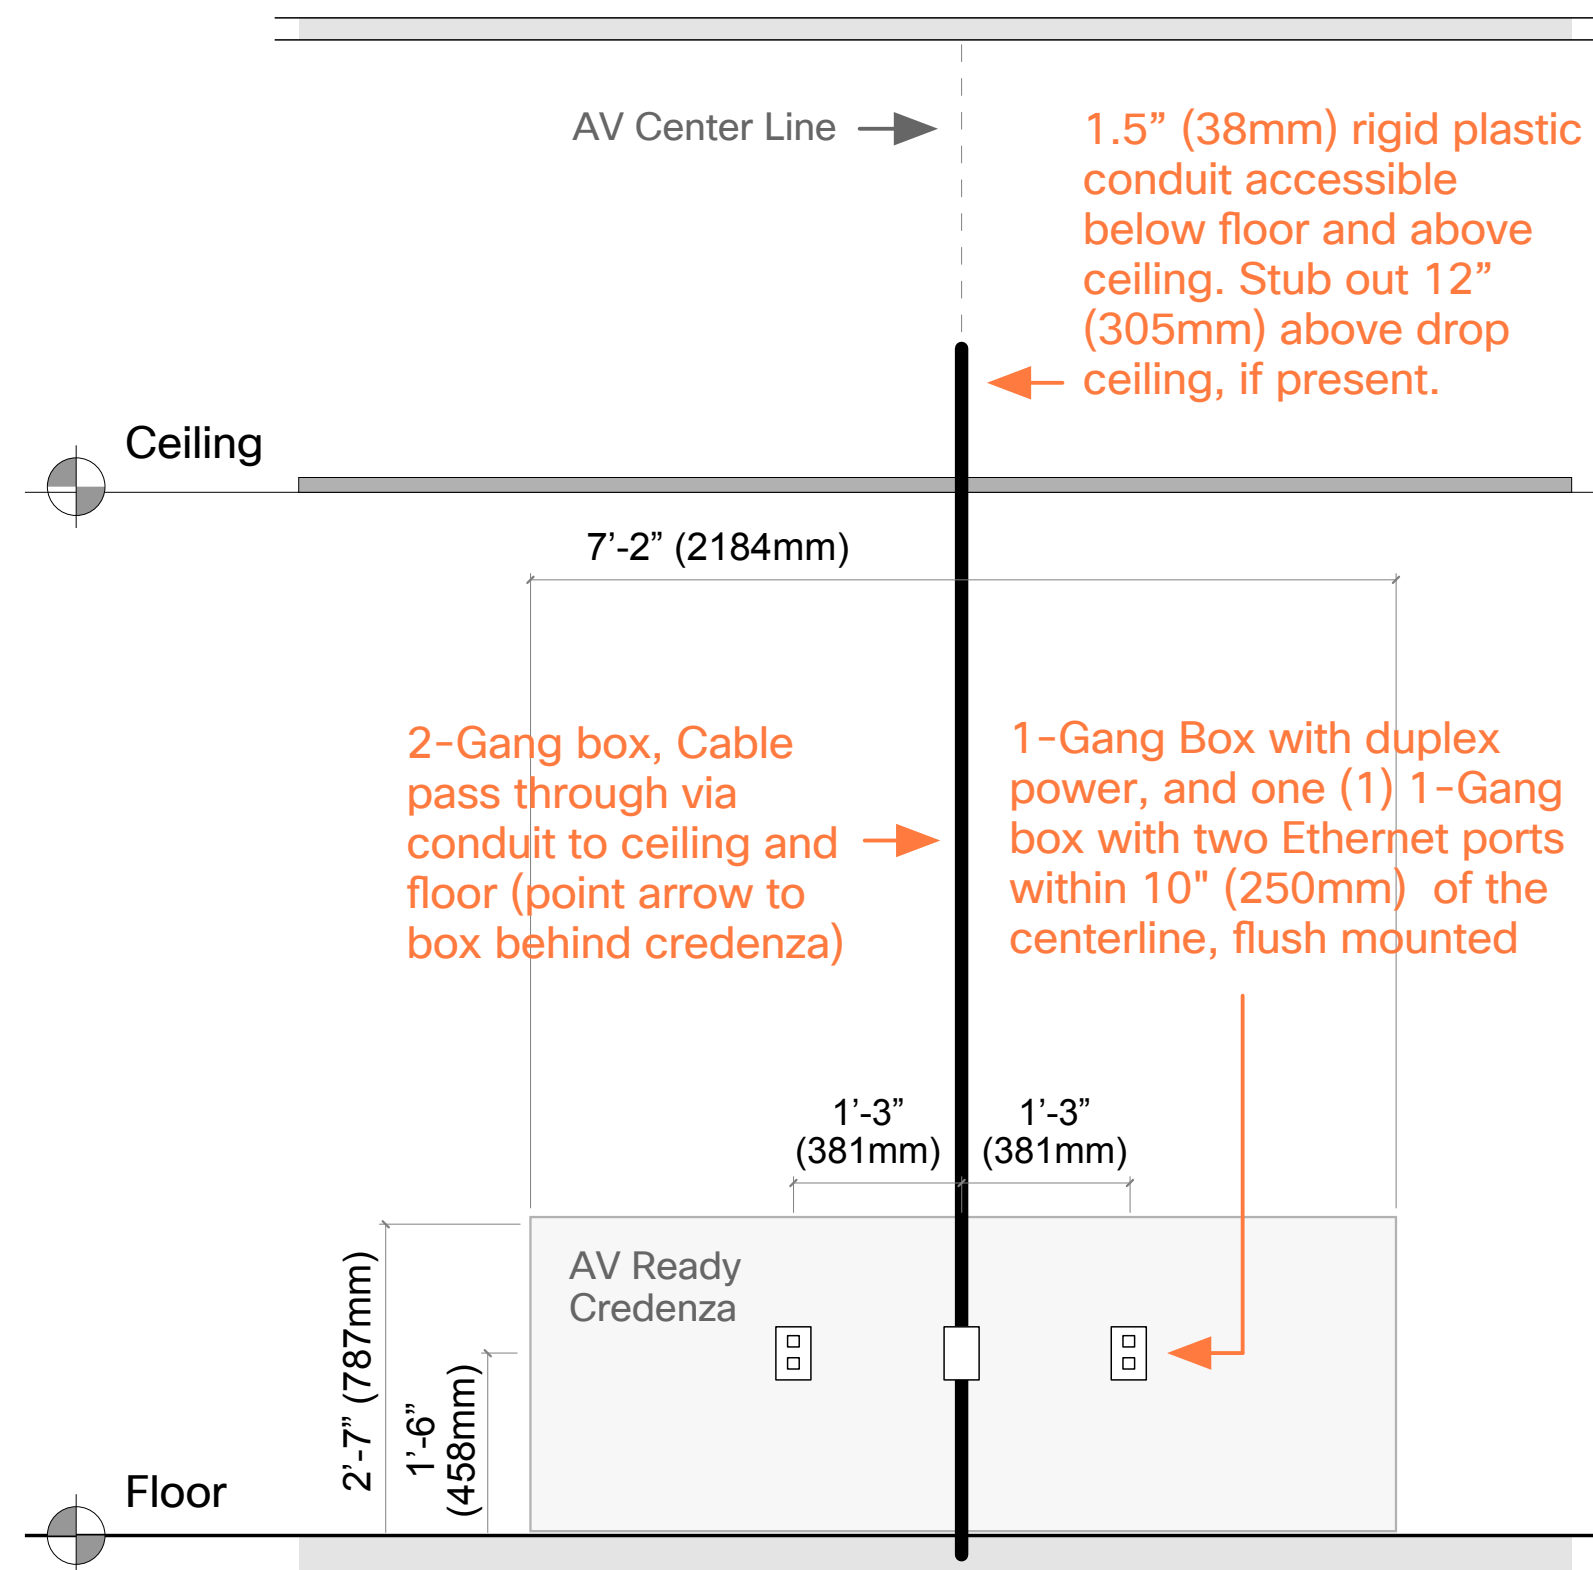

Finished Elevation

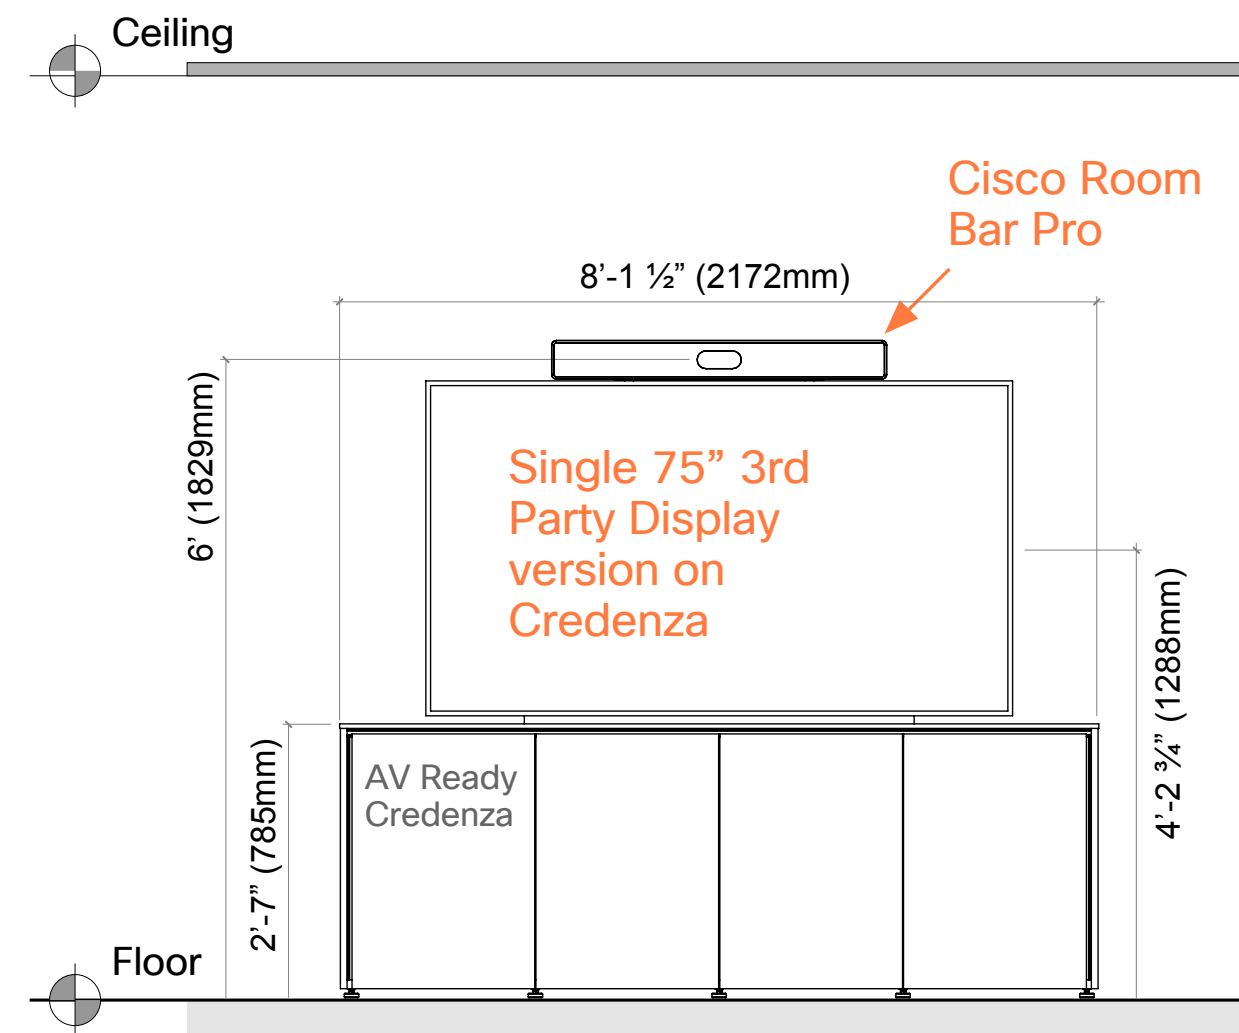

Side Elevation

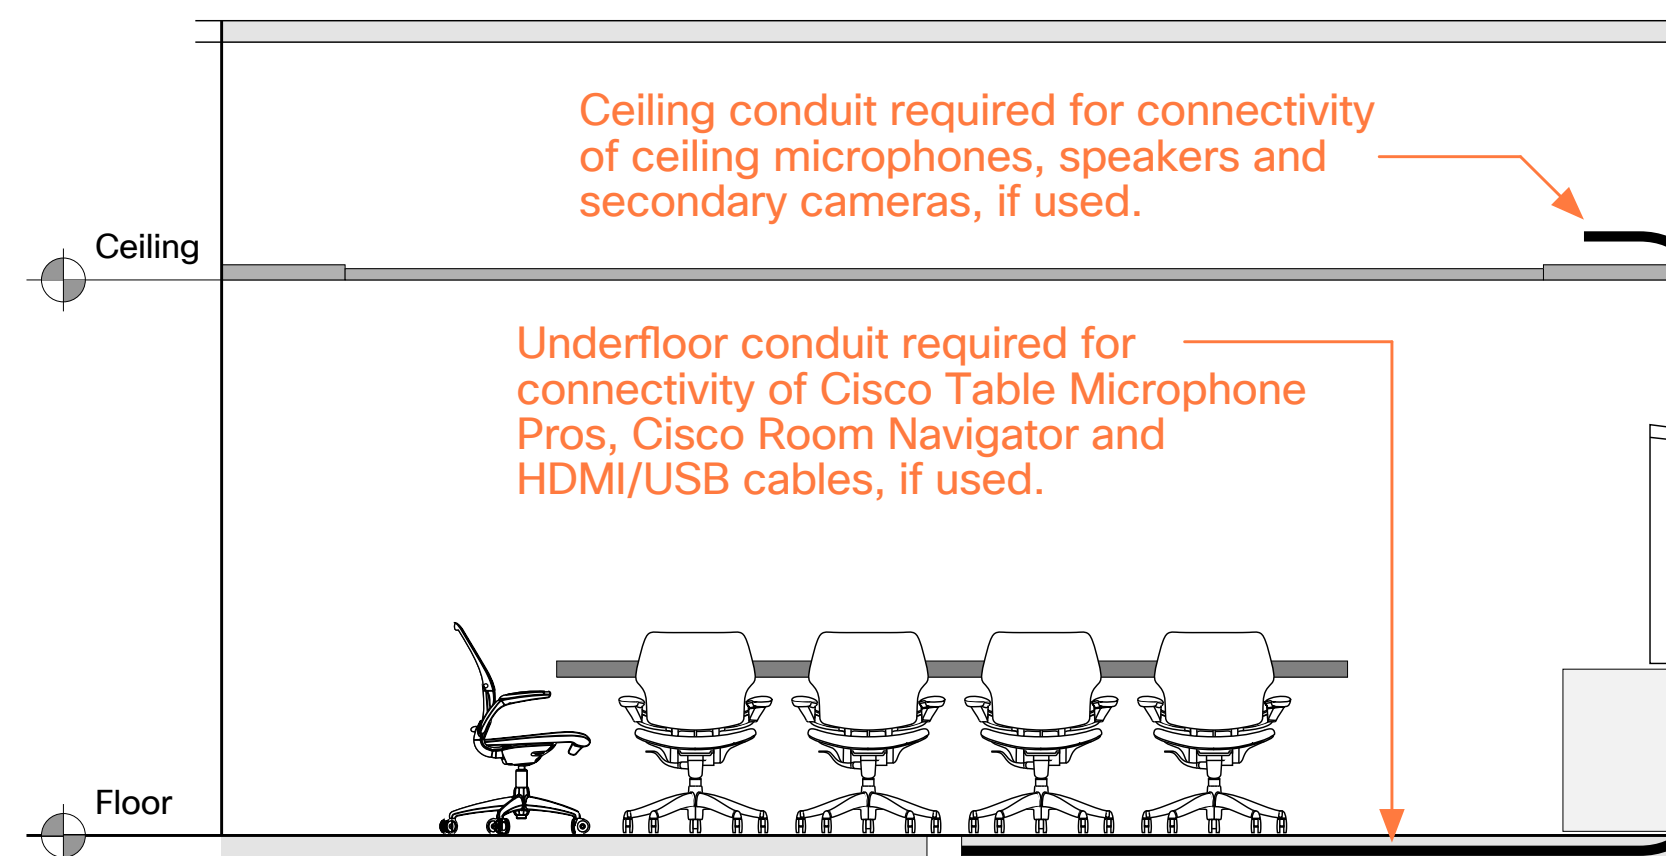


Note: Configuration shown mounts video device and displays directly on an AV ready credenza.

Reflective Ceiling Plan & Acoustical Treatment


● We recommend glare-free luminary with a beam angle of 90° or wider as it serves as both key and fill light, with a color temperature ~4000K and color rendering index (CRI) of 85 or better.

● Two walls of acoustical wall treatment is optimal, preferred location is wall opposite device and then adjoining, away from entry location.

Wall Mount Option

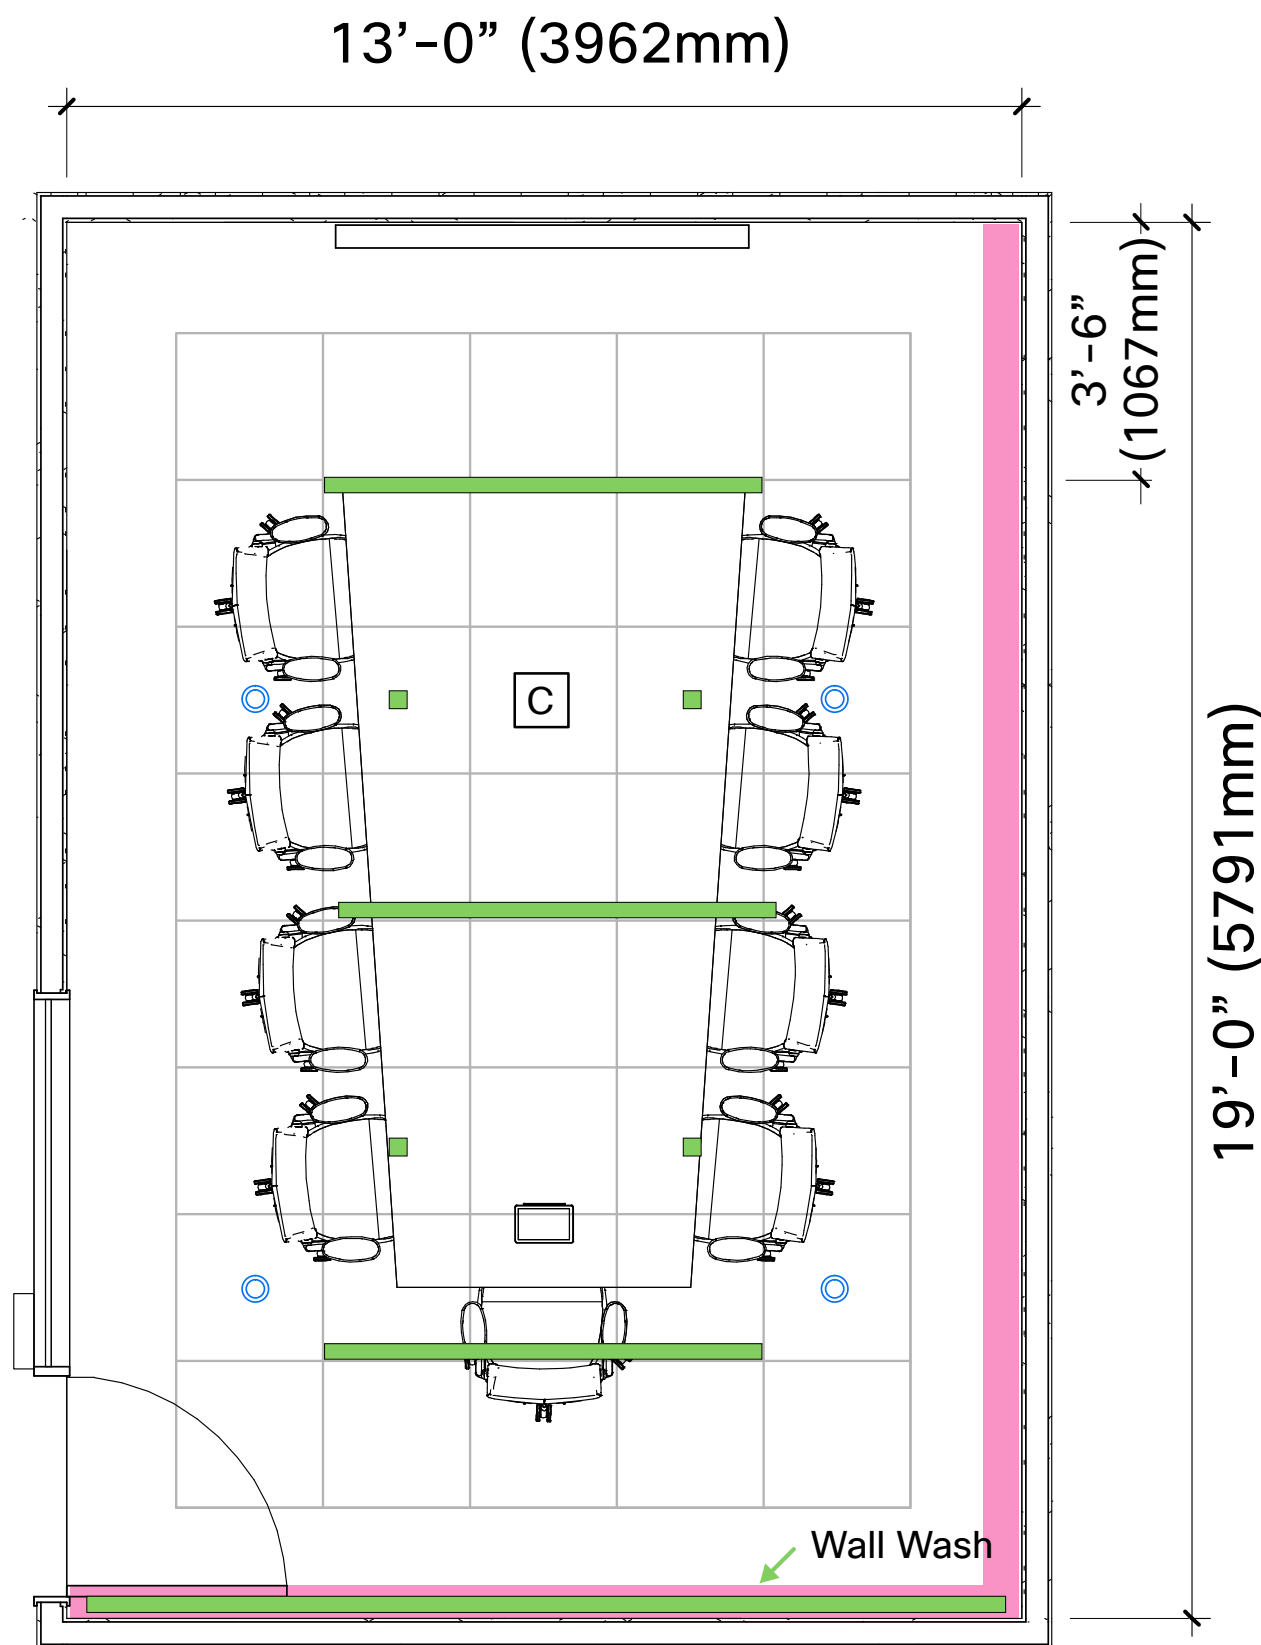

Credenza Option

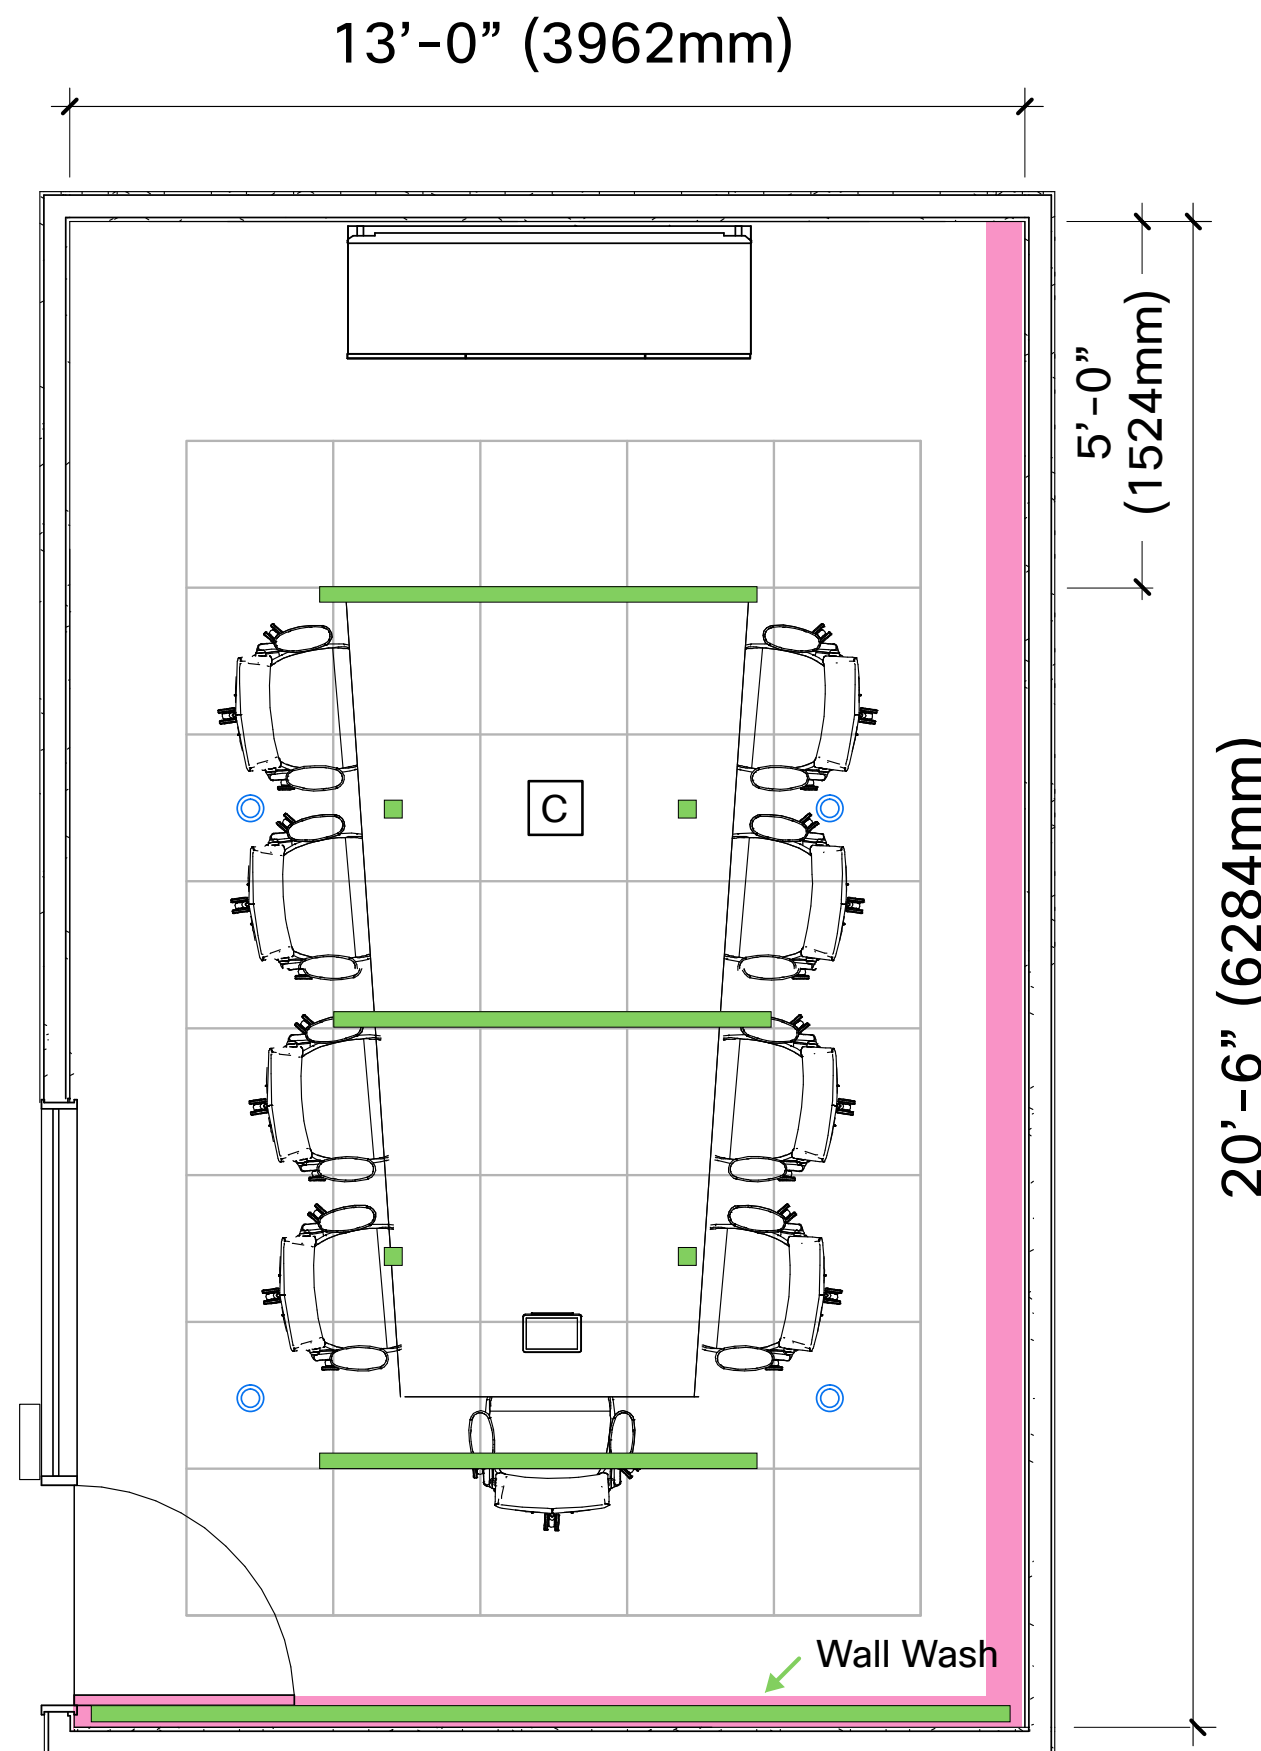

Graphics Symbols

- Acoustical Ceiling & Grid
- HVAC Diffusers (T.B.D.)
Shown as Example Only
- Light Fixtures
- Acoustical Wall
- Furniture Systems Version Devices**
- Duplex Receptacle & Grid
- Data Receptacle
- Power and Communication**
- WALL / CEILING / FLOOR VERSION DEVICES**
- Cisco Ceiling Microphone Pro
- Third Party Speakers (Optional)
- Duplex Receptacle
- Data Receptacle
- Light Switch
- AV Receptacle
- Table Microphone
- Combination Power & Voice / Data Infeed

Option 1: Cisco Room Bar Pro with Single 75" Display for Narrow Rooms Shown



Power & Data

General Specifications

Power and data requirements need to be verified for each project. Provide video device power and data even if the project plan does not include it on day one. Based on the design of this space, core drills and floor boxes will not be required.

Power in Tabletop

User power should be surface mounted in the tabletop. If pop-ups or table wells are used, it is important to verify that they can accommodate all laptop power supplies. Provide shared power – 1 power port for every two seats.

Power & Data

Provide two (2) duplex power outlets and one data receptacle with two ethernet ports on the wall behind the video device. The exact location of these will depend on the mounting option selected. Suggested locations can be found in the elevations section of this document, but the exact location should be verified with the mount manufacturer or the A/V partner doing the installation. Additional power and data ports may also be required under the table for a PoE-compatible switch, based on how the Cisco Room Navigator and/or Cisco Microphone Pros are deployed.

Exploded IT Diagram



Cisco Room Navigator for Table (required)

The preferred method of connectivity for the Cisco Room Navigator for Table is directly to the designated PoE port on the back of the Cisco Bar Pro via an Ethernet cable. Alternatively, the Room Navigator can also be connected to a PoE compatible switch mounted under the table, which then connects directly back to the designated PoE port on the Room Bar Pro, or directly to the network switch via a Ethernet jack in the floor (hidden by the table leg).

Cisco Room Navigator for Wall

It is recommended to run the cable inside the wall or through the door frame directly back to a network switch.

Cisco Microphones

Although not technically required for a room of this size, either a single Cisco Ceiling Microphone Pro or two (2) Cisco Table Microphone Pros are highly recommended. The Room Bar Pro has two (2) general use PoE ports that can be used for either the Cisco Ceiling Microphone or Cisco Table Microphone Pros. If more than two (2) Cisco Table Microphone Pros are needed then an under-table mounted PoE compatible Switch will be required.

Third-party Speakers

Although not typically required for this space, they can be used if local conditions warrant. (Requires conduit behind device to ceiling.)

Table Top Charging


USB-C charging and convenience outlets on table top. Ensure the size of the trough and layout can accommodate a variety of laptop power supplies.

Wall Blocking


Required when the device is wall-mounted. The size and composition of blocking materials should be determined based on the overall weight of the solution deployed.

Core Drilling

Core Drill-Preferred method for providing connectivity between the table and the Cisco Room Bar Pro for the Cisco Room Navigator for Table, Cisco Table Microphones and/or HDMI/USB-C cables. If core drilling is not an option, a floor cable cover or wire concealer can be used.

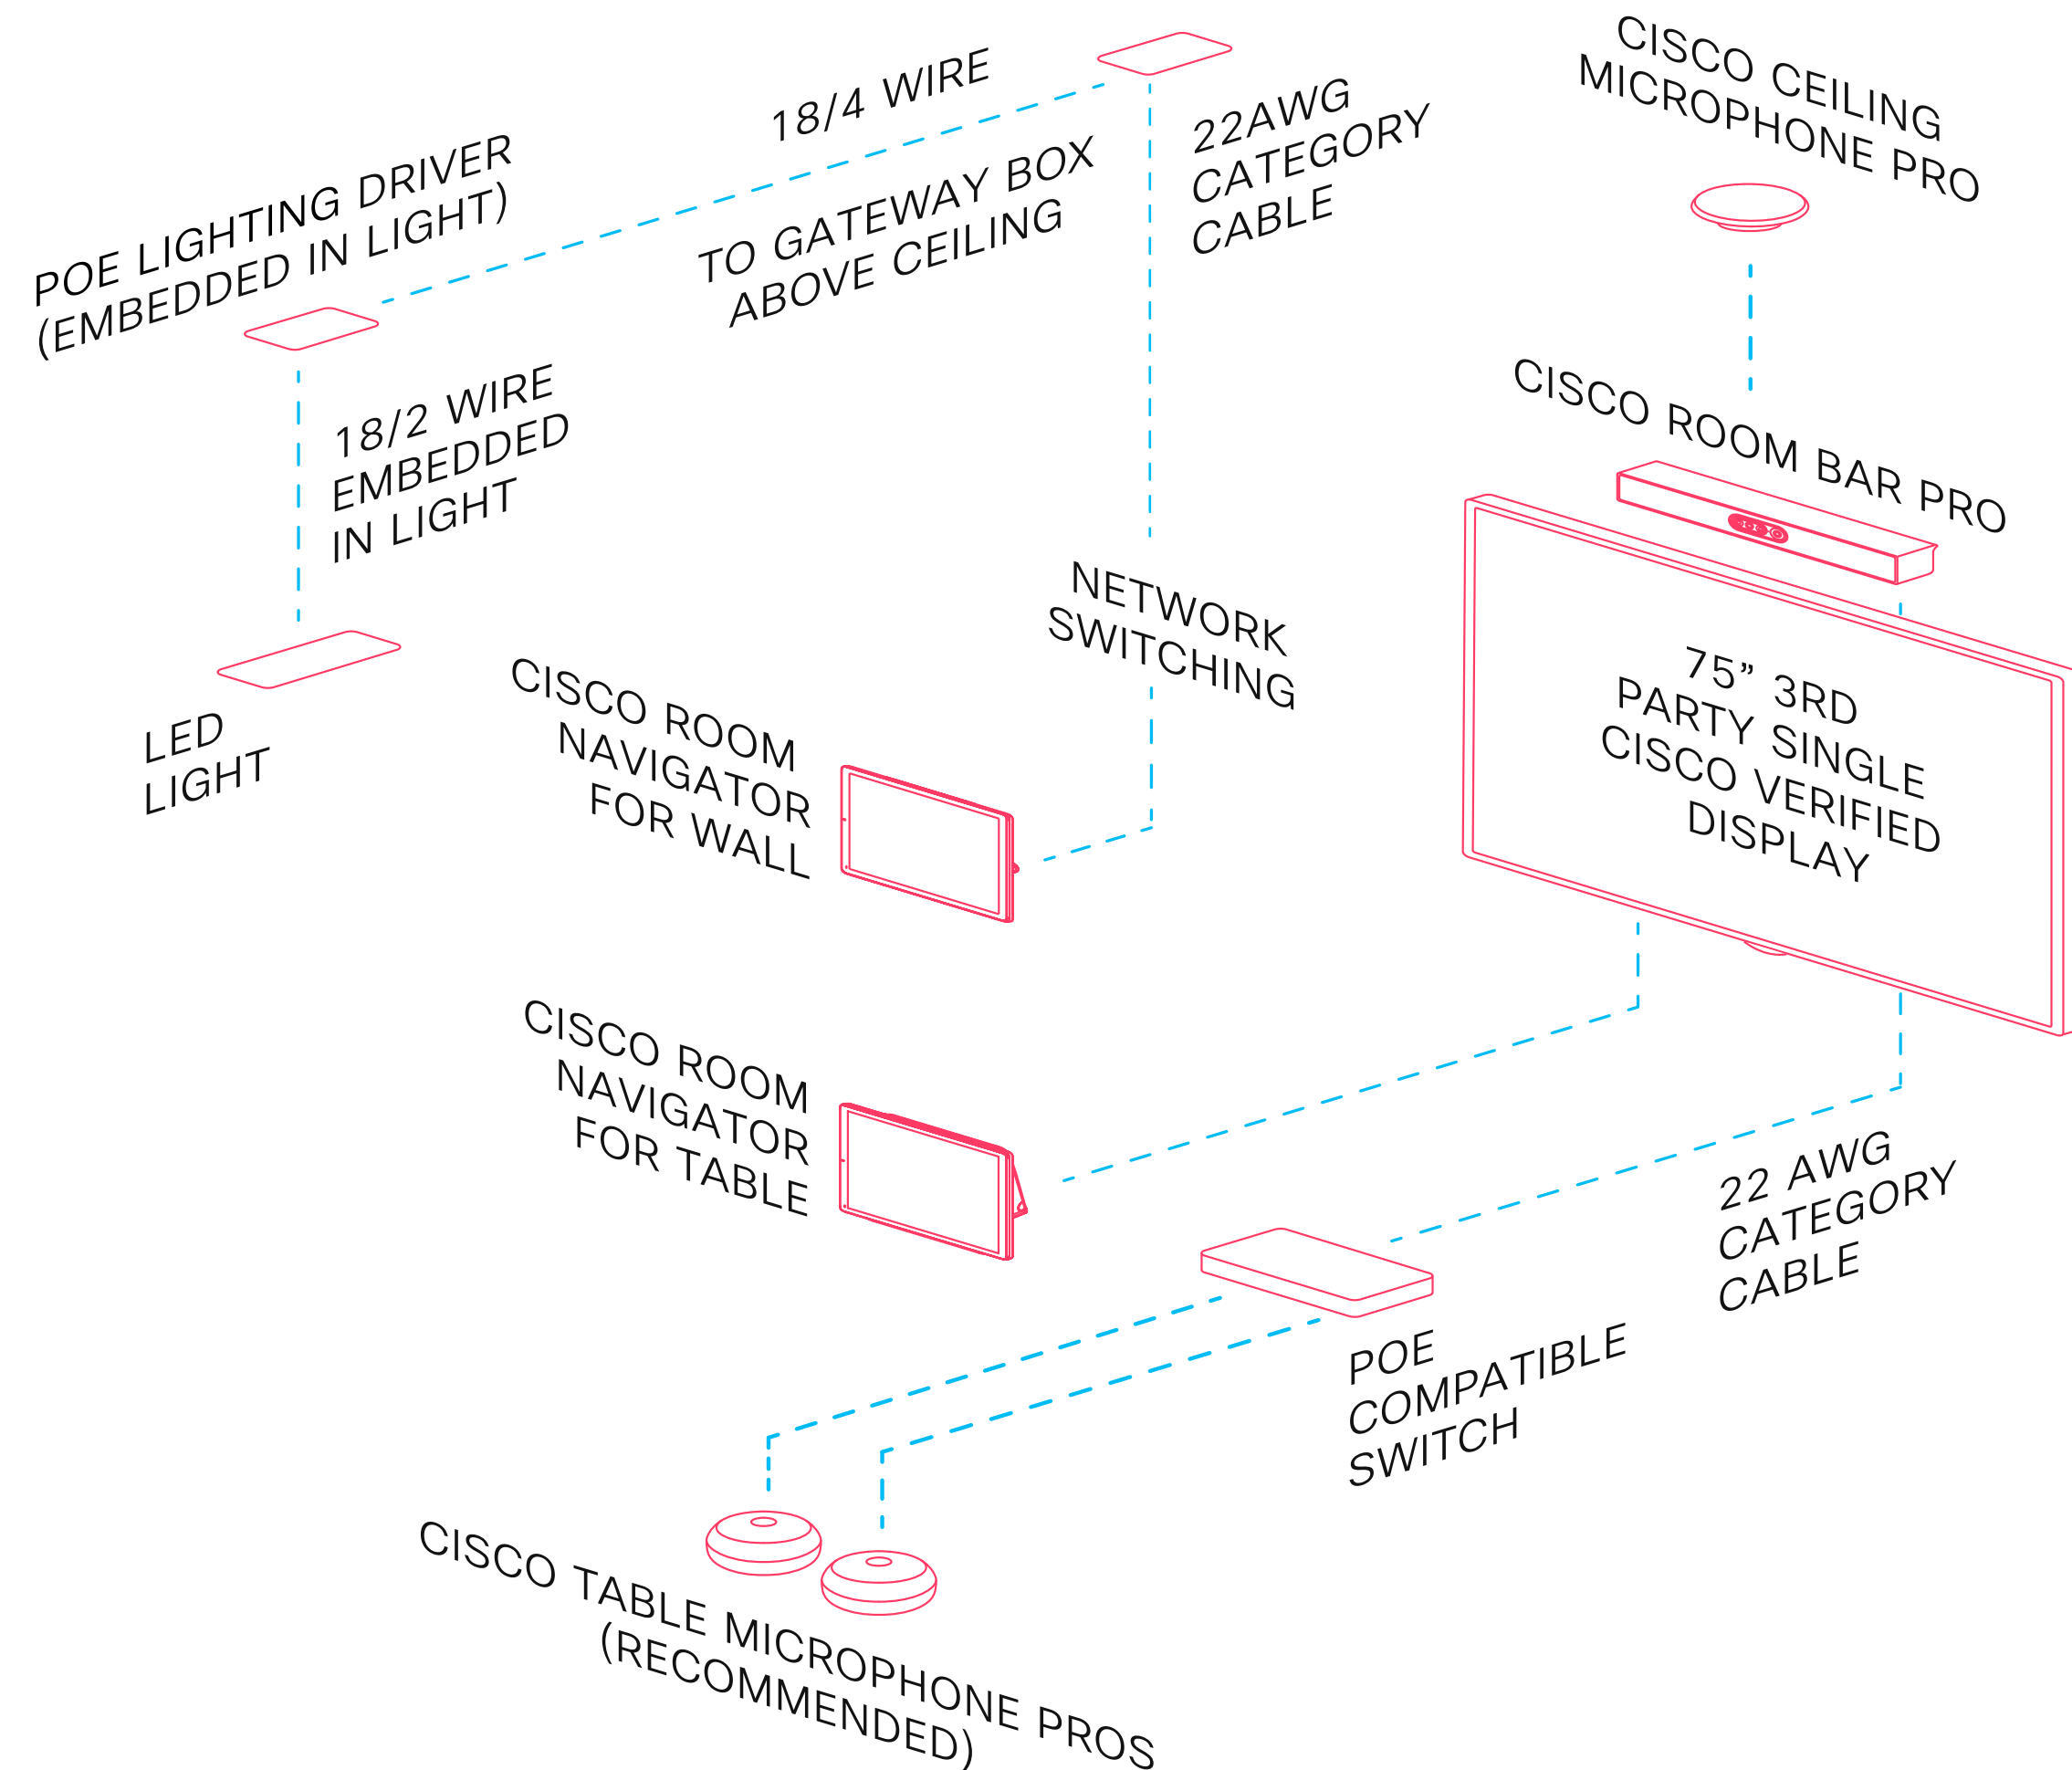

Connectivity View

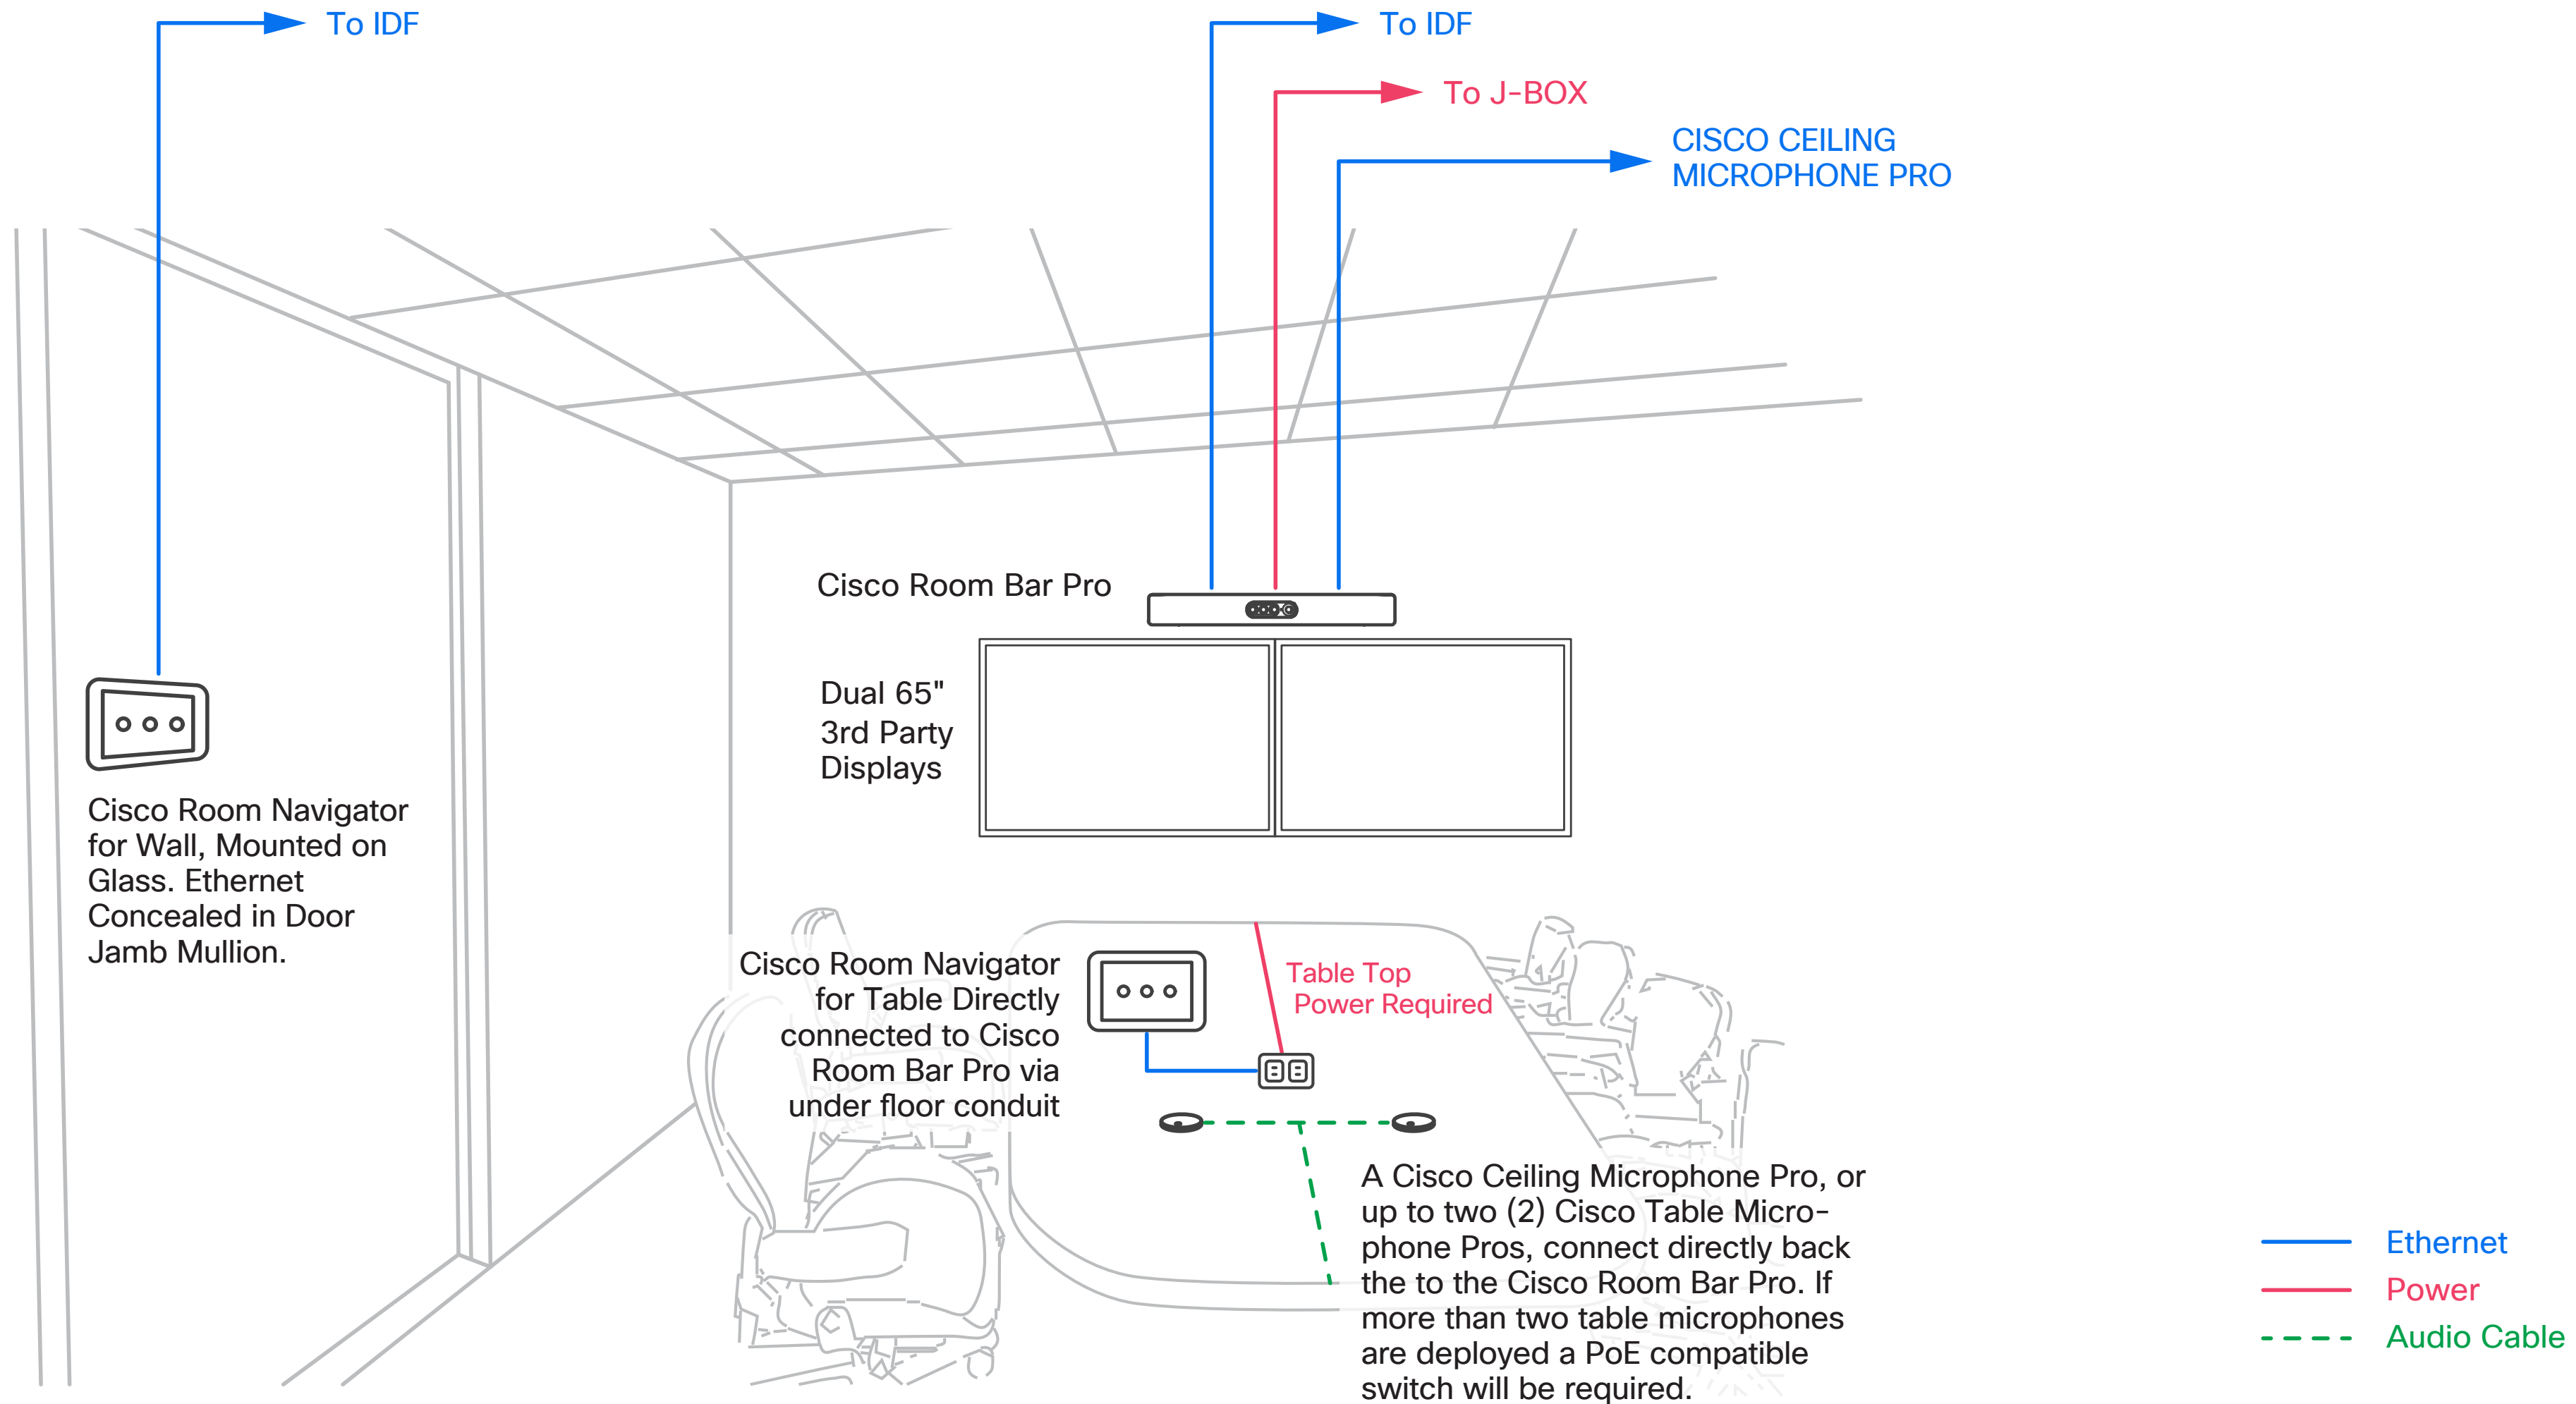

IT/OT Bill of Material

Cisco Products

- **CS-KIT-EQ-K9** Cisco Room Kit EQ
 - **CS-MIC-TABLE-J** Tabletop Mic (add qty 2 as option)
 - **CS-MIC-CLGPRO** Cisco Ceiling Microphone Pro (Qty 1) - Optional
 - **CS-T10-TS-G-K9** Cisco Room Navigator for table
- **CS-T10-WM-K9=** Cisco Room Navigator for Wall

Non-Cisco peripherals

- Single 75" Video Displays

IOT Considerations

- IAQ coming from the Cisco Room Navigator, No additional IoT IAQ
- Occupancy sensing is coming from the Cisco Endpoints
- Suggested lighting specifications: 220LPW raw, 140LPW delivered
- Each Medium Collaboration room POE lights being power by 4 ports on the ceiling
- Traditional DC Wall Switch
- Ensure device is not connected to ASHRAE 90.1 outlet

External microphones and speakers


- Mic and speakers are embedded in the Cisco Endpoints, no additional mic or speakers required

Option 3: Cisco Room Kit EQX with Dual Displays




Room Layout

Layout Using Wall Mount, Wall Stand, or A/V Credenza

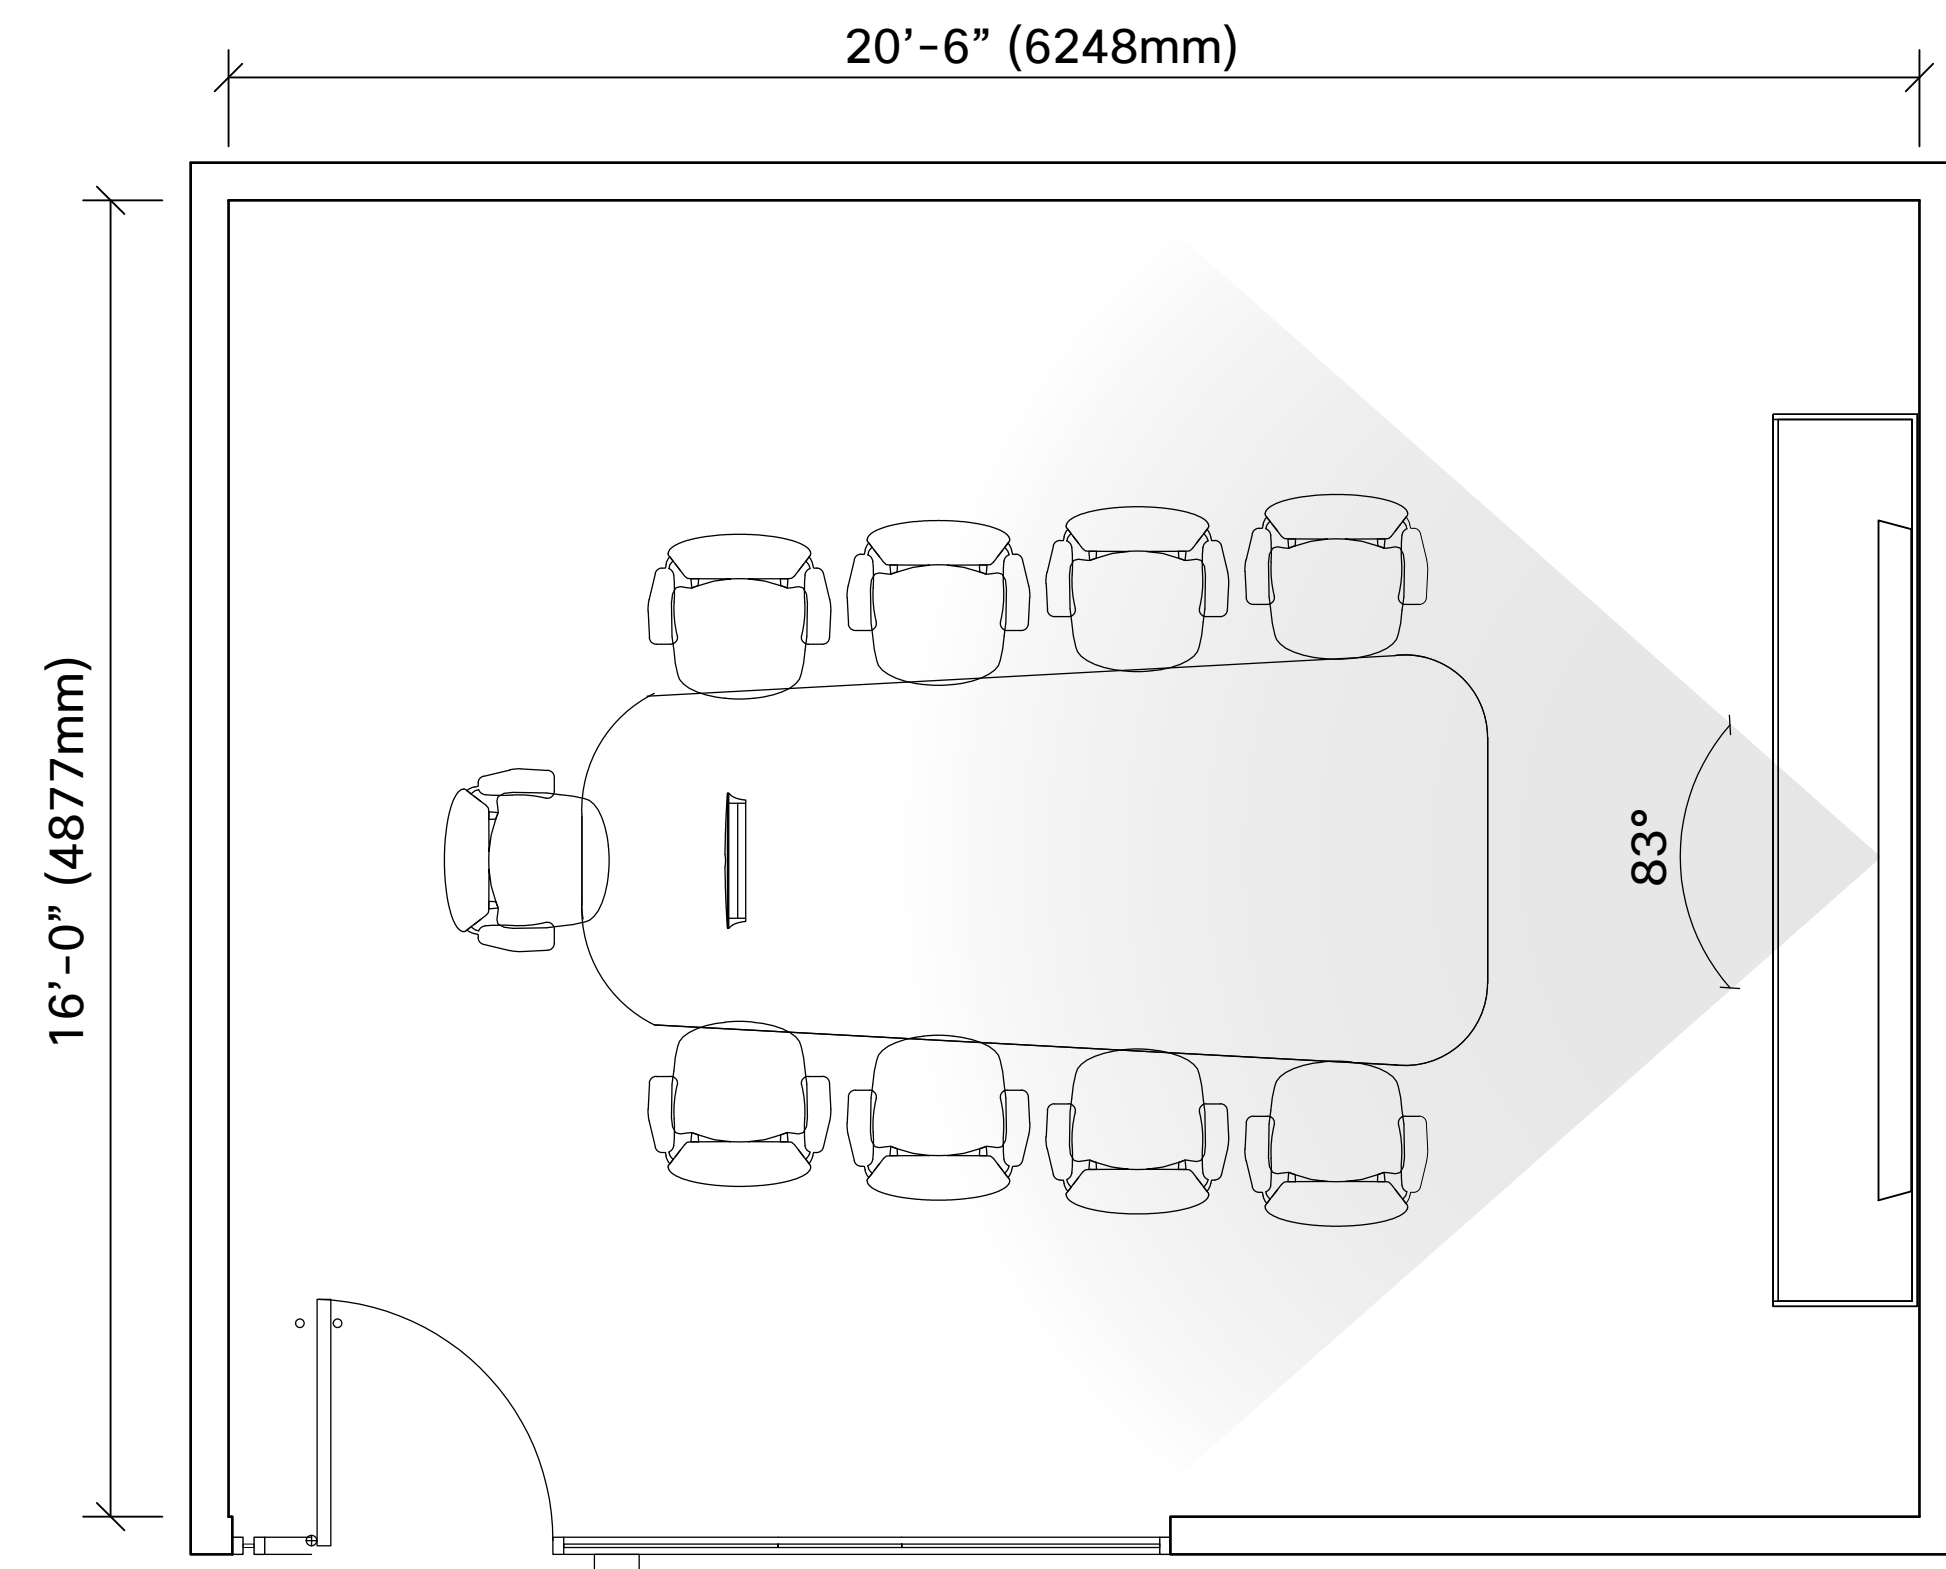

Layout Using the Cisco EQX Floor Stand

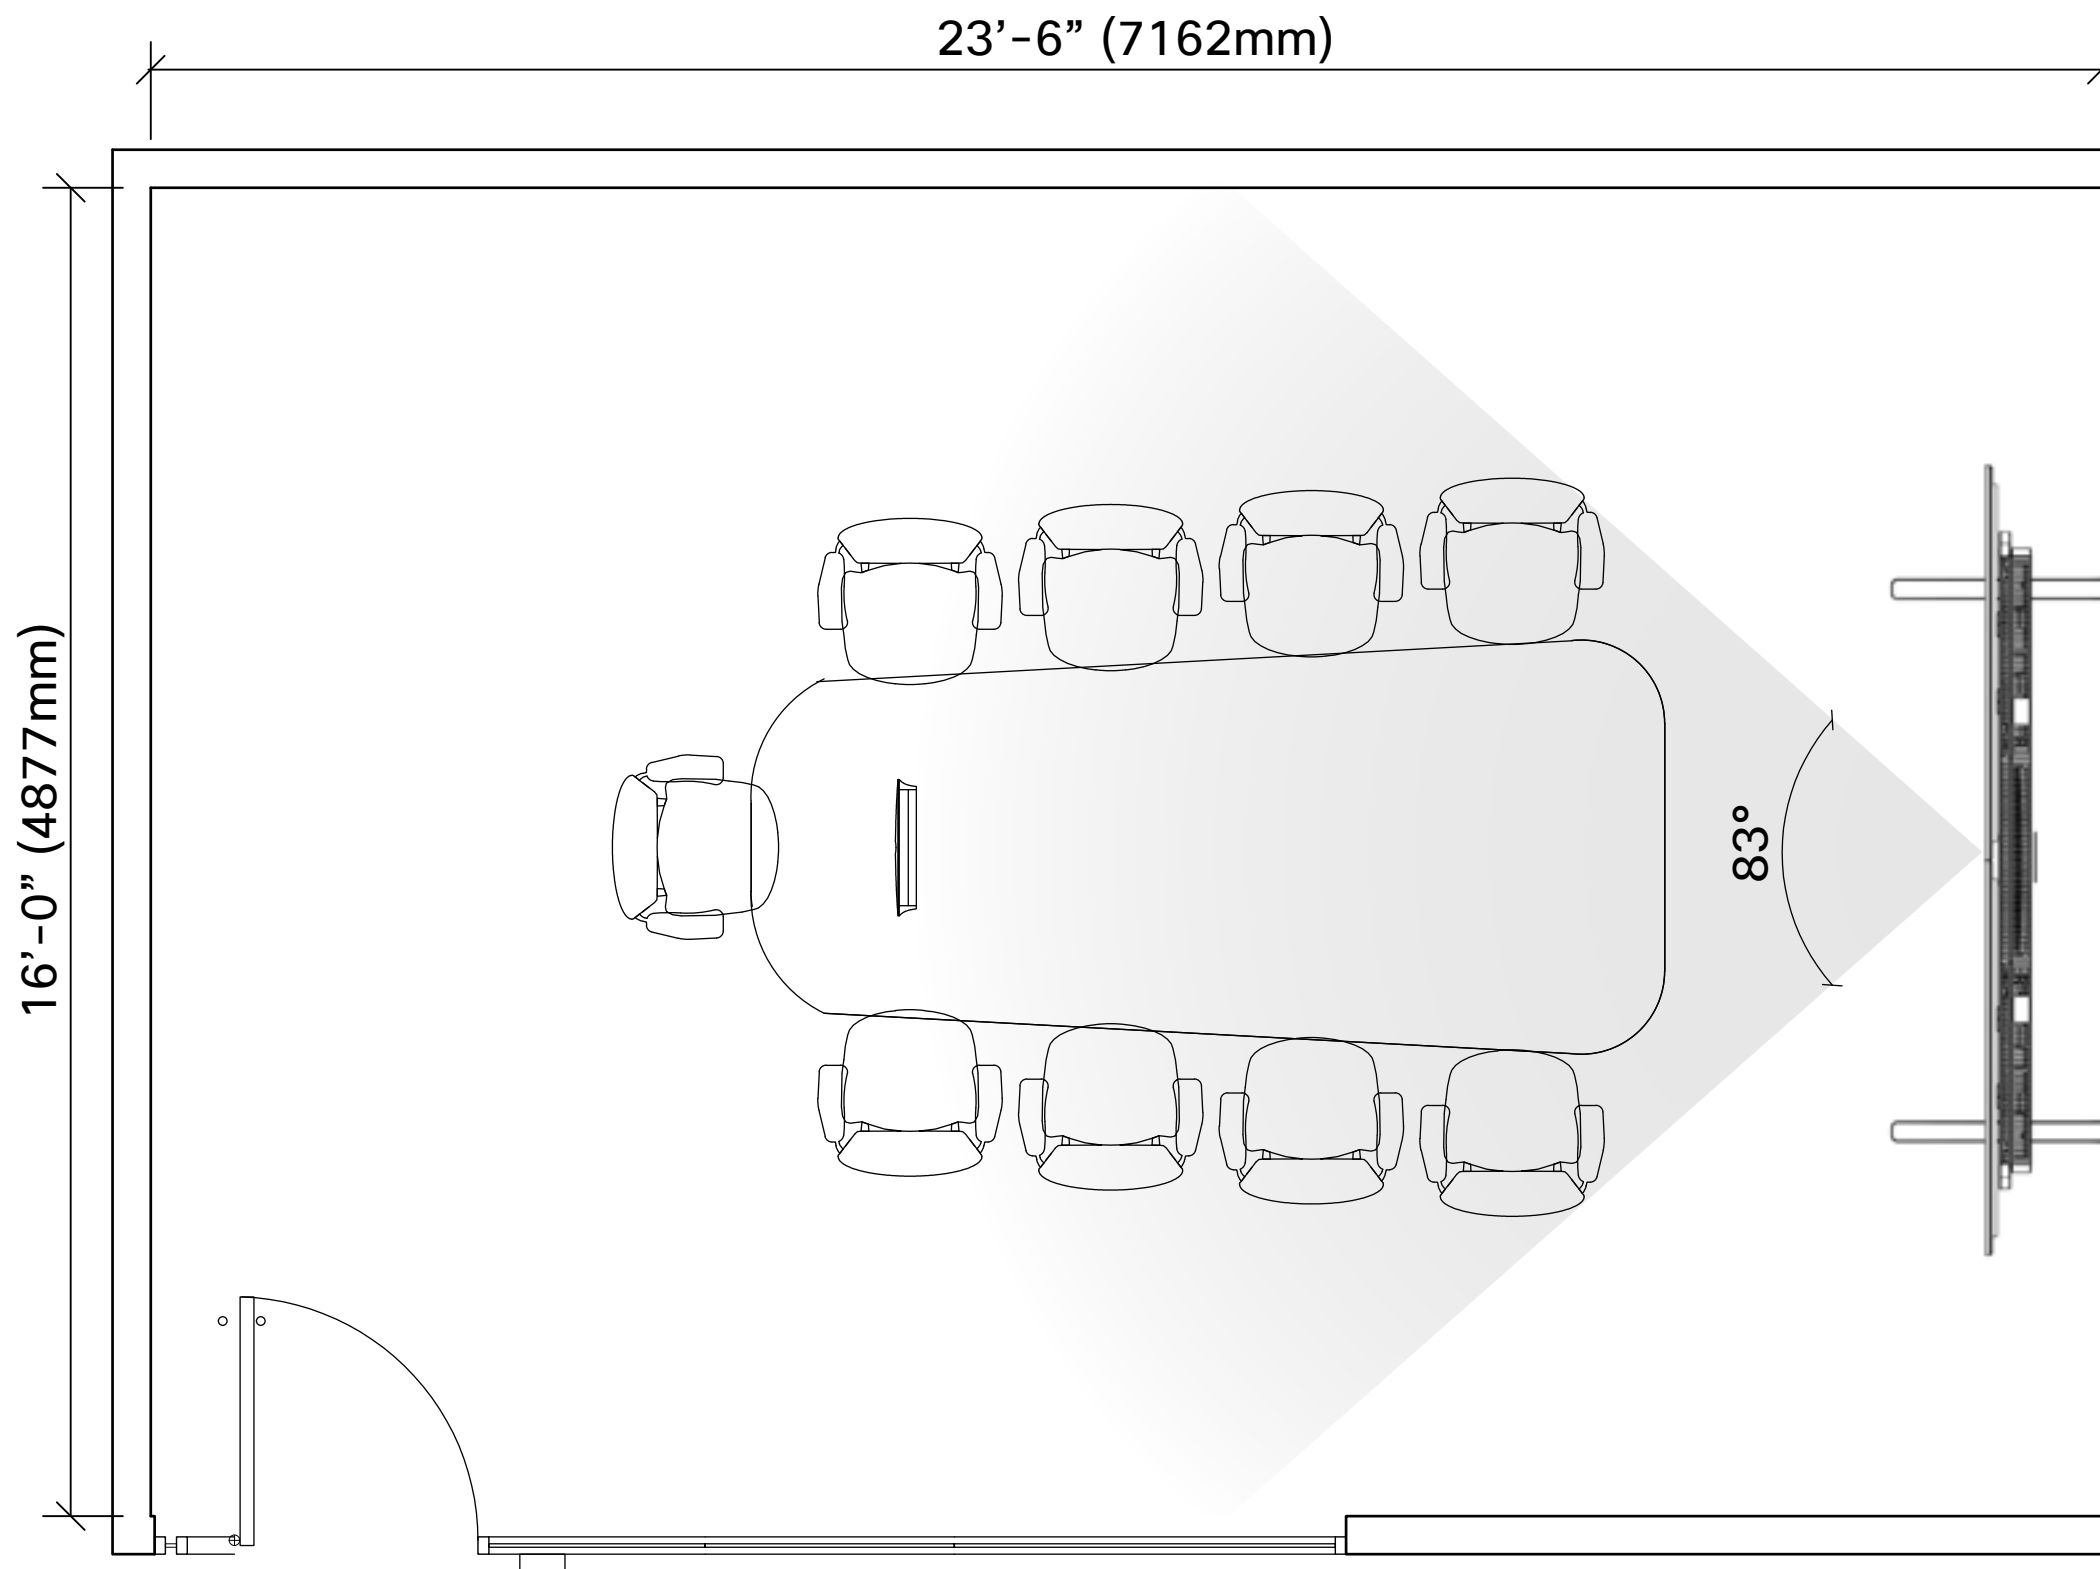


i Note: Room dimensions shown are the minimal size, based on the technology and furniture options shown.

i Note: Room dimensions shown are the minimal size, based on the technology and furniture options shown. The length of this space is slightly larger than what is shown for the Wall Mount, Credenza, and Wall Stand options due to the width of the legs on the Cisco EQX Floor Stand.


Composite Plan

Layout Using Wall Mount, Wall Stand, or A/V Credenza

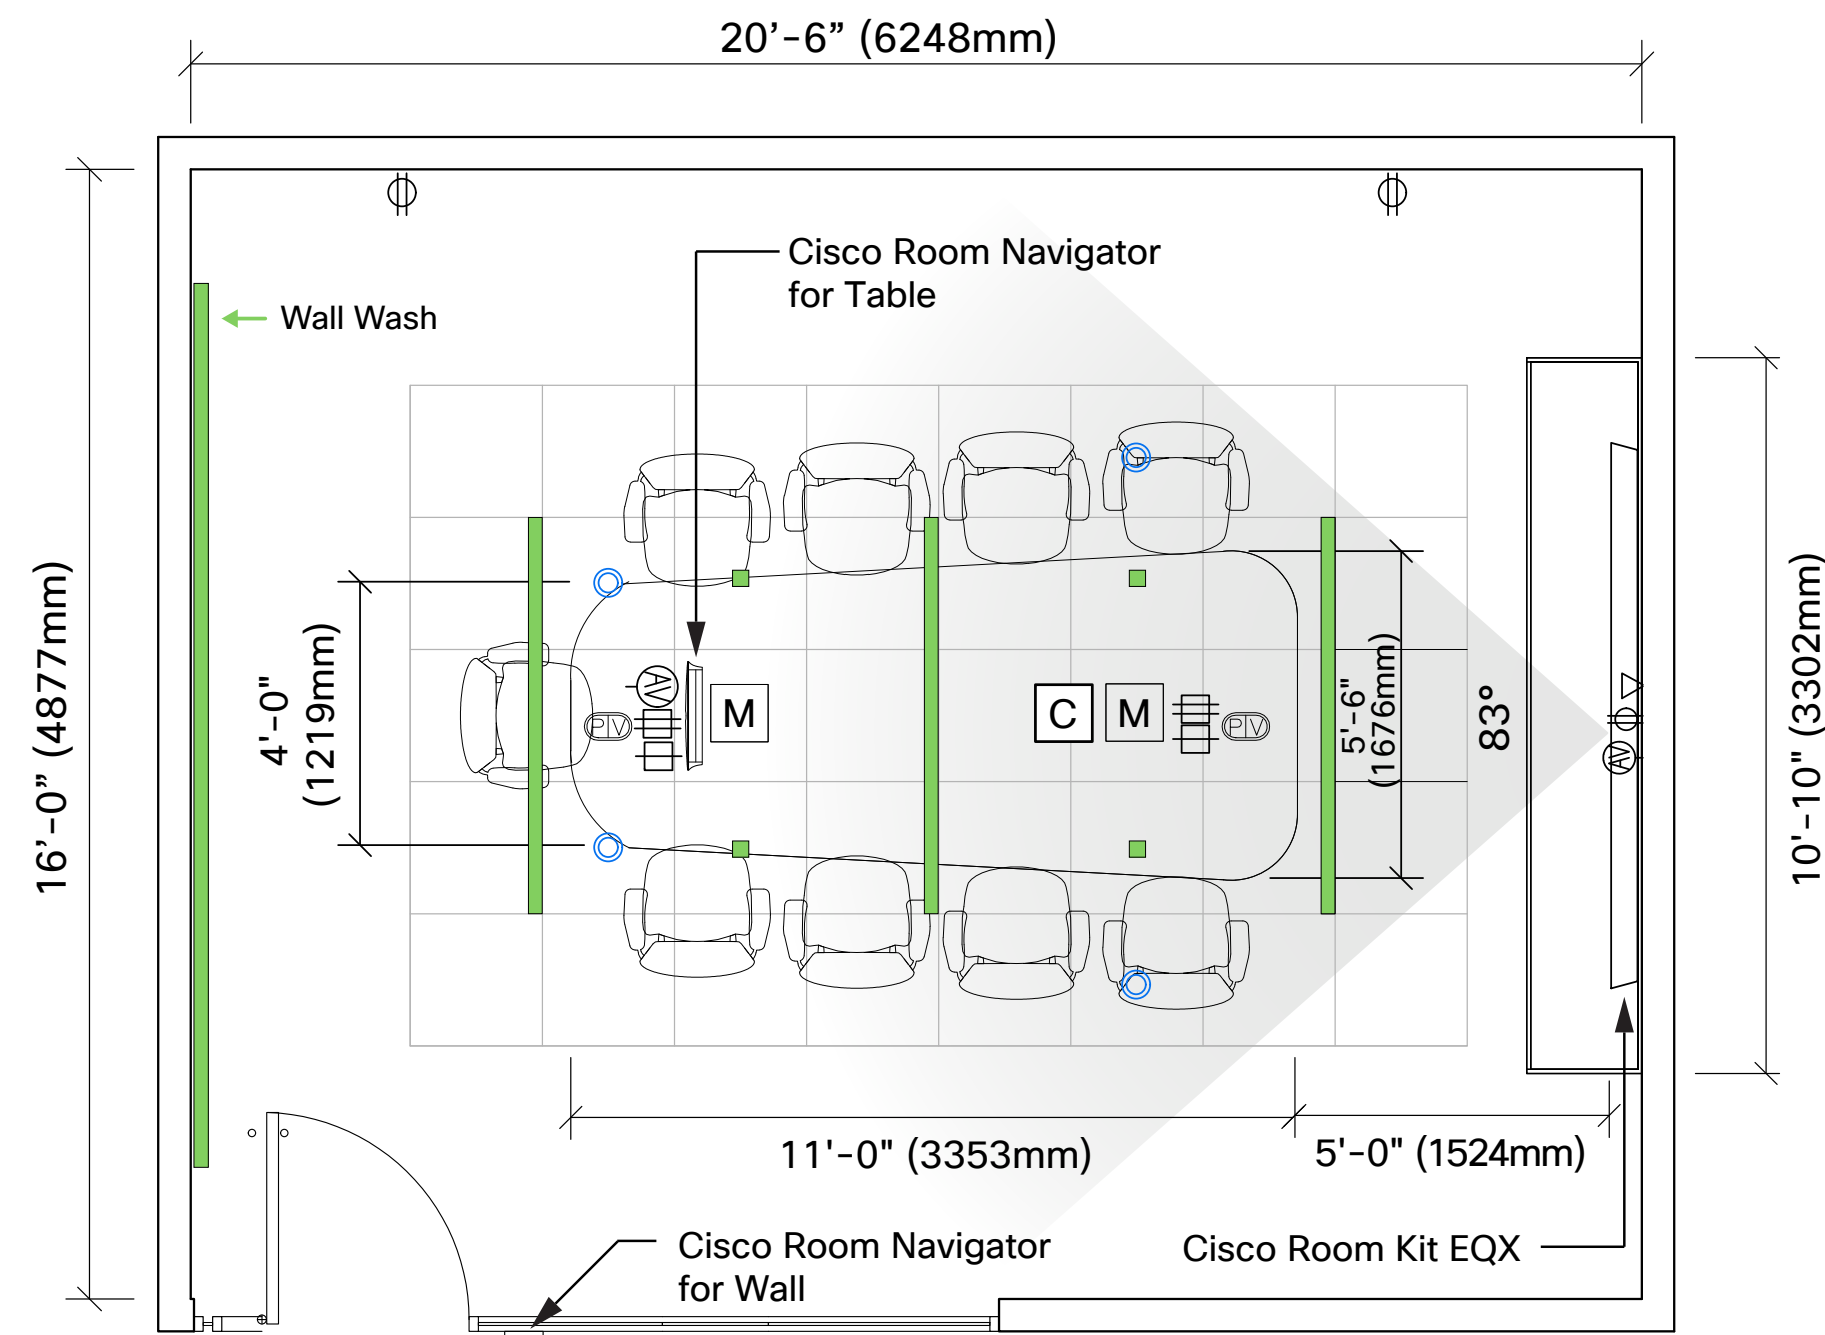

i Note: Room dimensions show are the minimal size, based on the technology and furniture options shown.

Layout Using the Cisco EQX Floor Stand

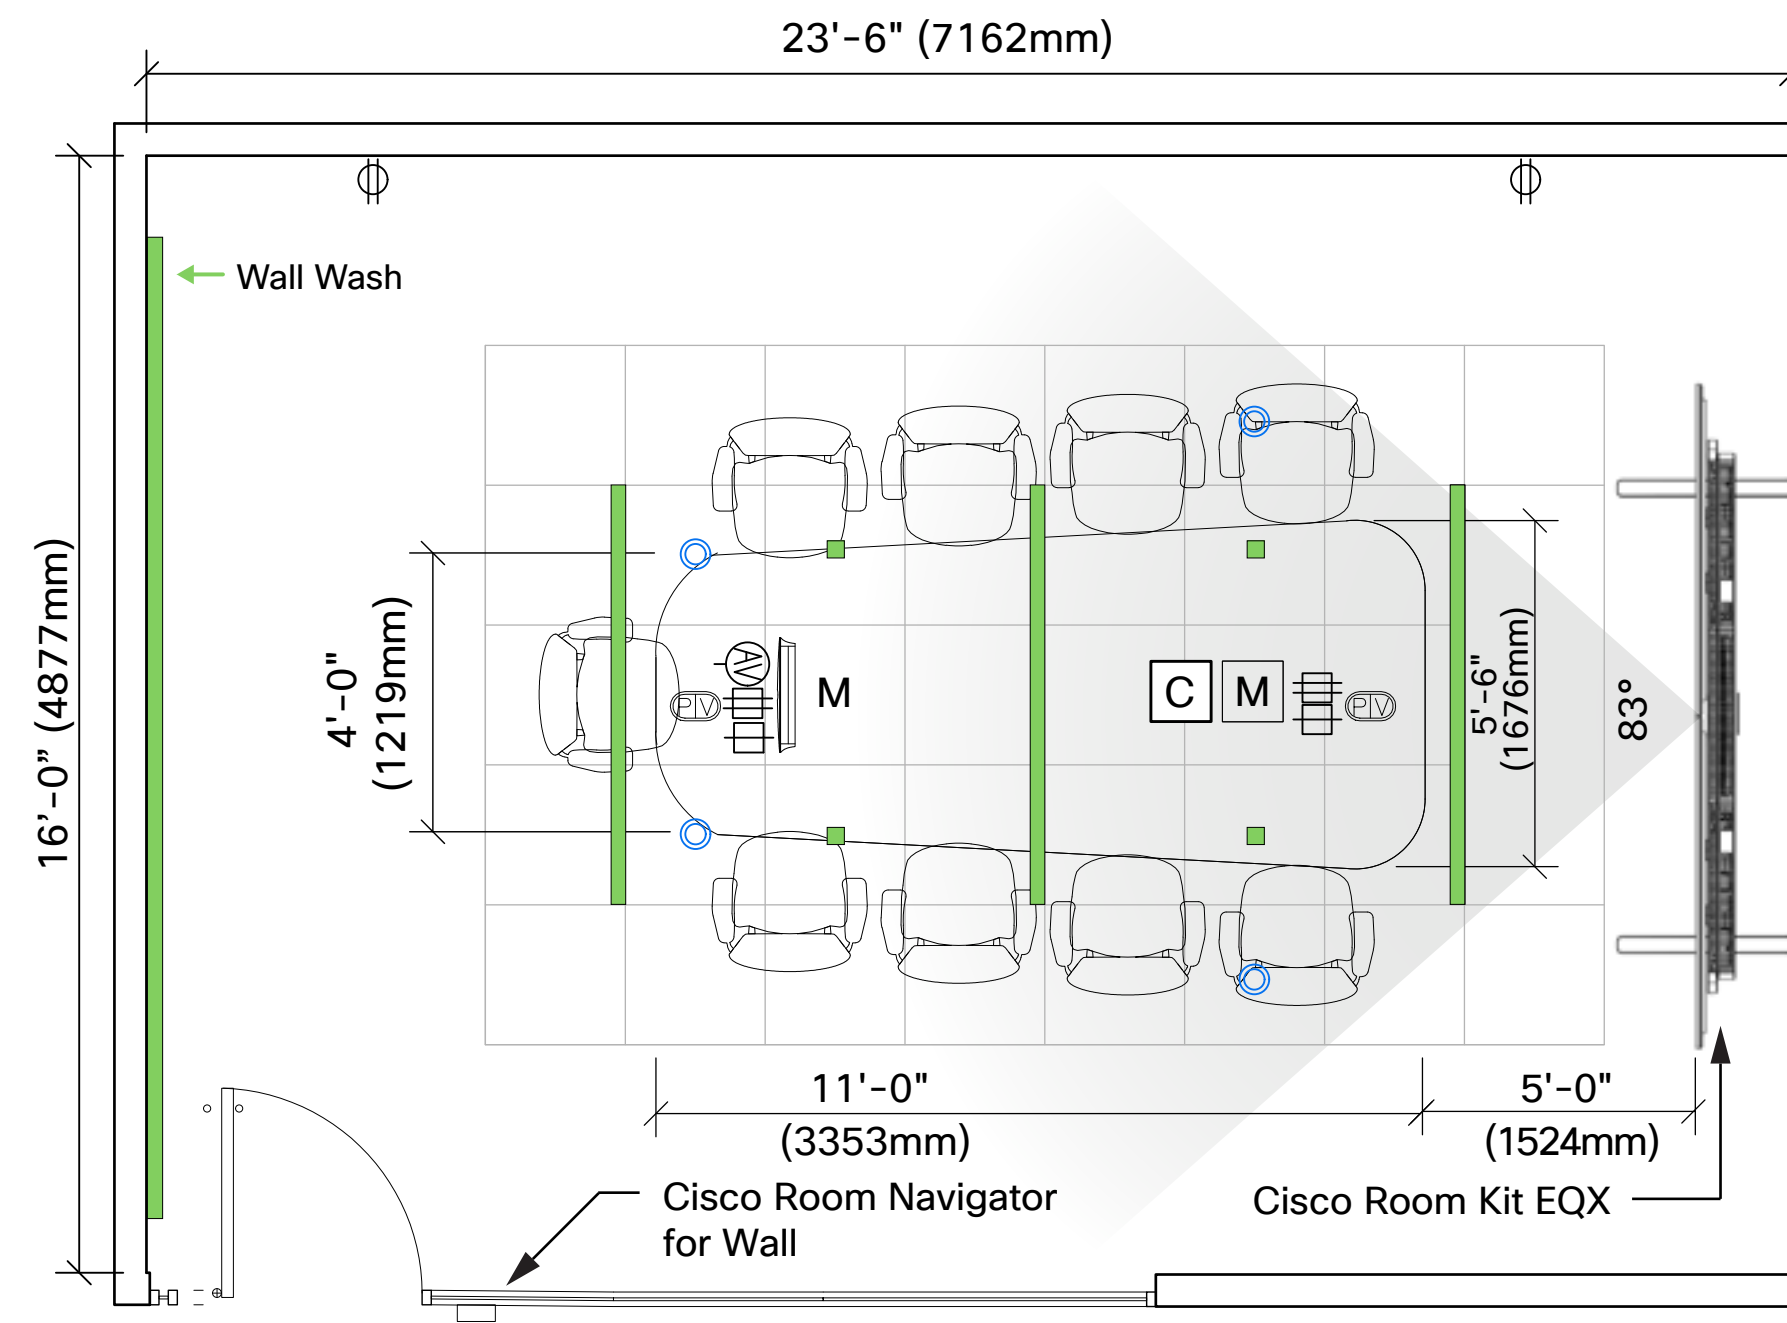

i Note: Room dimensions shown are the minimal size, based on the technology and furniture options shown. The length of this space is slightly larger than what is shown for the Wall Mount, Credenza, and Wall Stand options due to the width of the legs on the Cisco EQX Floor Stand.

Graphics Symbols

- Acoustical Ceiling & Grid
- HVAC Diffusers (T.B.D.)
Shown as Example Only
- Light Fixtures
- Acoustical Wall
- Furniture Systems Version Devices**
- Duplex Receptacle & Grid
- Data Receptacle
- Power and Communication**
- WALL / CEILING / FLOOR VERSION DEVICES**
- Cisco Ceiling Microphone Pro
- Third Party Speakers (Optional)
- Duplex Receptacle
- Data Receptacle
- Light Switch
- AV Receptacle
- Table Microphone
- Combination Power & Voice / Data Infeed

Video Device Mounting Options

Option 3 Cisco Room Kit EQX

There are four mounting options for the device when using the Cisco Room Kit EQX in the Medium Collaboration Room – Dual Display. The physical conditions of the space, desired aesthetics, and required amenities will define which solution is most appropriate.

Option 3a Wall Mount

Wall Mounted – Requires wall to be blocked and electrical and data to be elevated.



Option 3b A/V Credenza

Freestanding – Does not require wall blocking. Perfect for retrofit installations, or when trash, recycling and/or extra storage is required.



Option 3c Wall Stand

Wall tethered – An effective solution when the wall is not blocked, but still may require power and data to be relocated.



Option 3d Floor Stand

Freestanding – A perfect for retrofits, open area deployments, or when video needs to be installed quickly.




Room Elevations




Cisco Room Kit EQX with Wall Mount

Construction Elevation

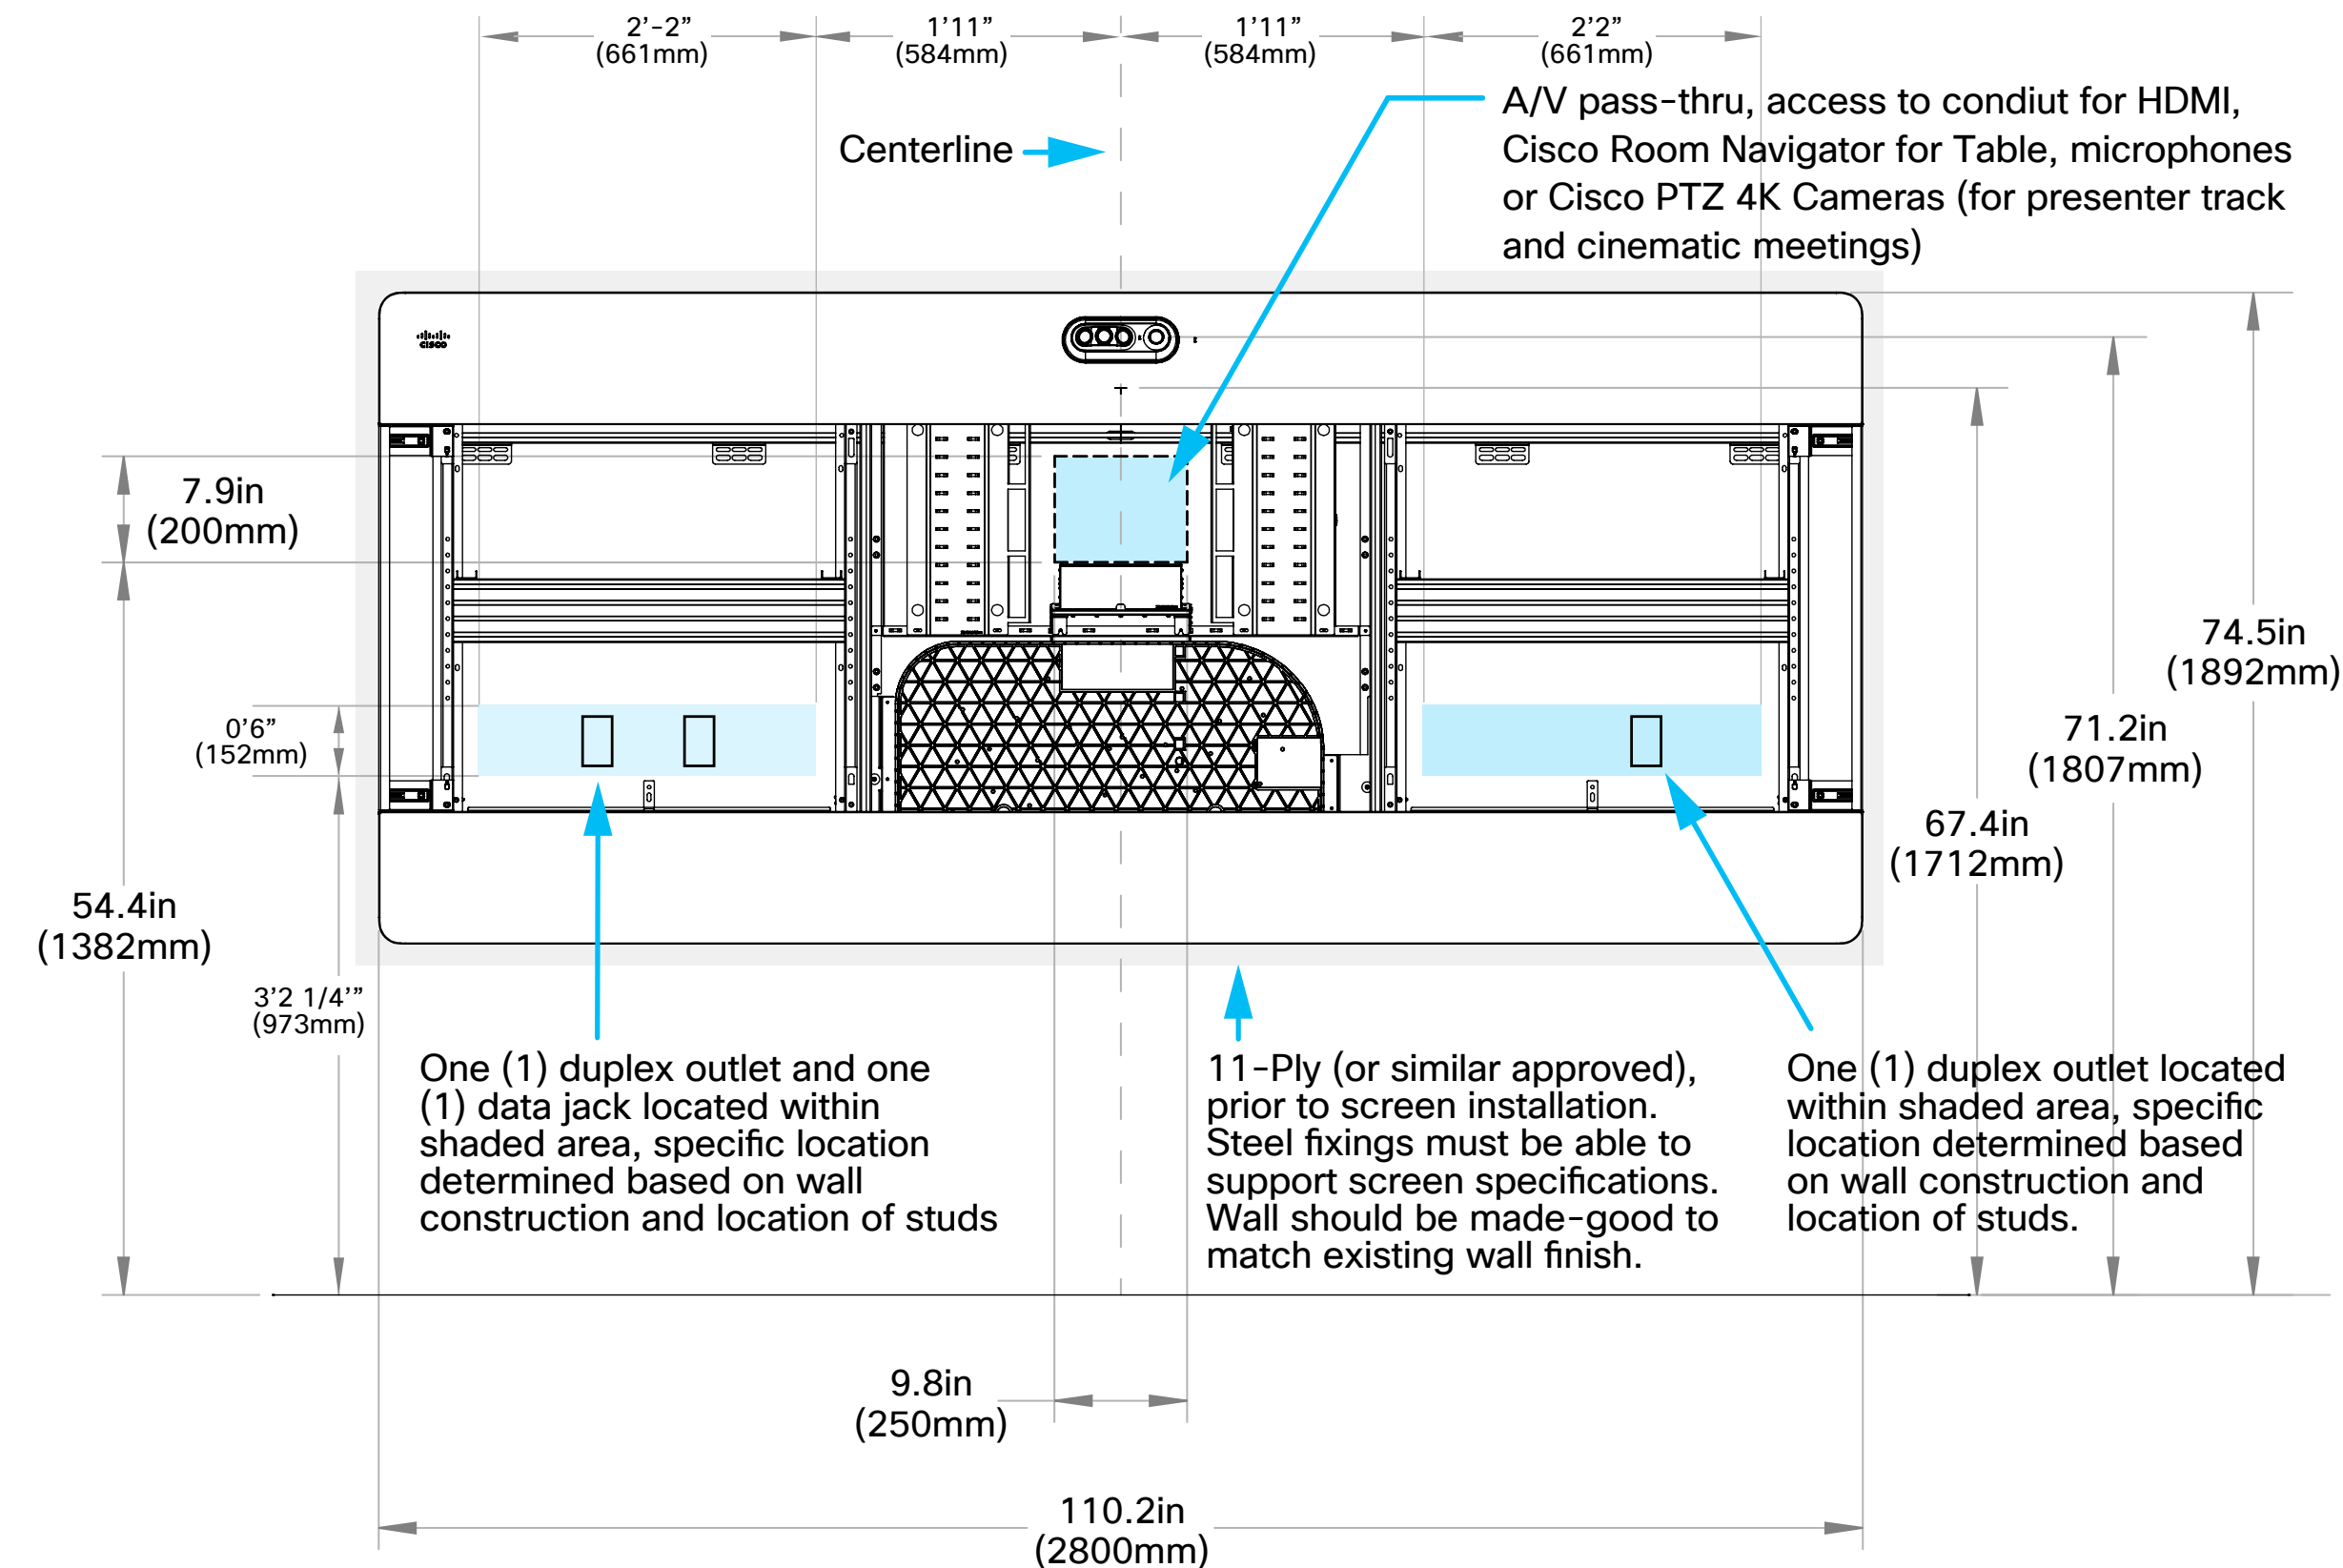

Side Elevation

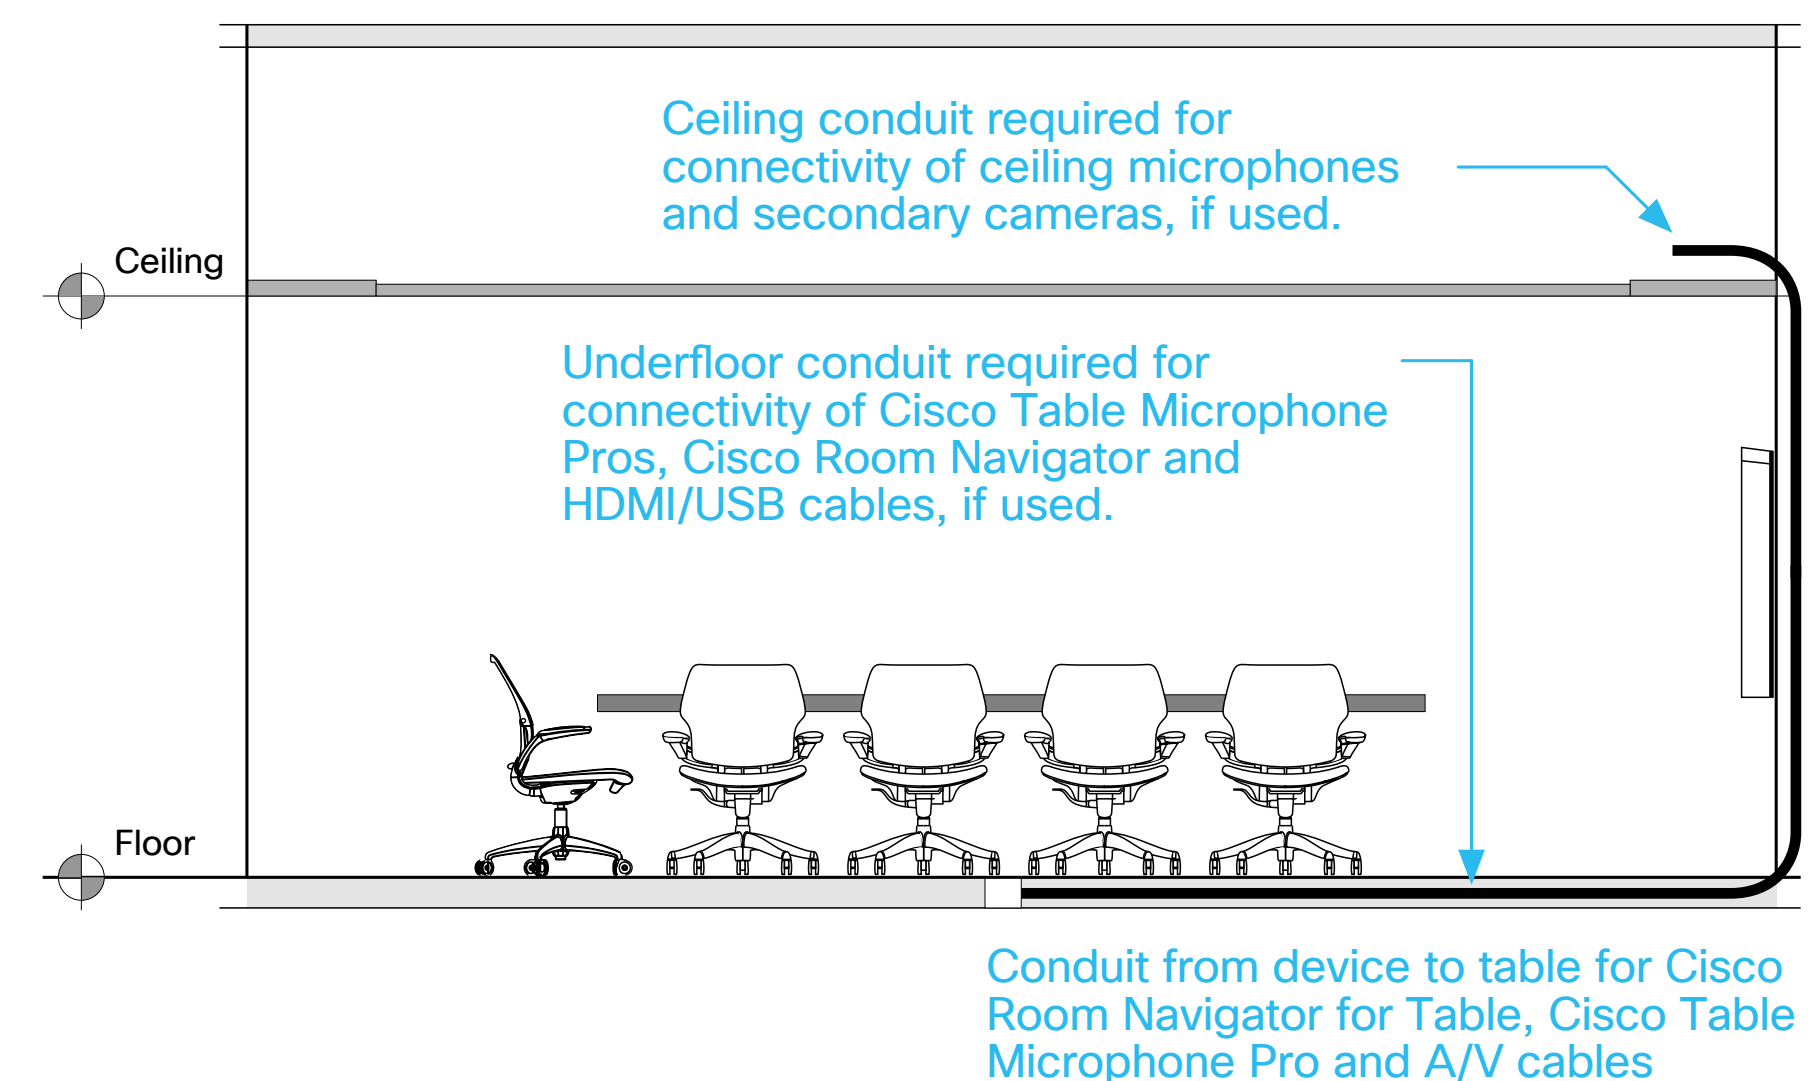


i Due to the depth of EQX, furniture, millwork or a cane rail may be required to meet local accessibility codes.


Room Elevations

Option 3b Cisco Room Kit EQX with A/V Credenza


Construction Elevation

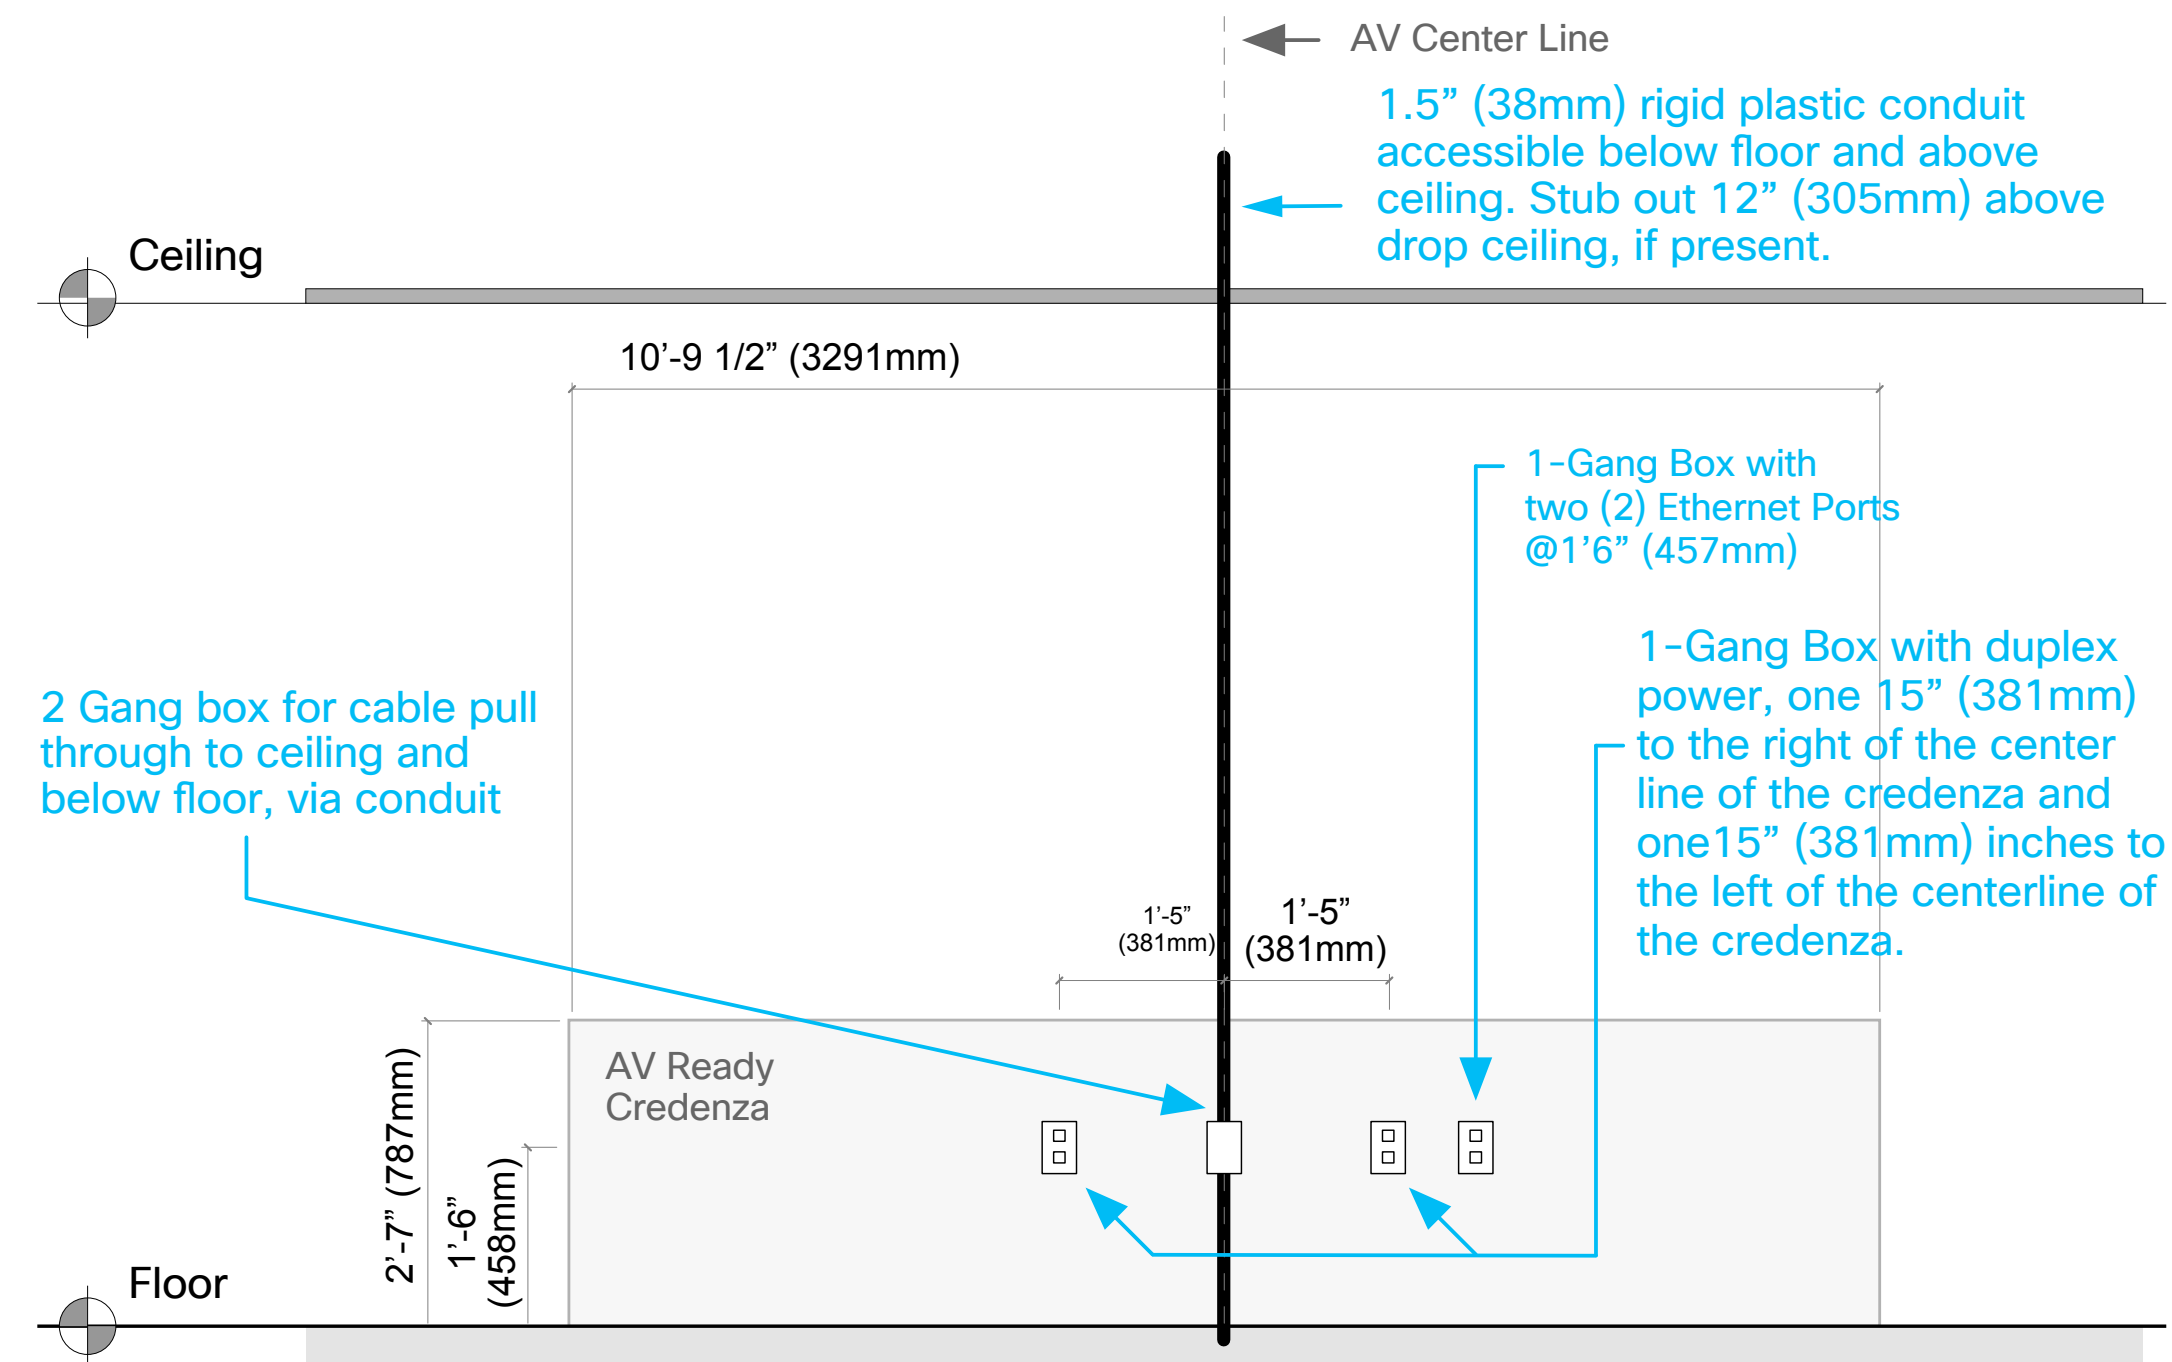

Finished Elevation

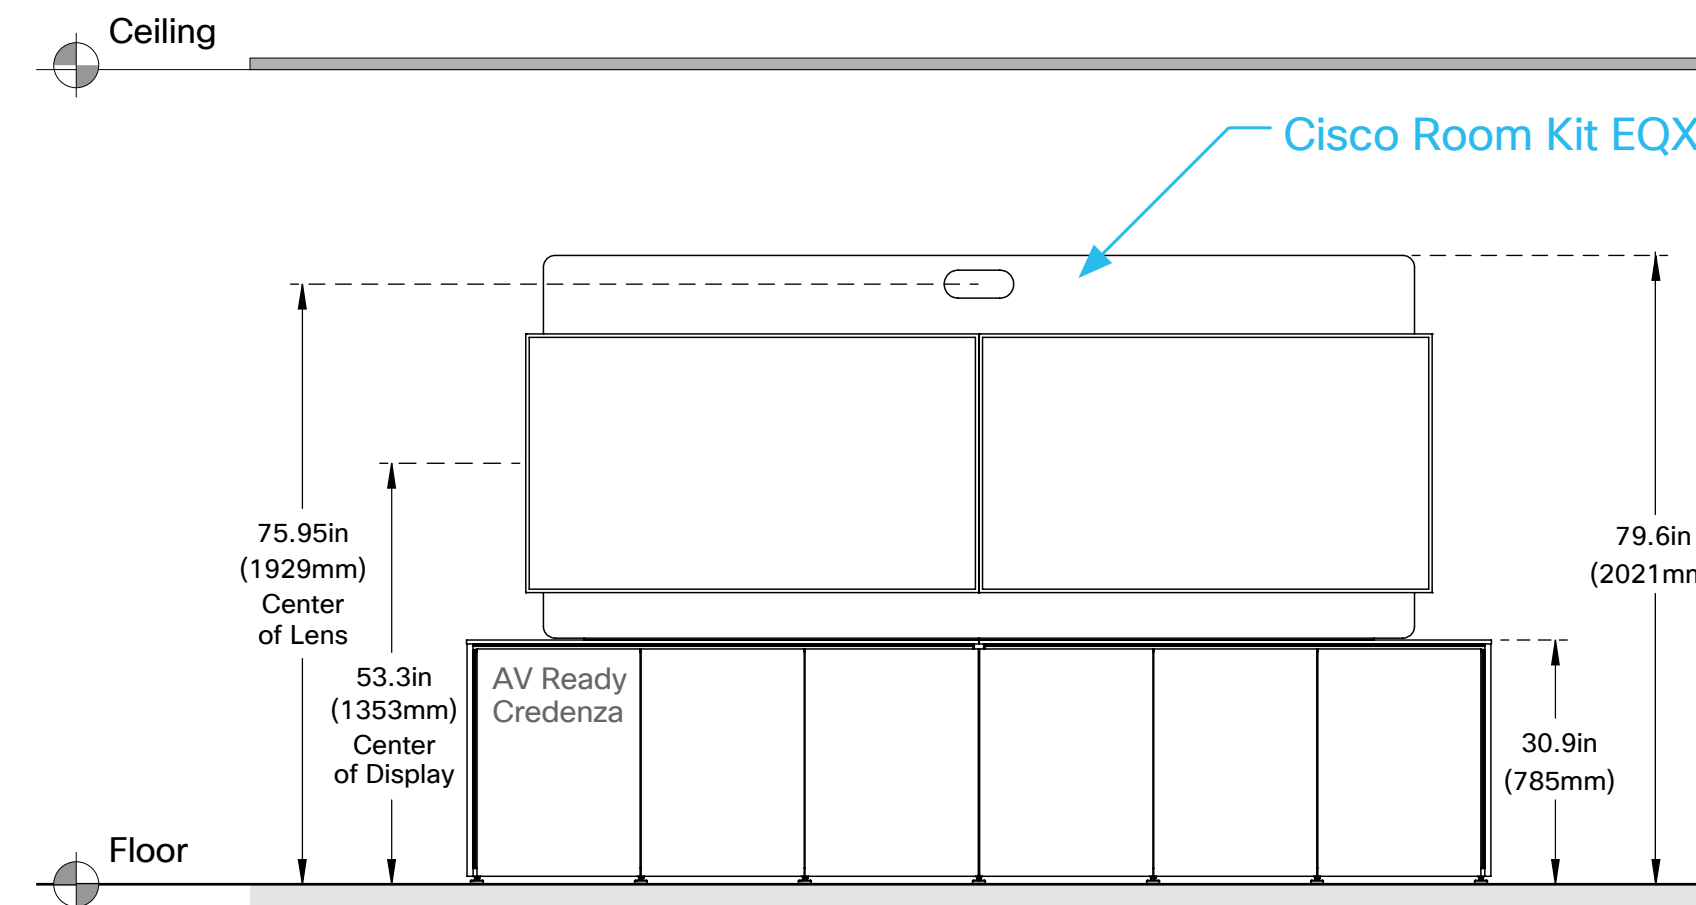

Side Elevation

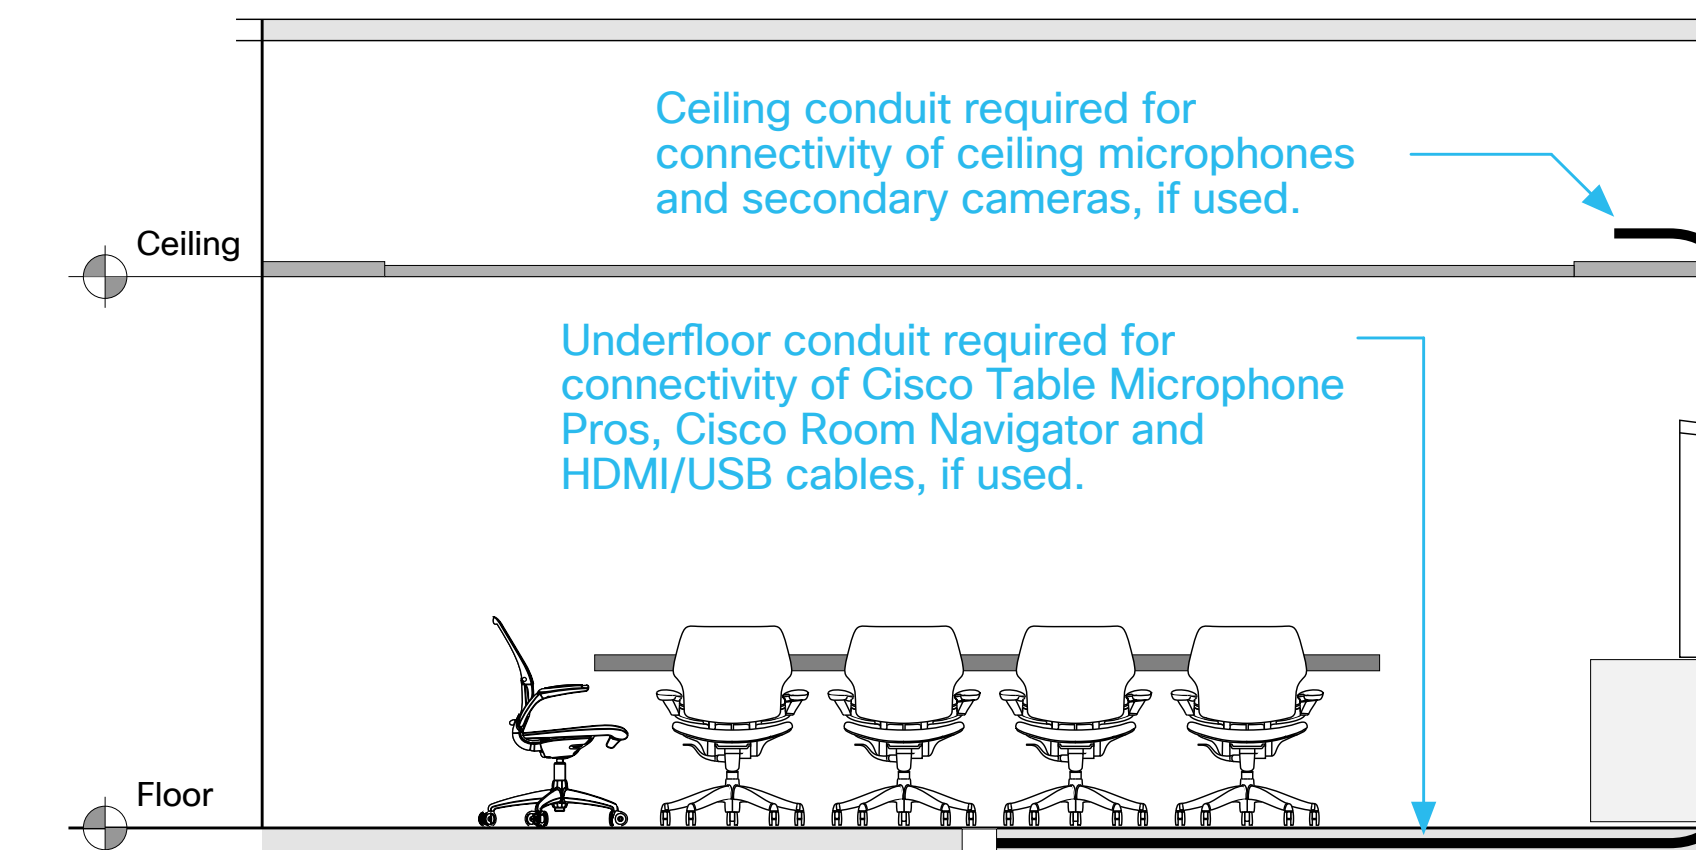


Conduit from device to table for Cisco Room Navigator for Table, Cisco Table Microphone Pro and A/V cables

Room Elevations




Cisco Room Kit EQX with Wall Stand

Construction Elevation

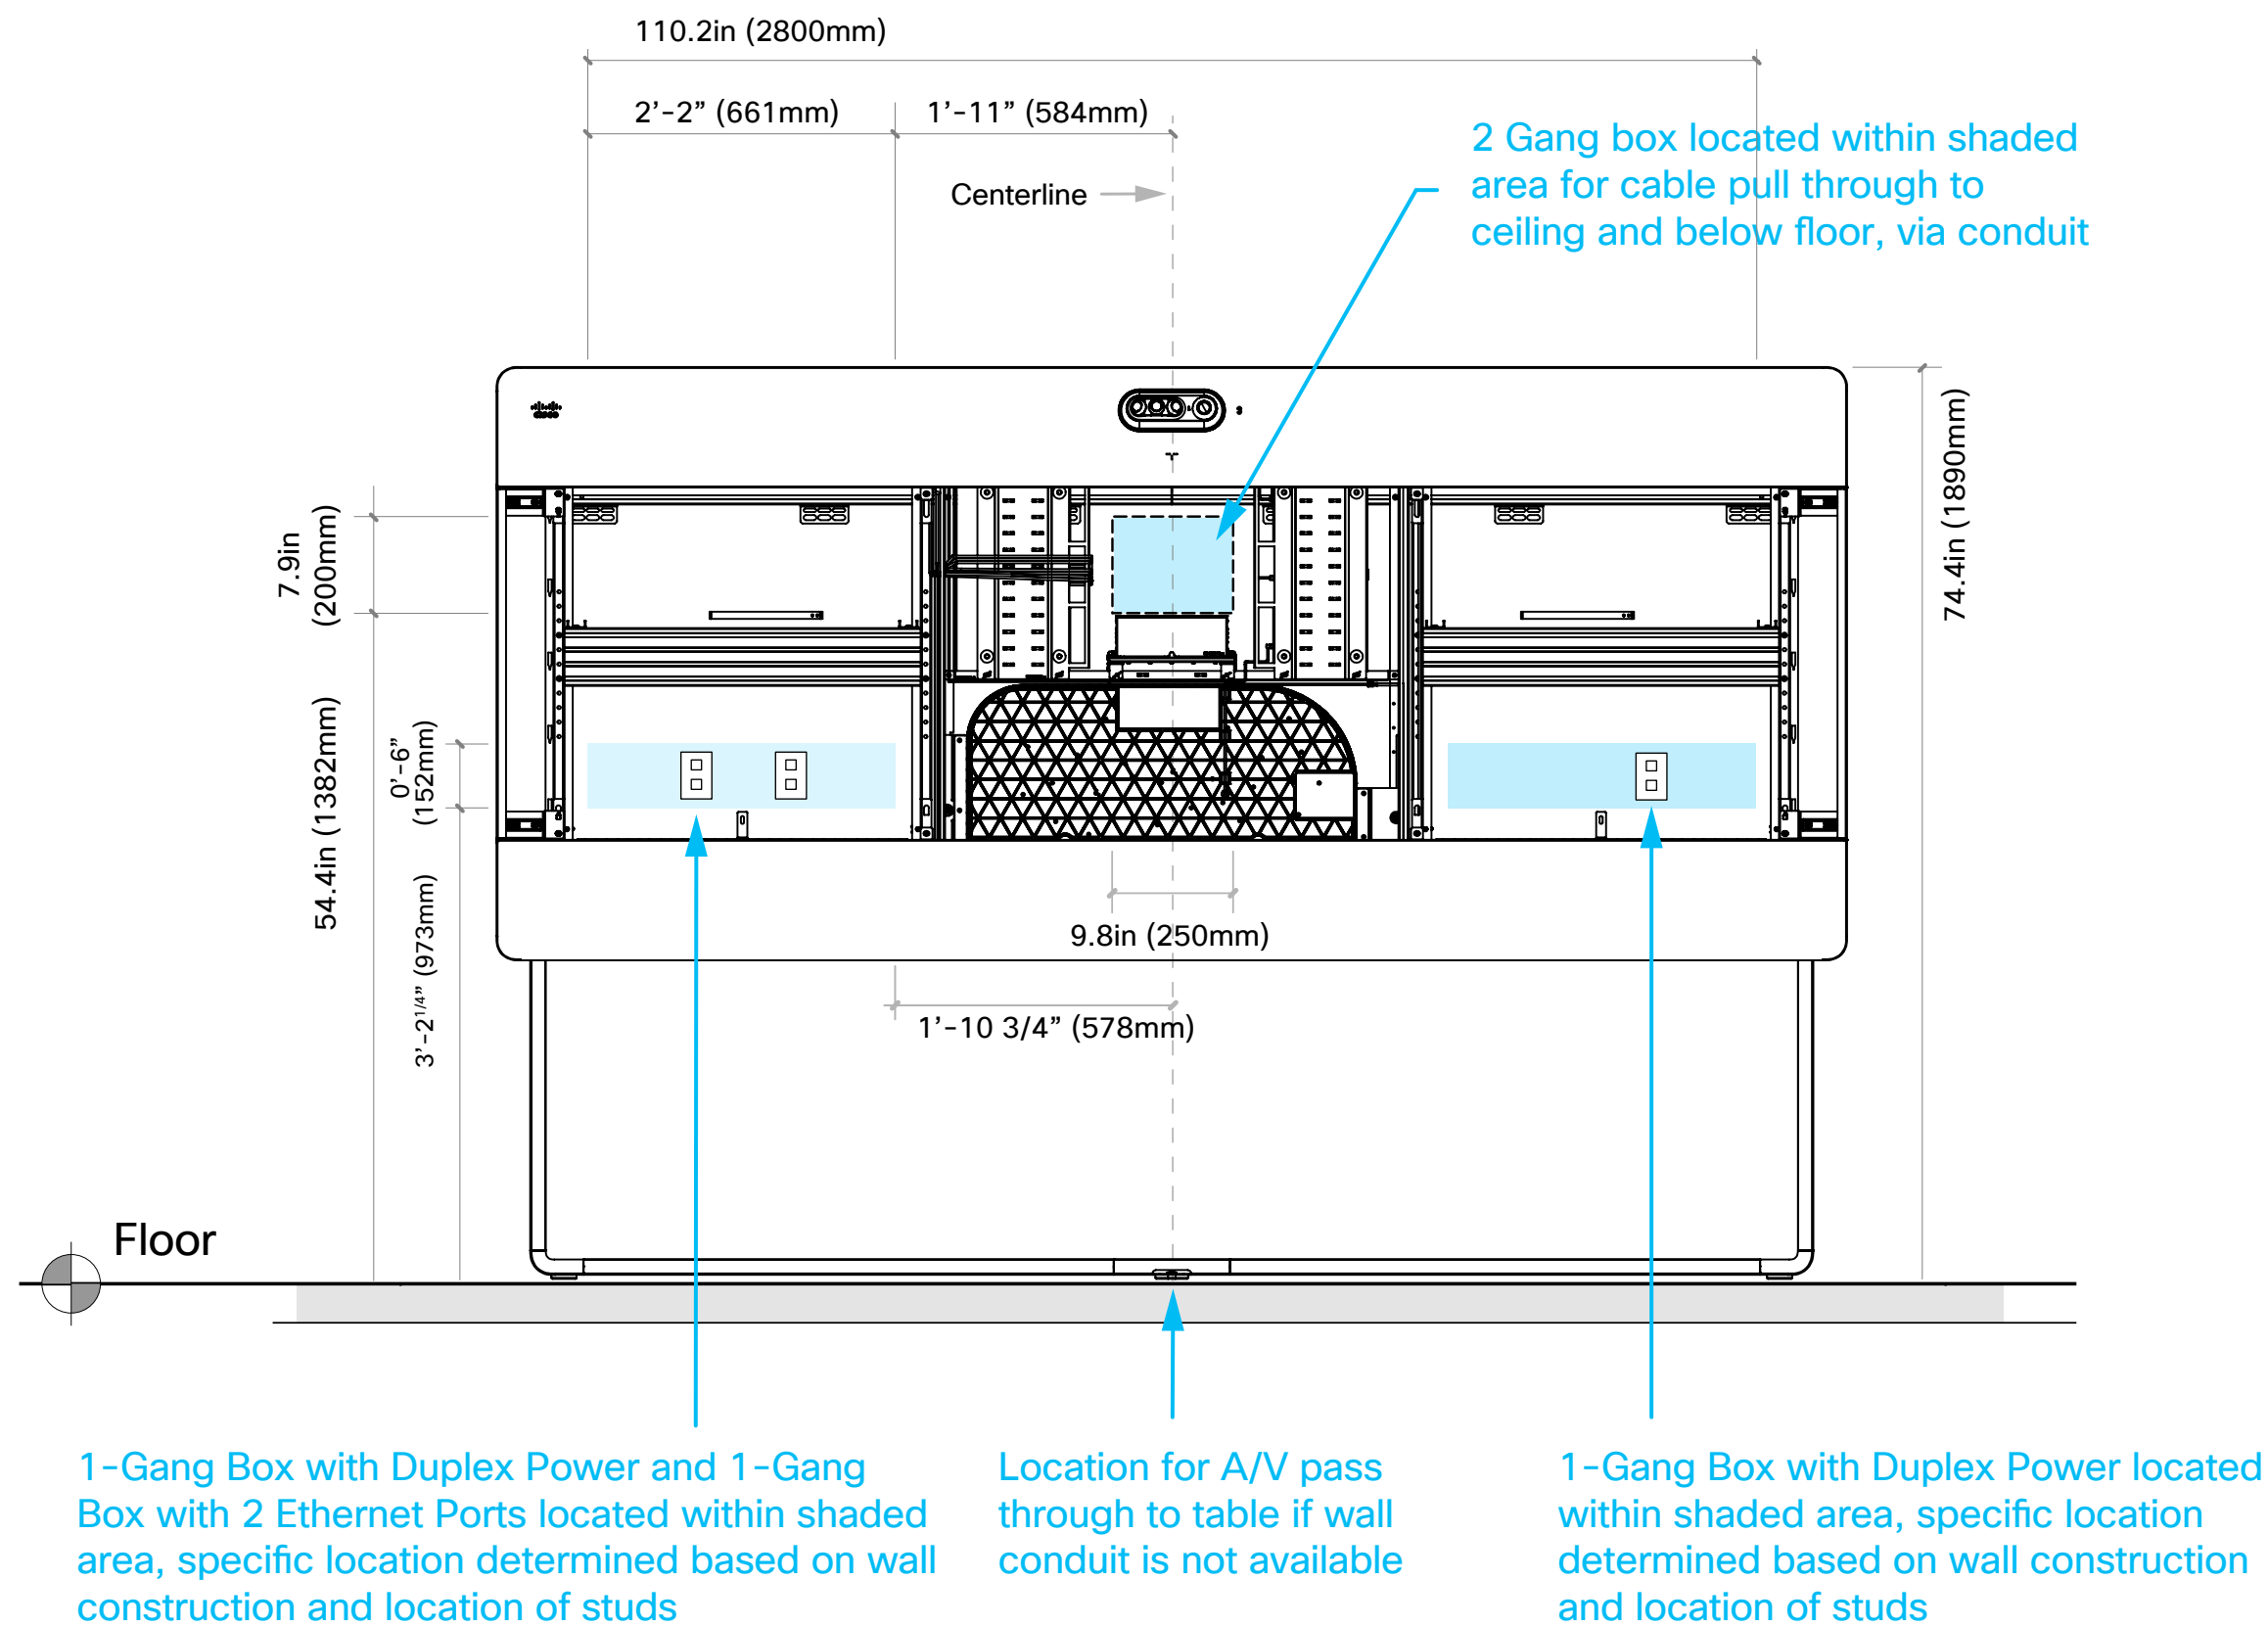


Side Elevation

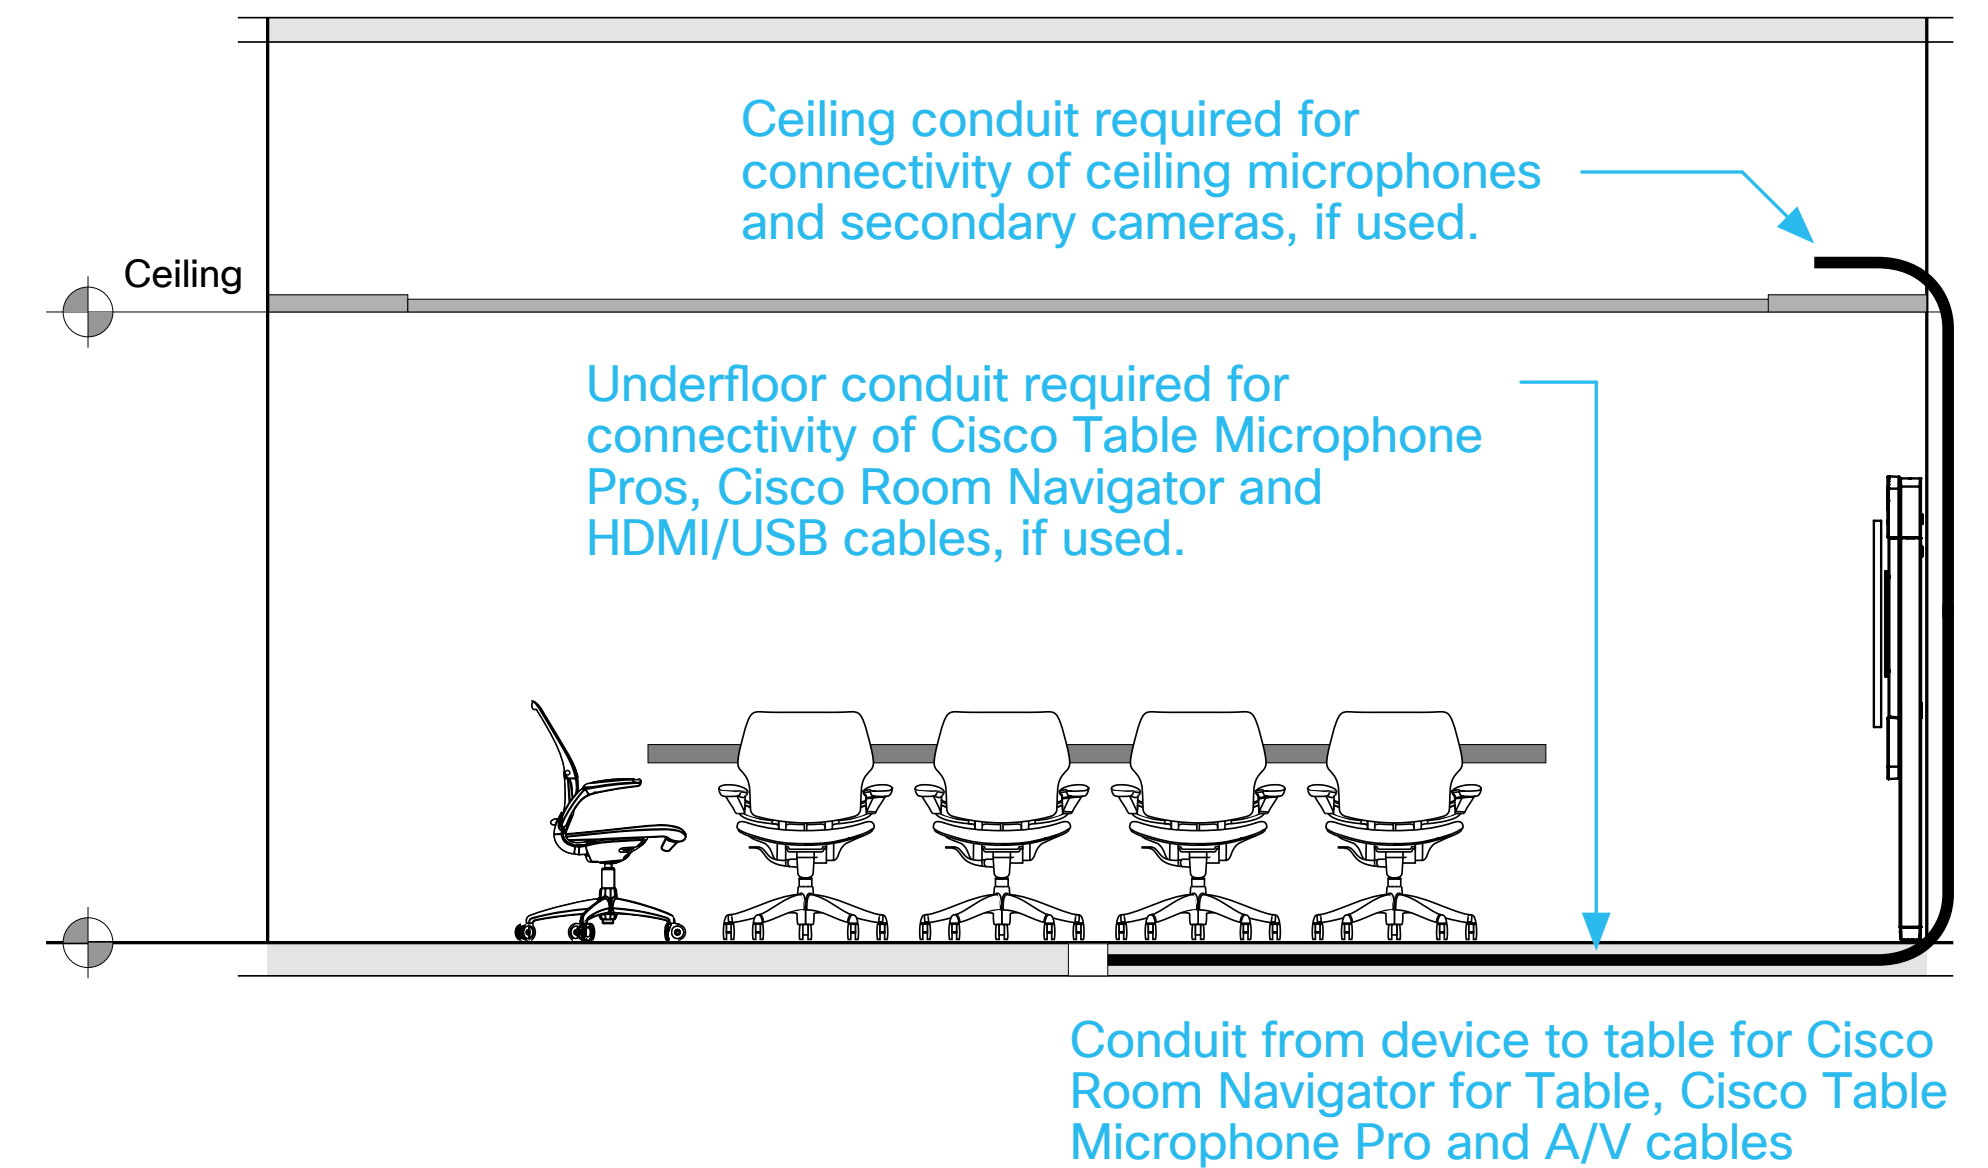

Room Elevations

Option
3d


Cisco Room Kit EQX with Floor Stand

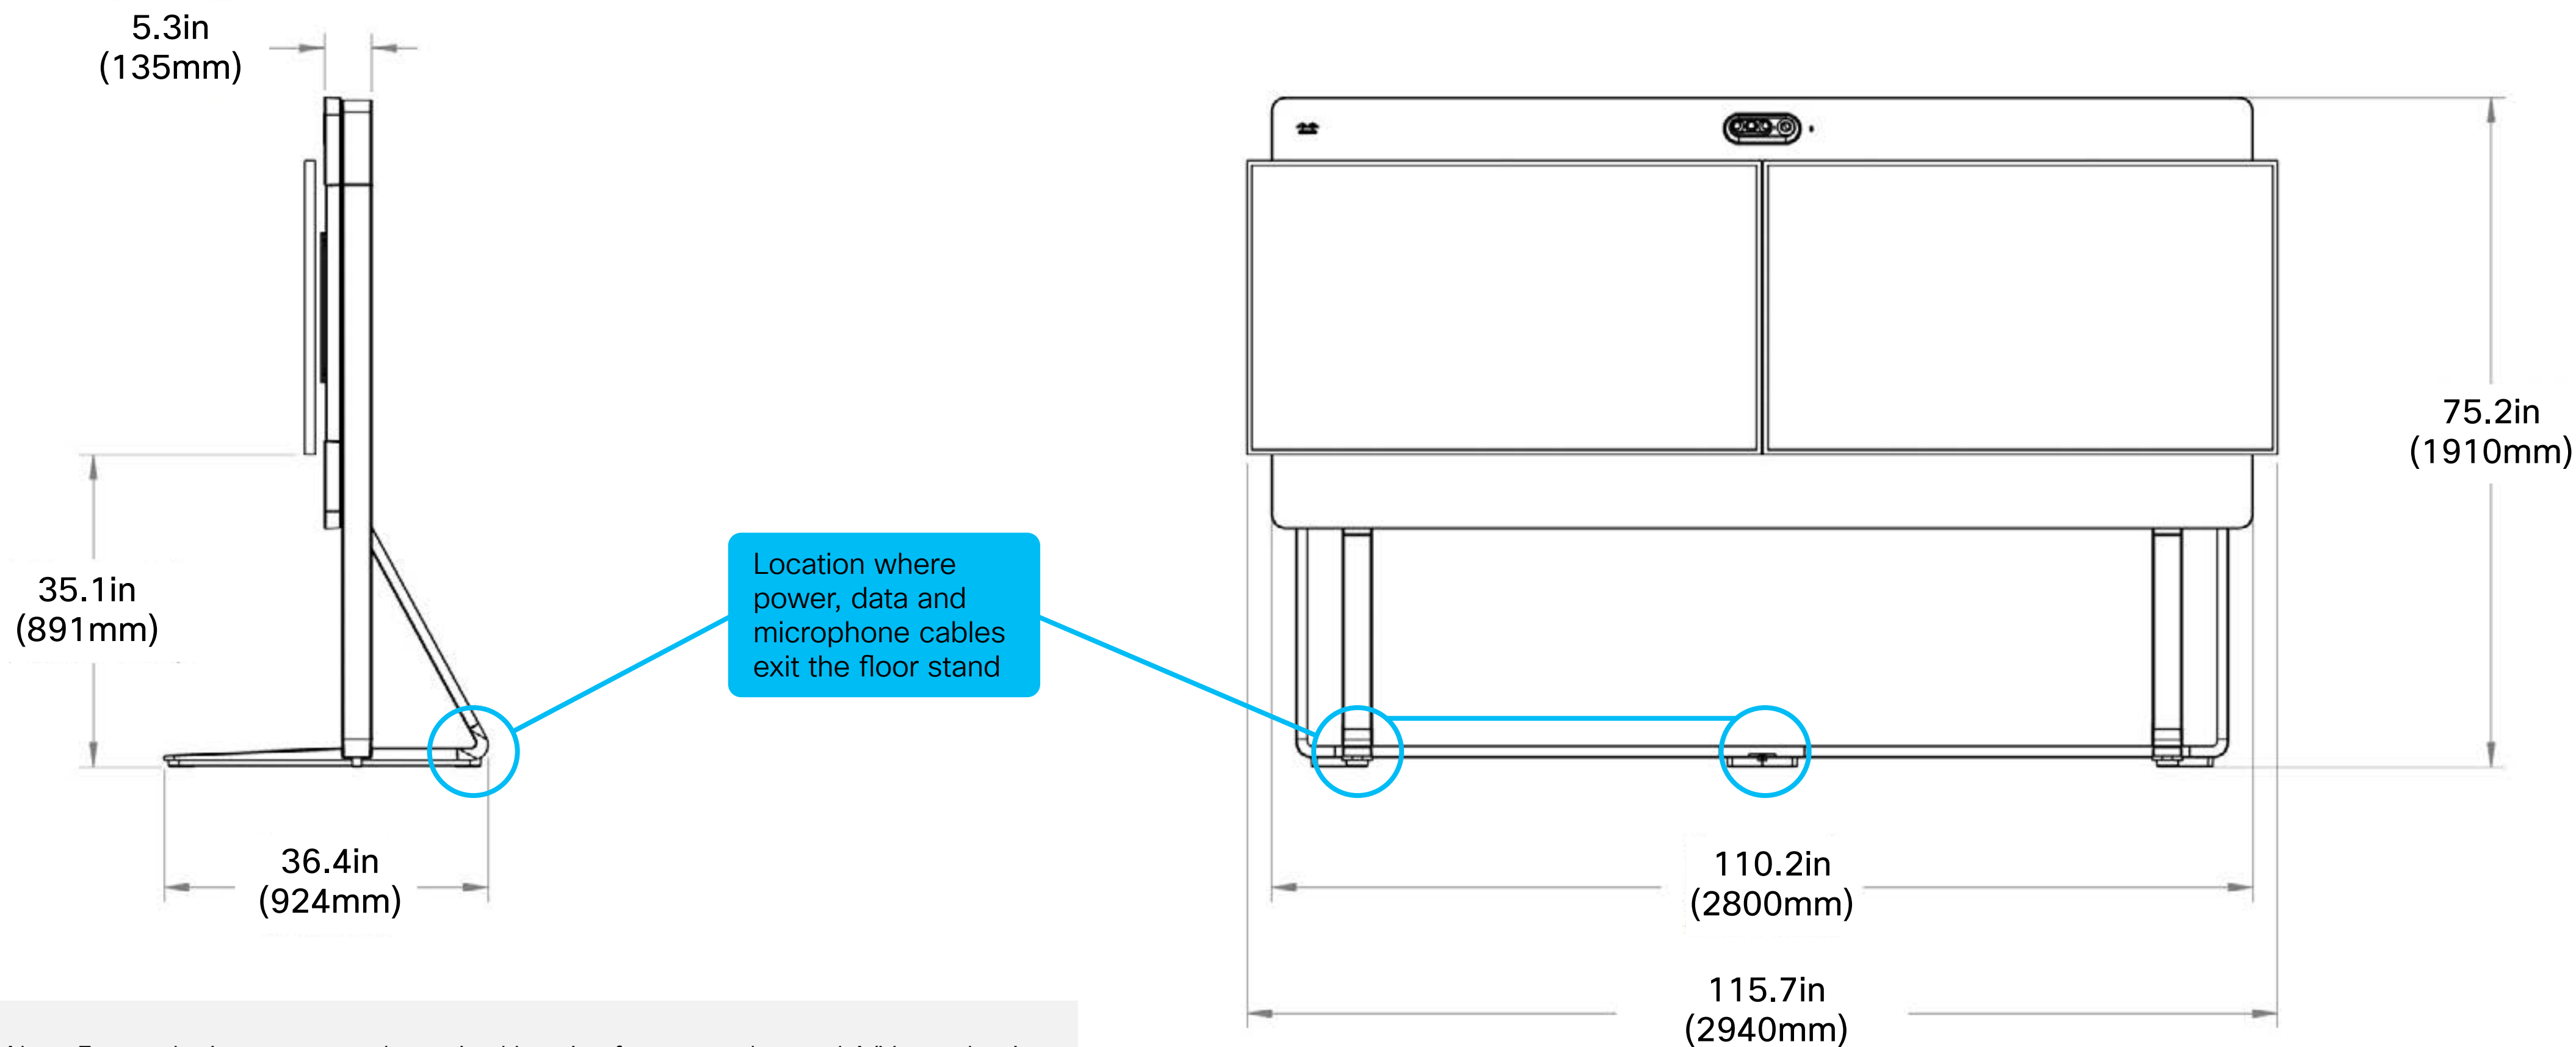


Note: For aesthetics purposes, the optimal location for power, data and A/V passthru is in floor boxes. Wall mounted outlets, either standard or elevated, can also be used.

Reflective Ceiling Plan & Acoustical Treatment

Layout Using Wall Mount, Wall Stand, or A/V Credenza

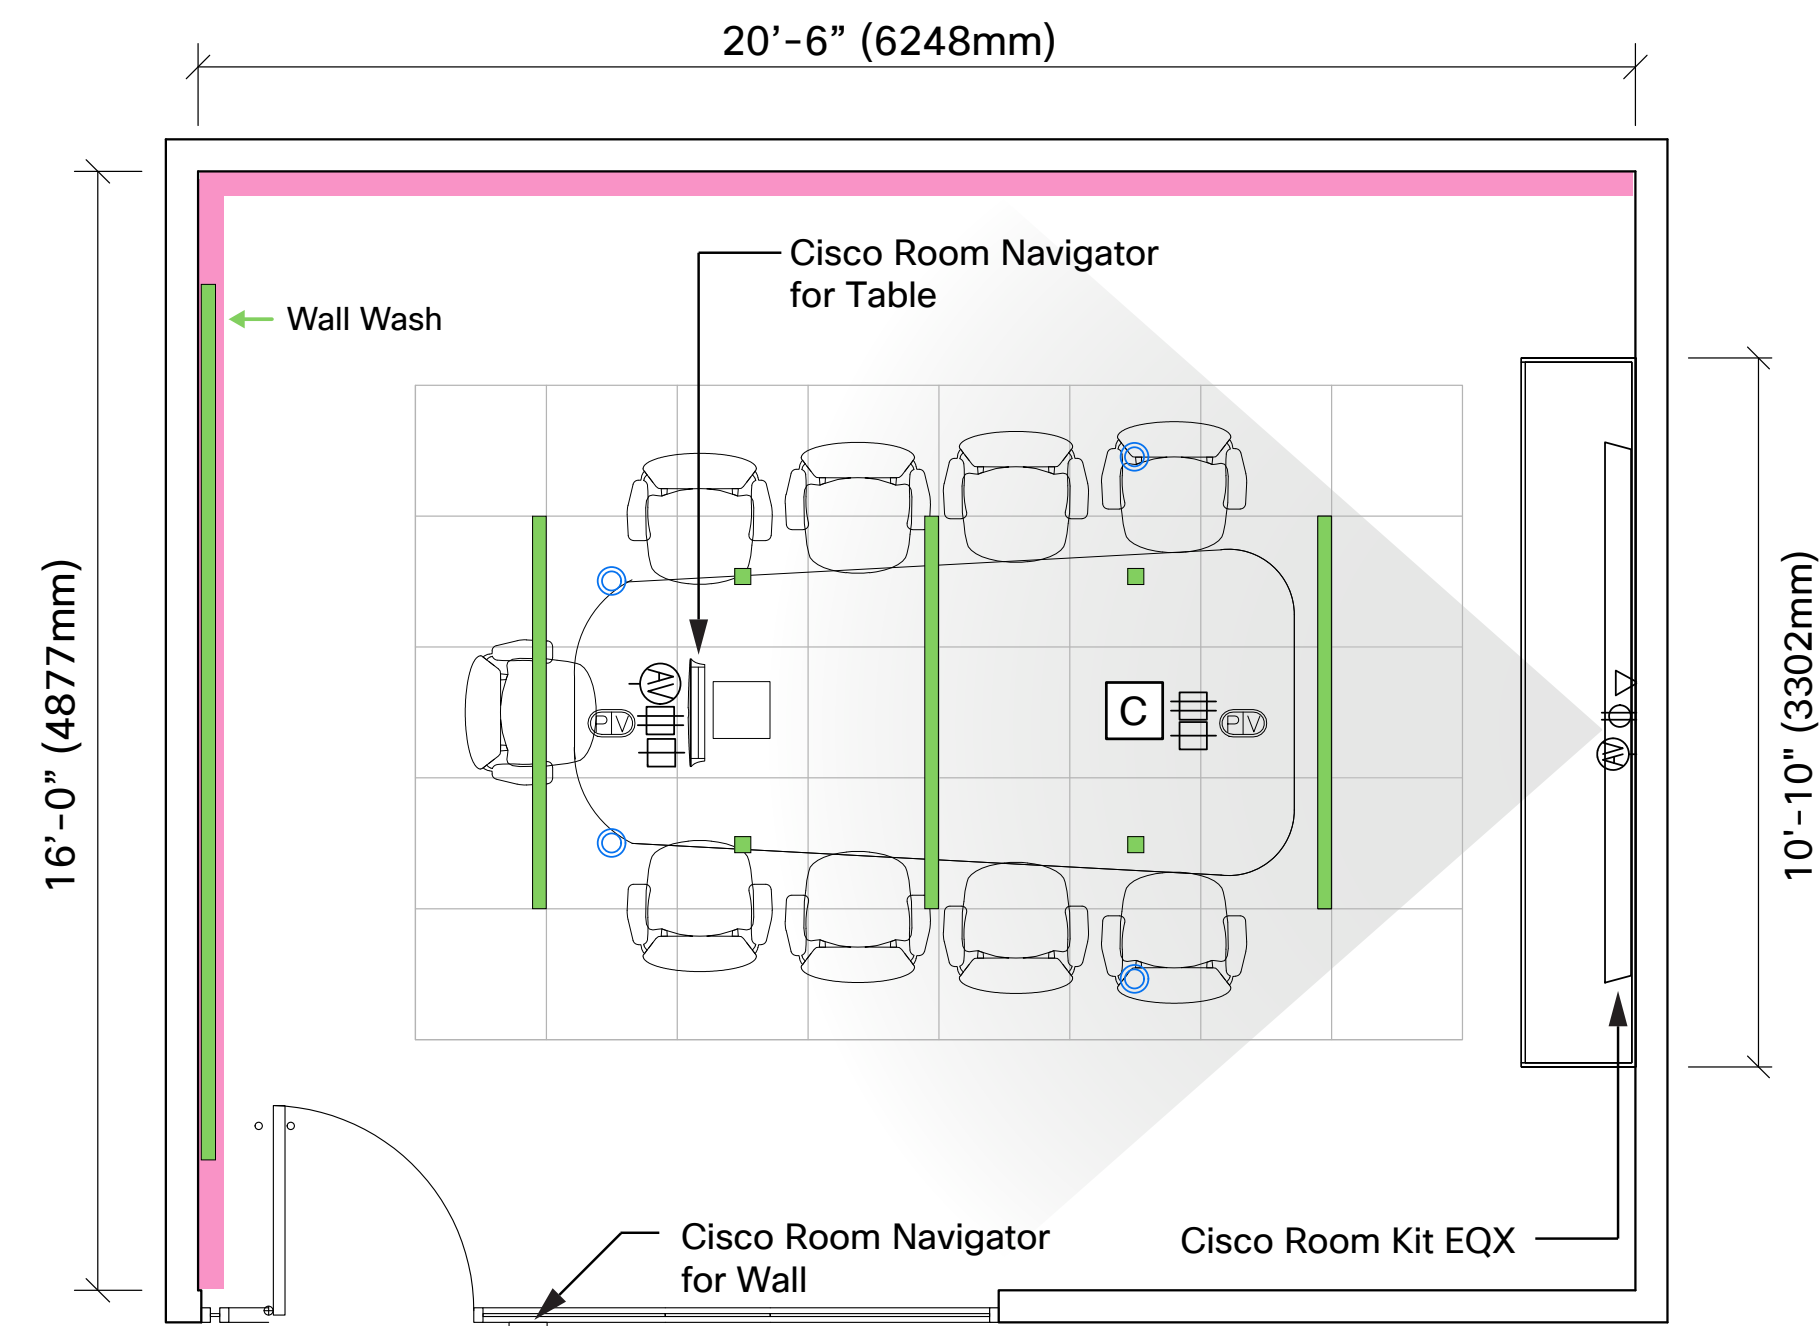

Layout Using the Cisco EQX Floor Stand

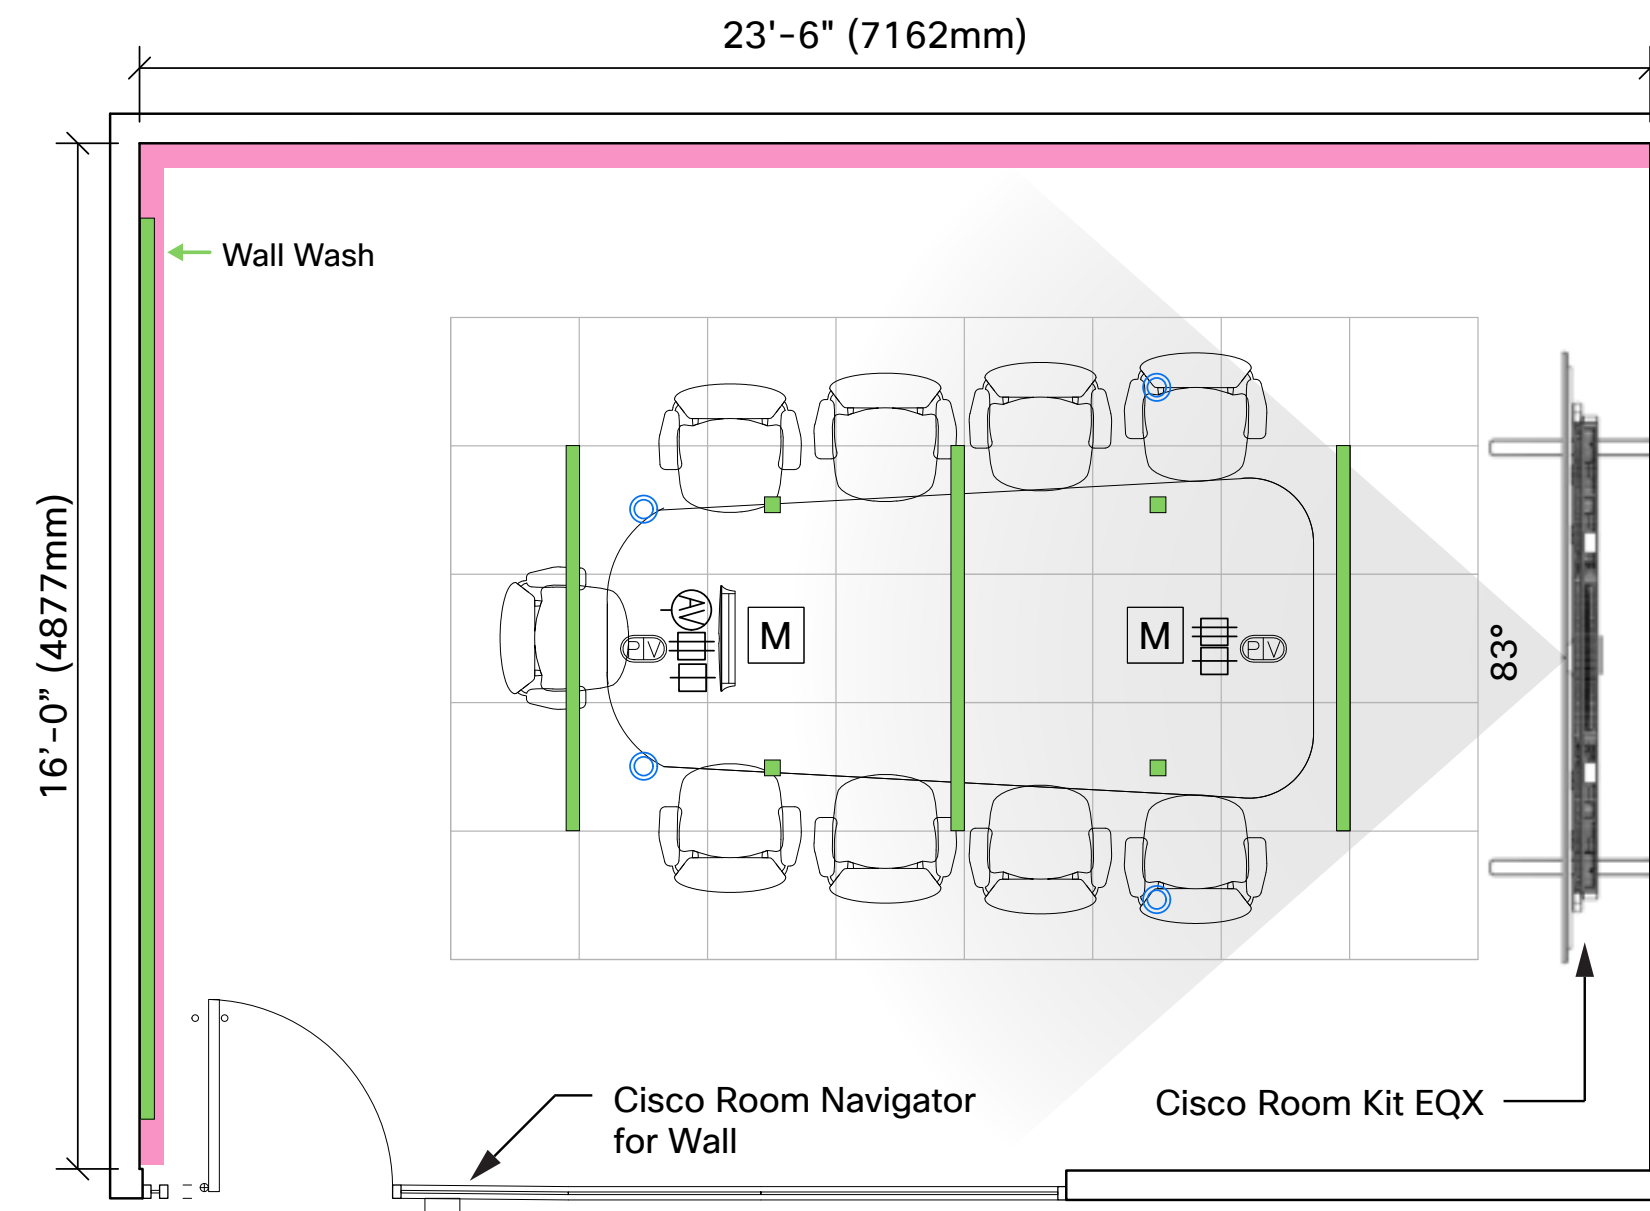

Graphics Symbols

- Acoustical Ceiling & Grid
- HVAC Diffusers (T.B.D.)
Shown as Example Only
- Light Fixtures
- Acoustical Wall
- Furniture Systems Version Devices**
- Duplex Receptacle & Grid
- Data Receptacle
- Power and Communication**
- WALL / CEILING / FLOOR VERSION DEVICES**
- Cisco Ceiling Microphone Pro
- Third Party Speakers (Optional)
- Duplex Receptacle
- Data Receptacle
- Light Switch
- AV Receptacle
- Table Microphone
- Combination Power & Voice / Data Infeed

● A glare-free luminary with a beam angle of 90° or wider is recommended. In addition, fixtures selected should have a color temperature of ~4000K and color rendering index (CRI) of 85 or better.

● Two walls of acoustical wall treatment is optimal, preferred location is wall opposite device and then adjoining, away from entry location.



Medium Collaboration Room

Power & Data

General Specifications

Power/data requirements need to be verified for each project. Provide video device power/data even if the project plan does not include it on day one. Based on the design of this space, core drills and floor boxes will be required.

Power in Tabletop

User power should be surface mounted in the tabletop. If pop-ups or table wells are used, it is important to verify that they can accommodate all laptop power supplies. Provide shared power – 1 power port for every two seats.

Power & Data

The Cisco Room Kit EQX requires two (2) duplex outlets and one (1) data receptacle with two (2) ethernet ports, located on the wall behind the device (a second data receptacle can also be added for redundancy/future use). Suggested locations for these services can be found in the “Elevations” section of this document. Exact location, however, should be verified with A/V consultants and installation personnel. In addition, a duplex power outlet must be available under the table for the PoE compatible switch supporting the Cisco Microphone Pros.

Exploded IT Diagram



Cisco Room Navigator for Table (required)

The preferred method of connectivity for the Cisco Room Navigator for Table is directly to one of the four (4) general use PoE ports on the Cisco Room Kit EQX. Alternatively, the Navigator can also be connected to a PoE compatible switch mounted under the table, which then connects back to a PoE port on the EQX, or directly to the network switch via a Ethernet port in the floor.

Cisco Room Navigator for Wall

It is recommended to run the cable inside the wall or through the door frame directly back to a network switch.

Cisco Microphones

External microphones are required, either a single Cisco Ceiling Microphone Pro or two (2) Cisco Table Microphone Pros (three, if Cinematic Cross view is enabled). Although the Cisco Room Kit EQX has four (4) general use PoE ports that can be used for connecting adjunct devices, two (2) of those are required to connect the camera and amplifier, and the third for the Cisco Room Navigator for

Table. Thus, the one remaining port can be used for the Ceiling Microphone Pro, or to connect a PoE compatible switch to support the Table Microphone Pros.

Third-party Speakers

Not required for a room of this size.

Table Top Charging


USB-C charging and convenience outlets on table top. Ensure the size of the trough and layout can accommodate a variety of laptop power supplies.

Wall Blocking


Required when the device is wall-mounted. The size and composition of blocking materials should be determined based on the overall weight of the solution deployed.

Core Drilling

Core Drill-Preferred method for providing connectivity between the table and the Cisco Room Kit EQX for the Cisco Room Navigator for Table, Cisco Table Microphone Pros and/or A/V cables. If core drilling is not an option, a floor cable cover or wire concealer can be used.

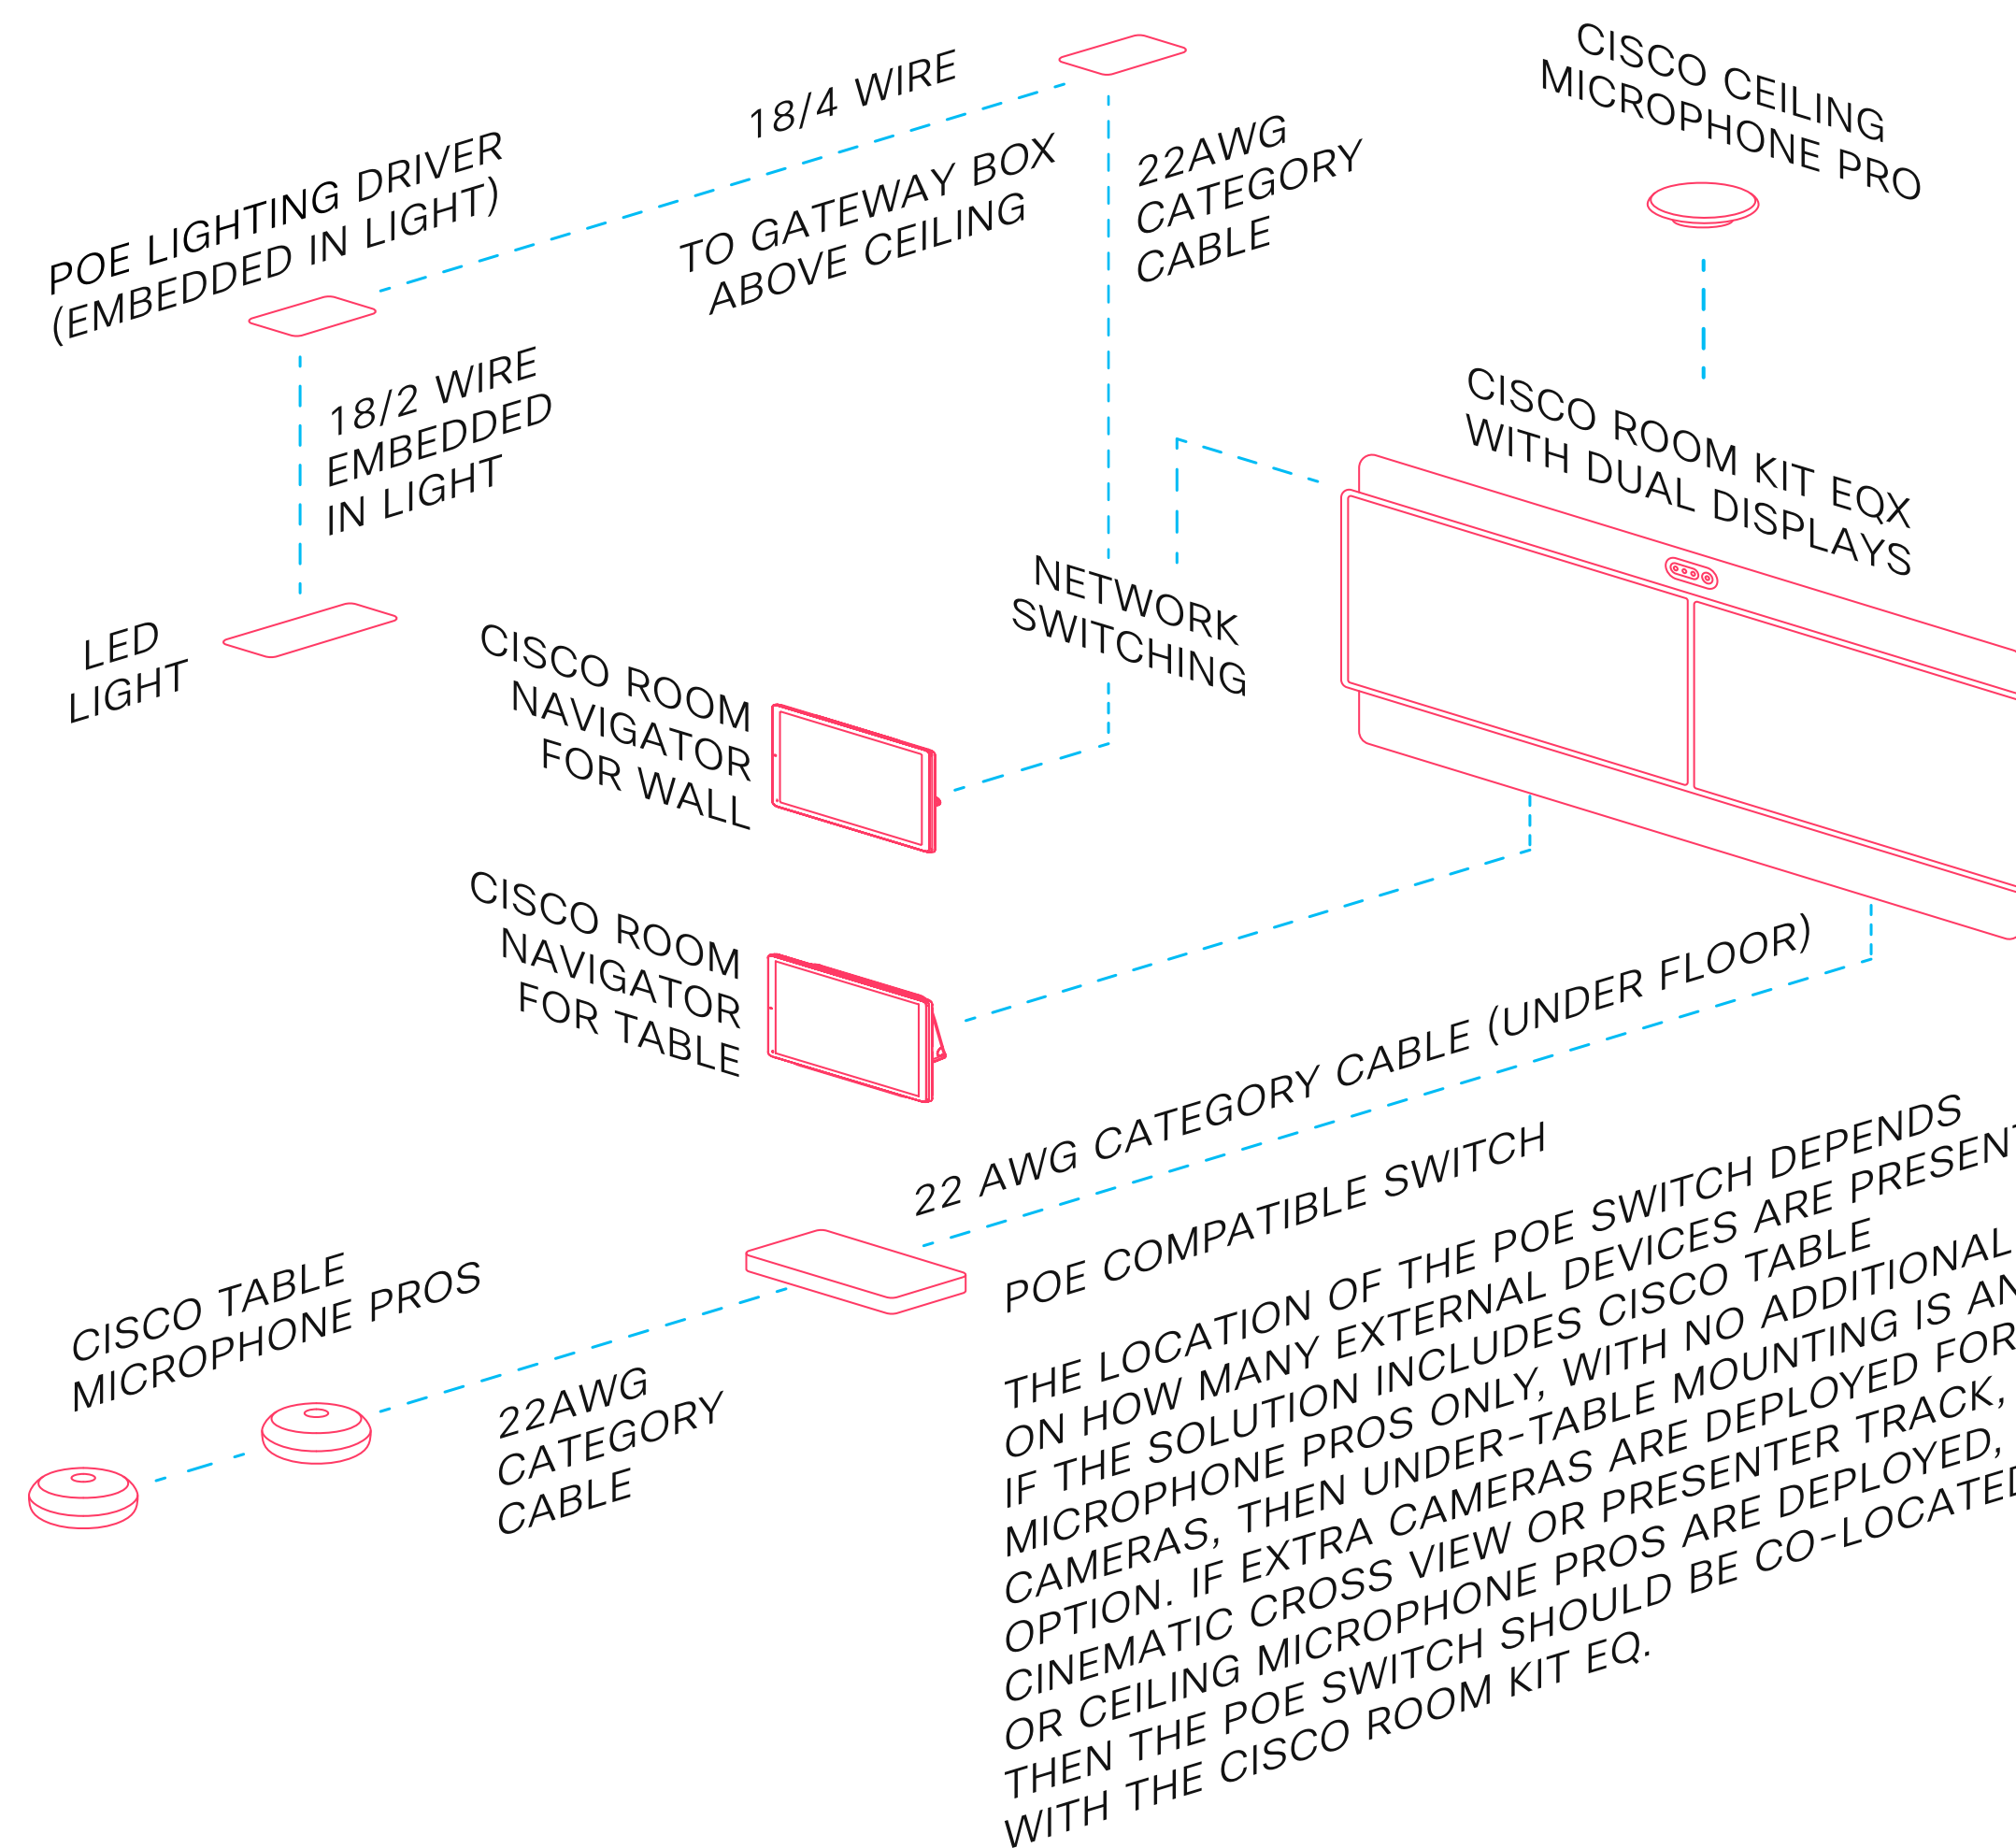

Connectivity View

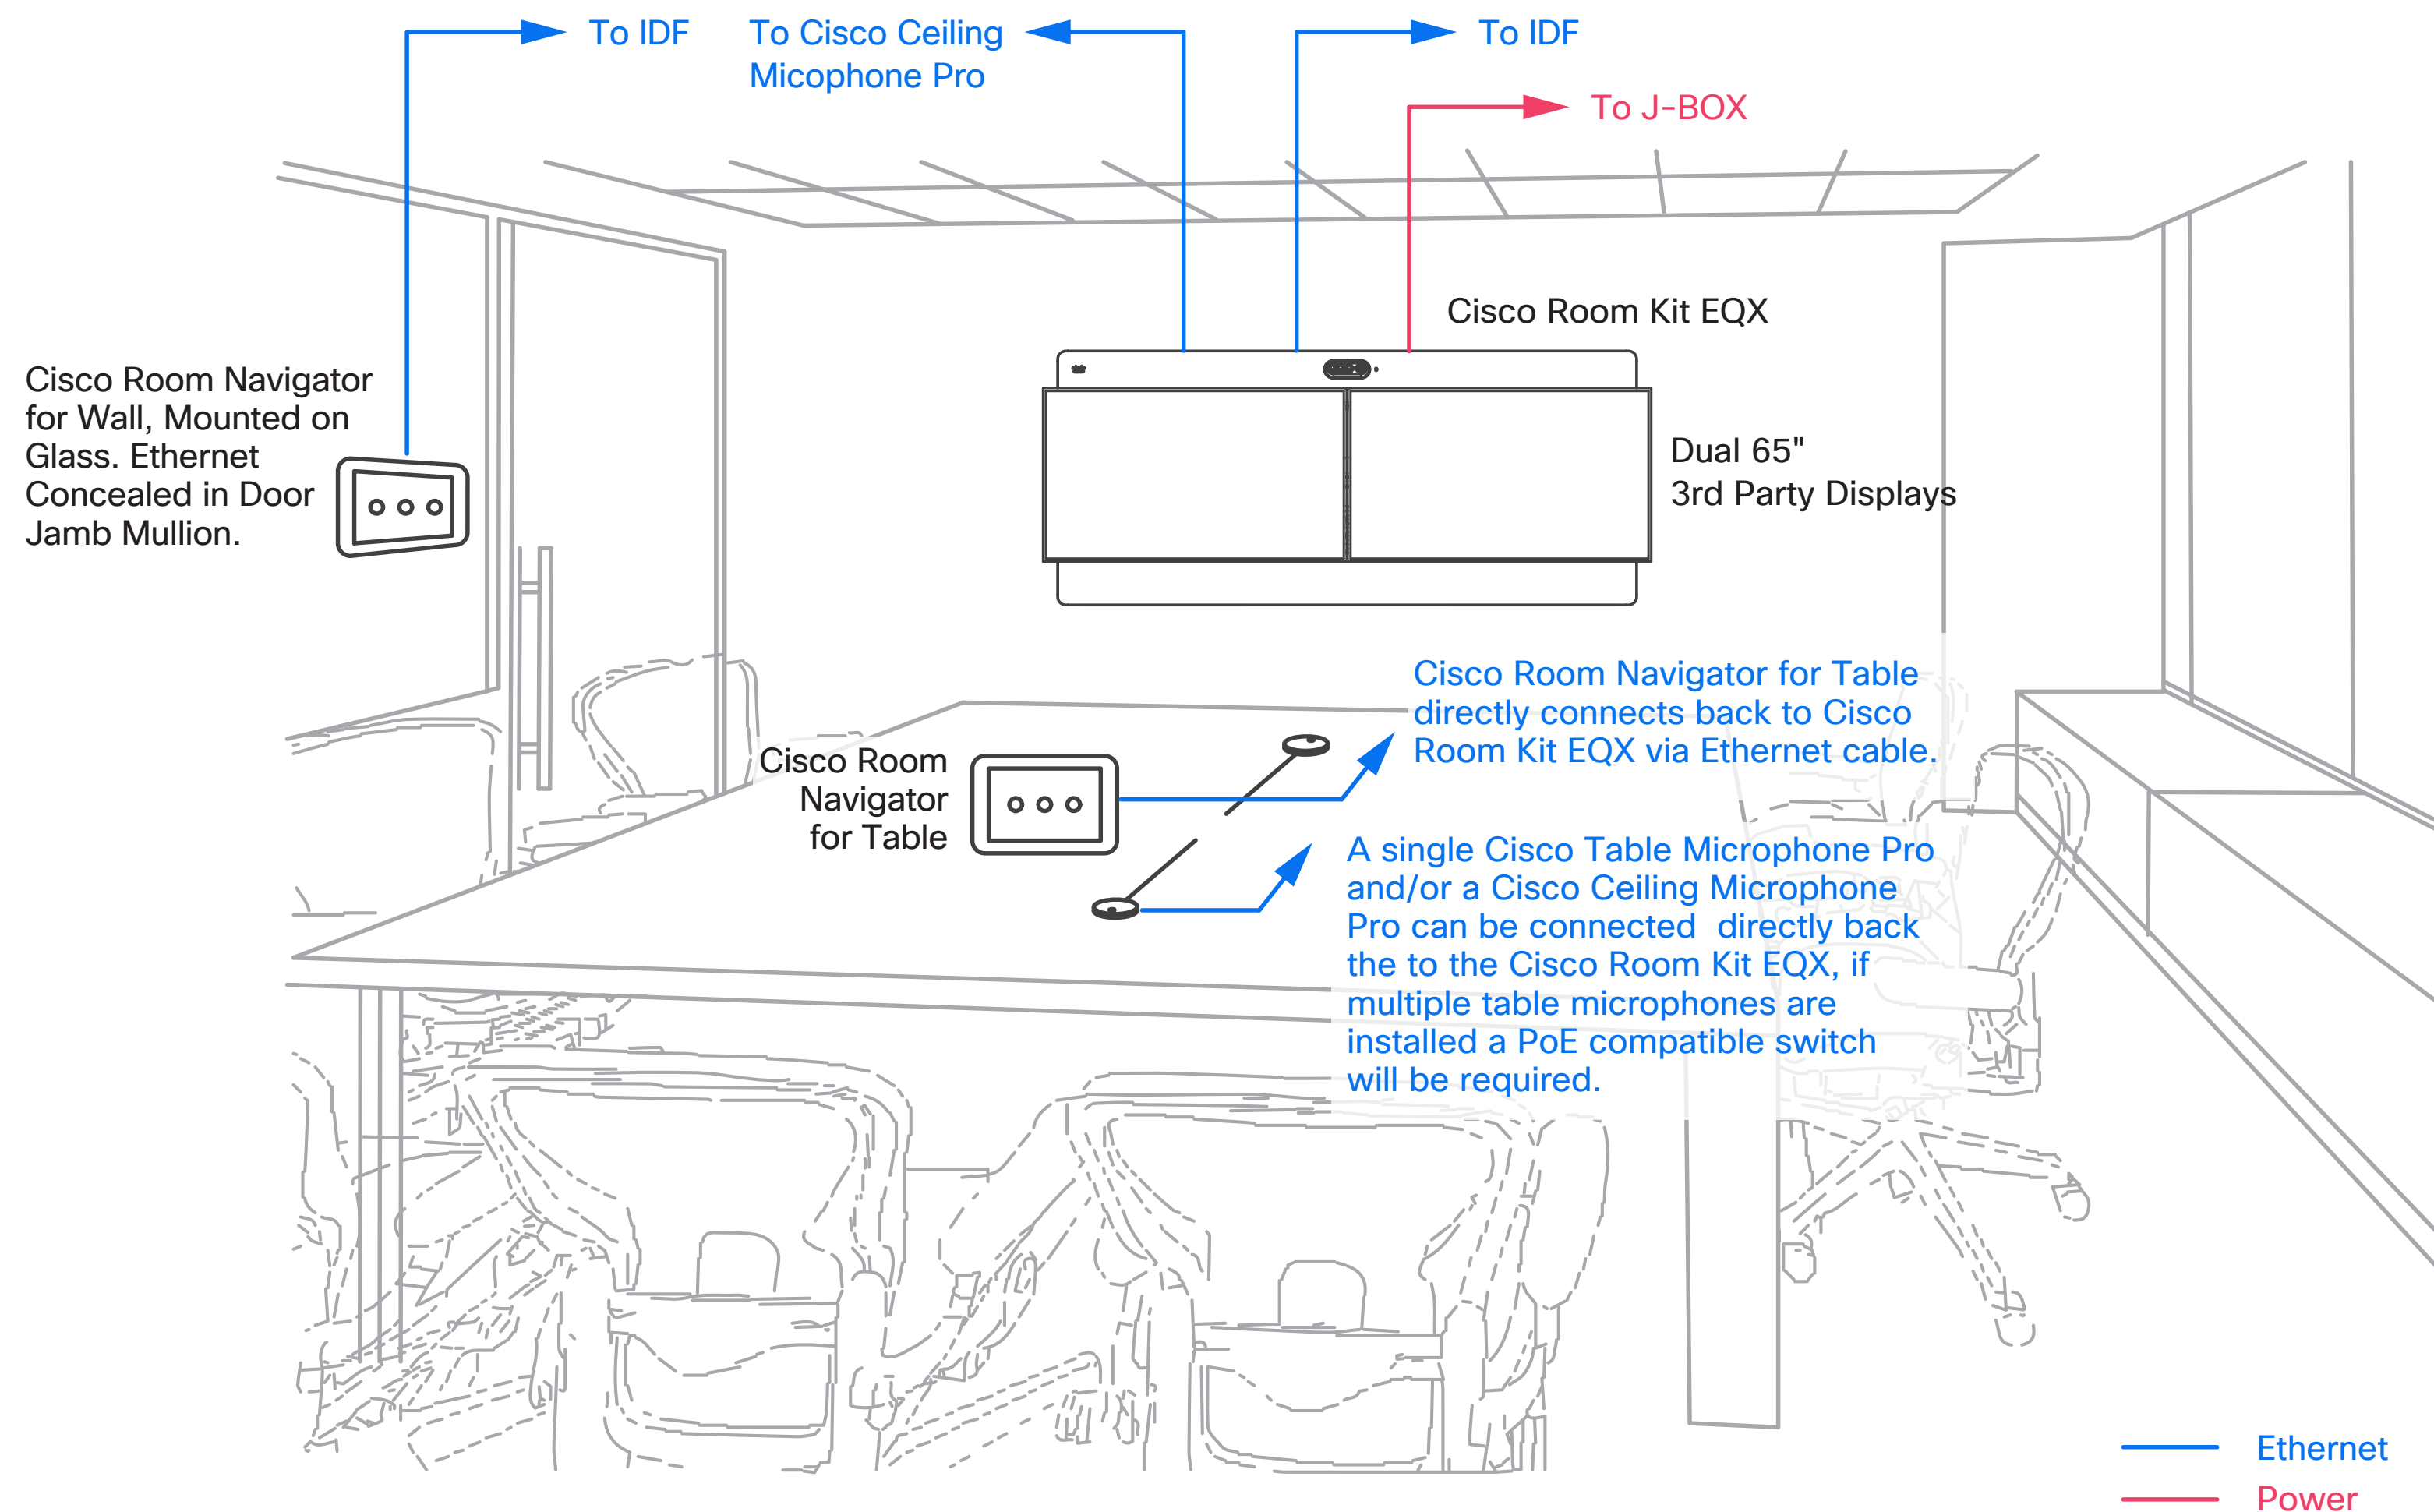

IT/OT Bill of Material

Cisco Products

Cisco Room Kit EQX Option:

- **CS-KIT-EQZX-C-K9.** Cisco Room Kit EQX, Carbon Black
- **CS-KIT-EQX-WMK-C** Cisco Room Kit EQX Wall Mount Carbon Black (Optional)
- **CS-KIT-EQX-WSK-C** Cisco Room Kit EQX Wall Stand Carbon Black (Optional)
- **CS-KIT-EQX-FSK-C** Cisco Room Kit EQX Floor Stand Carbon Black (Optional)
- **CS-MIC-ARRAY-T** Cisco Table Microphone Pro (Qty 2)
- **CS-MIC-CLGPRO** Cisco Ceiling Microphone Pro (Qty 1) - Optional
- **C1200-8FP-2G.** Cisco Catalyst 1200 Series PoE Switch
- **CS-T10-WM-K9=** Cisco Room Navigator for Wall

Non-Cisco peripherals

- Dual 65" Video Displays
- Cisco Wall Mount, Wall Stand, Floor Stand or 3rd party AV-ready credenza


IOT Devices

- IAQ coming from the Cisco Room Navigator, No additional IoT IAQ
- Occupancy sensing is coming from the Cisco Endpoints
- Suggested lighting specifications: 220LPW raw, 140LPW delivered
- Each Medium Collaboration room POE lights being power by 4 ports on the ceiling
- Traditional DC Wall Switch
- Ensure device is not connected to ASHRAE 90.1 outlet

External microphones and speakers

- External microphones are required for the Cisco Room Kit EQX installation. Third-party speakers are not typically required in a space of this size unless environmental conditions warrant their use.

IT/OT Reference Architectures

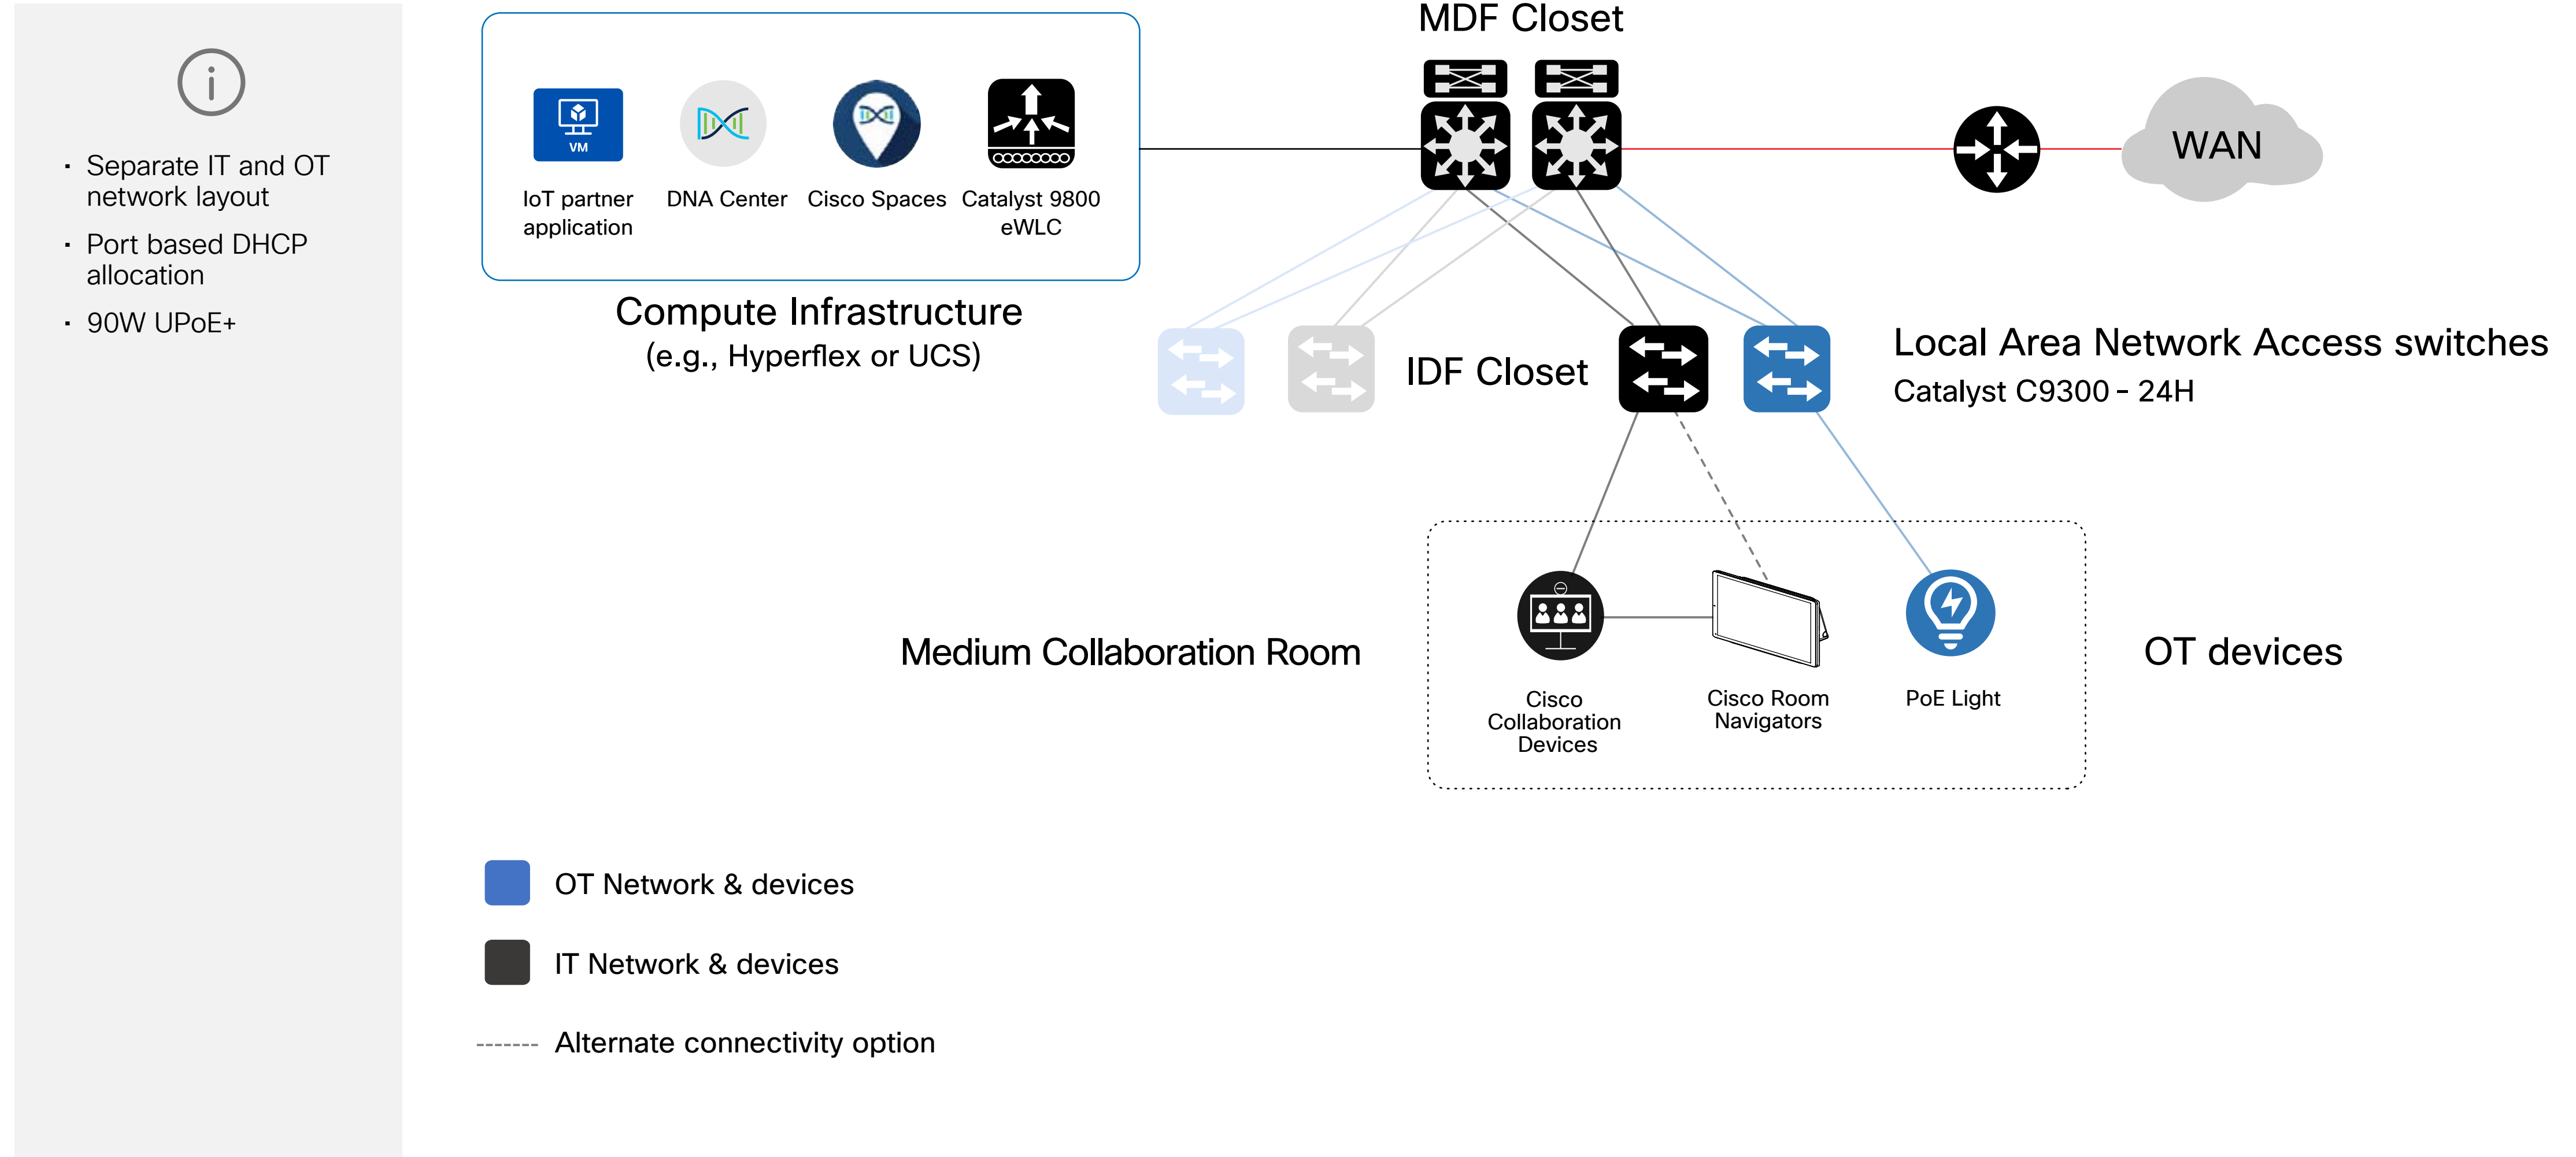

Commissioning-User Acceptance Testing (UAT) Criteria

OT/Space Testing

- Verify manual adjustment of lights, shades and environmental controls are operational from wall controls.
- Confirm lighting occupancy sensor is functional.
- Check any tabletop power and data functionality.
- Verify any smart buildings integrations are working properly.


IT Testing

- Internet connectivity of Cisco Collaboration device.
- Initiate test calls on video endpoint (via Room Navigator, Webex app and voice controls).
- Validate environmental metrics are being displayed on collaboration device and Room Navigator.
- Confirm help videos are loaded.
- Confirm that Room Navigator for Wall is powered and that booking function is working properly. Check that booking function is also available within the room via the Room Navigator for Table.
- Verify the Cisco Smart Workspaces display is showing proper presence status.



Design Files

Design files (Revit, AutoCAD, Sketch up, Rhino3D, etc.) for Cisco's collaboration devices, network switches, wireless access points and Meraki security cameras can be found at www.bimobjects.com, search "Cisco."

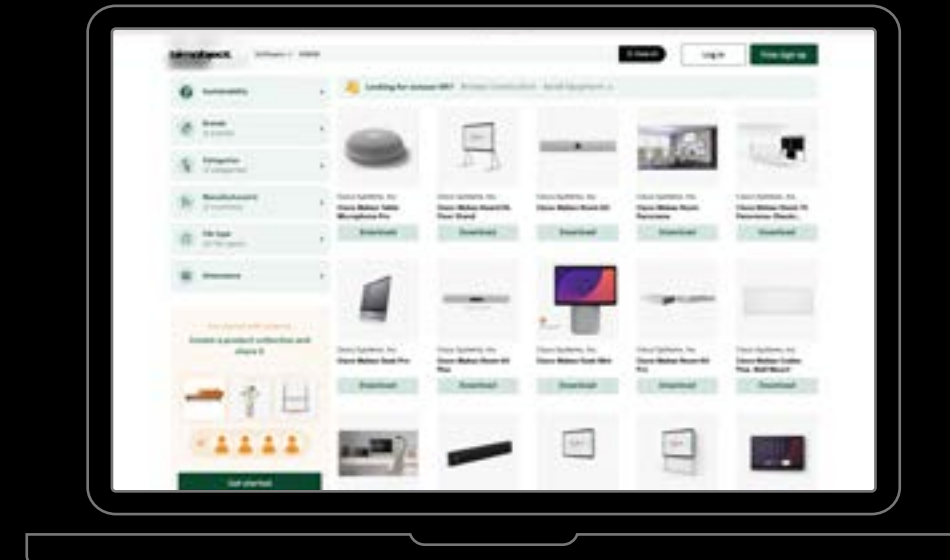

Resources

Guide: Best Practices for Creating Effective Video-enabled Rooms

Cisco Room Bar Pro Data Sheet

Cisco Room Kit EQX Data Sheet

Cisco Room Kit EQX Room Preparations Guide

Cisco Room Kit EQX Installation Guide

© 2025 Cisco and/or its affiliates. All rights reserved. Cisco, the Cisco logo, Webex by Cisco, and Webex are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, see the Trademarks page on the Cisco website. Third-party trademarks mentioned are the property of their respective owners. The use of the word "partner" does not imply a partnership relationship between Cisco and any other company. (2106R)

The intent of this document is to highlight the details, components and partners used in the creation of a Medium Collaboration Room - Dual Display. Any reference herein to any specific commercial products or service does not necessarily constitute or imply its endorsement or recommendation.

