



# E-LINE KD

Data Rack Busbar Systems 160A...1000A

[www.eaelectric.com](http://www.eaelectric.com)

# EAE GROUP IN NUMBERS



## Since 1973

EAE Group of Companies started its journey in the electrical sector in 1973 with the establishment of EAE Elektrik. Since its founding, EAE has grown rapidly, expanding its production and areas of operation by incorporating EAE Lighting in 1983, EAE Machinery in 1996, EAE Electrotechnics in 2004, and EAE Technology in 2009.

EAE carries out its production activities in accordance with ISO 9001 Quality Management, ISO 14001 Environmental Management, ISO 14064-1 Greenhouse Gas Management System, ISO 45001 Occupational Health and Safety Management, ISO 10002 Customer Satisfaction Management, ISO 50001 Energy Management System, and ISO 27001 Information Security Management System standards.



**50+**  
Years Experience



**7**  
Active Factories



**360.000m<sup>2</sup>**  
Enclosed Space



**3**  
R&D Centers



**150+**  
Countries Exported To

# CONTENTS



---

Overview .....	2-5
Technical Characteristics .....	6-7
Order Code System .....	8
Standard Length & Special Length .....	9
Elbows .....	10-11
Feeder Box B10 .....	12
Feeder Box B11 .....	13
Tap-Off Boxes .....	14-17
Installation	
Joint Installation .....	18
Tap-Off Box Installation .....	19-20
Tap-Off Box Horizontal Installation .....	21
Fixing Elements	
Application I : Threaded Rod with Snap-In Fixing Unit .....	22
Application II : TMP Ceiling Support with Snap-In Fixing Unit .....	22
Application III: TMP Ceiling Support and Tray Bracket with Snap-In Fixing Unit .....	23
Ceiling Mounting Fittings .....	24
Tray Supports .....	24
Connection Accessories .....	25
Measuring a Special Length .....	26
Busbar Installation Applications .....	27
Certificates .....	28
Declaration .....	29
Product Overview .....	30


# E-LINE KD


## Overview

To power the mission critical IT infrastructures on the Data Rack Cabinets, EAE offers a highly flexible and reliable Busbar System to meet the "Scalability" challenge in the Data Centers finding the way to Moves, Adds and Changes (MACs).

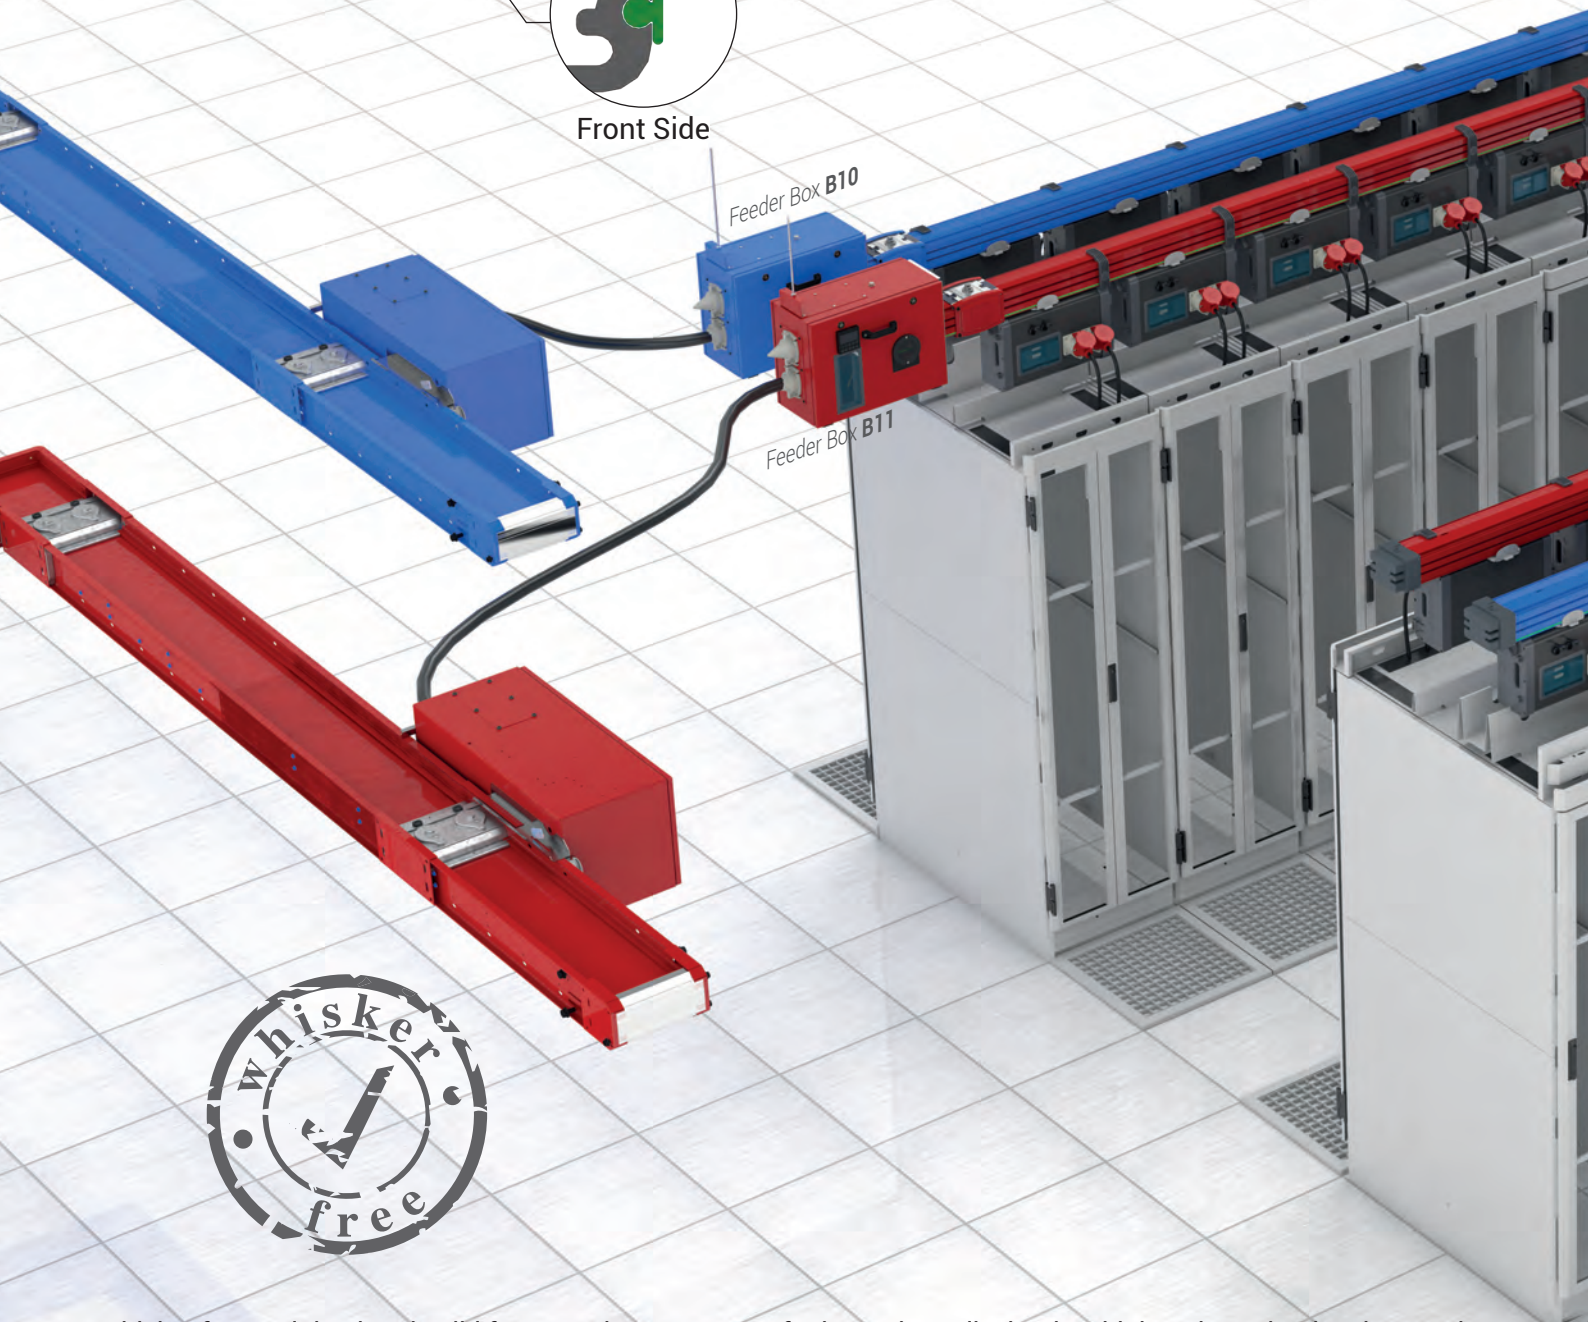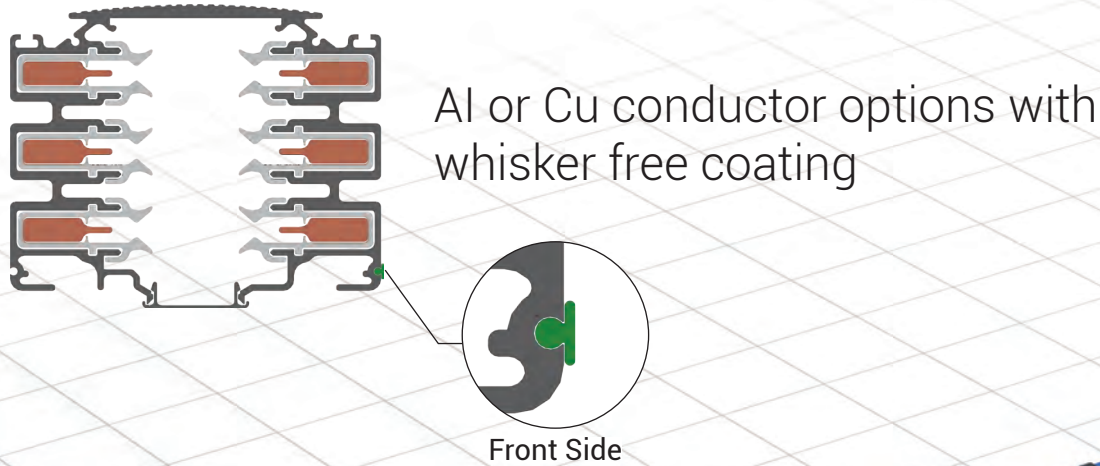


Whisker free and tin plated solid form conductors ensure for better heat dissipation, higher short circuit values and longer operation life while significantly contributing to the "Availability" challenge in the data center environments

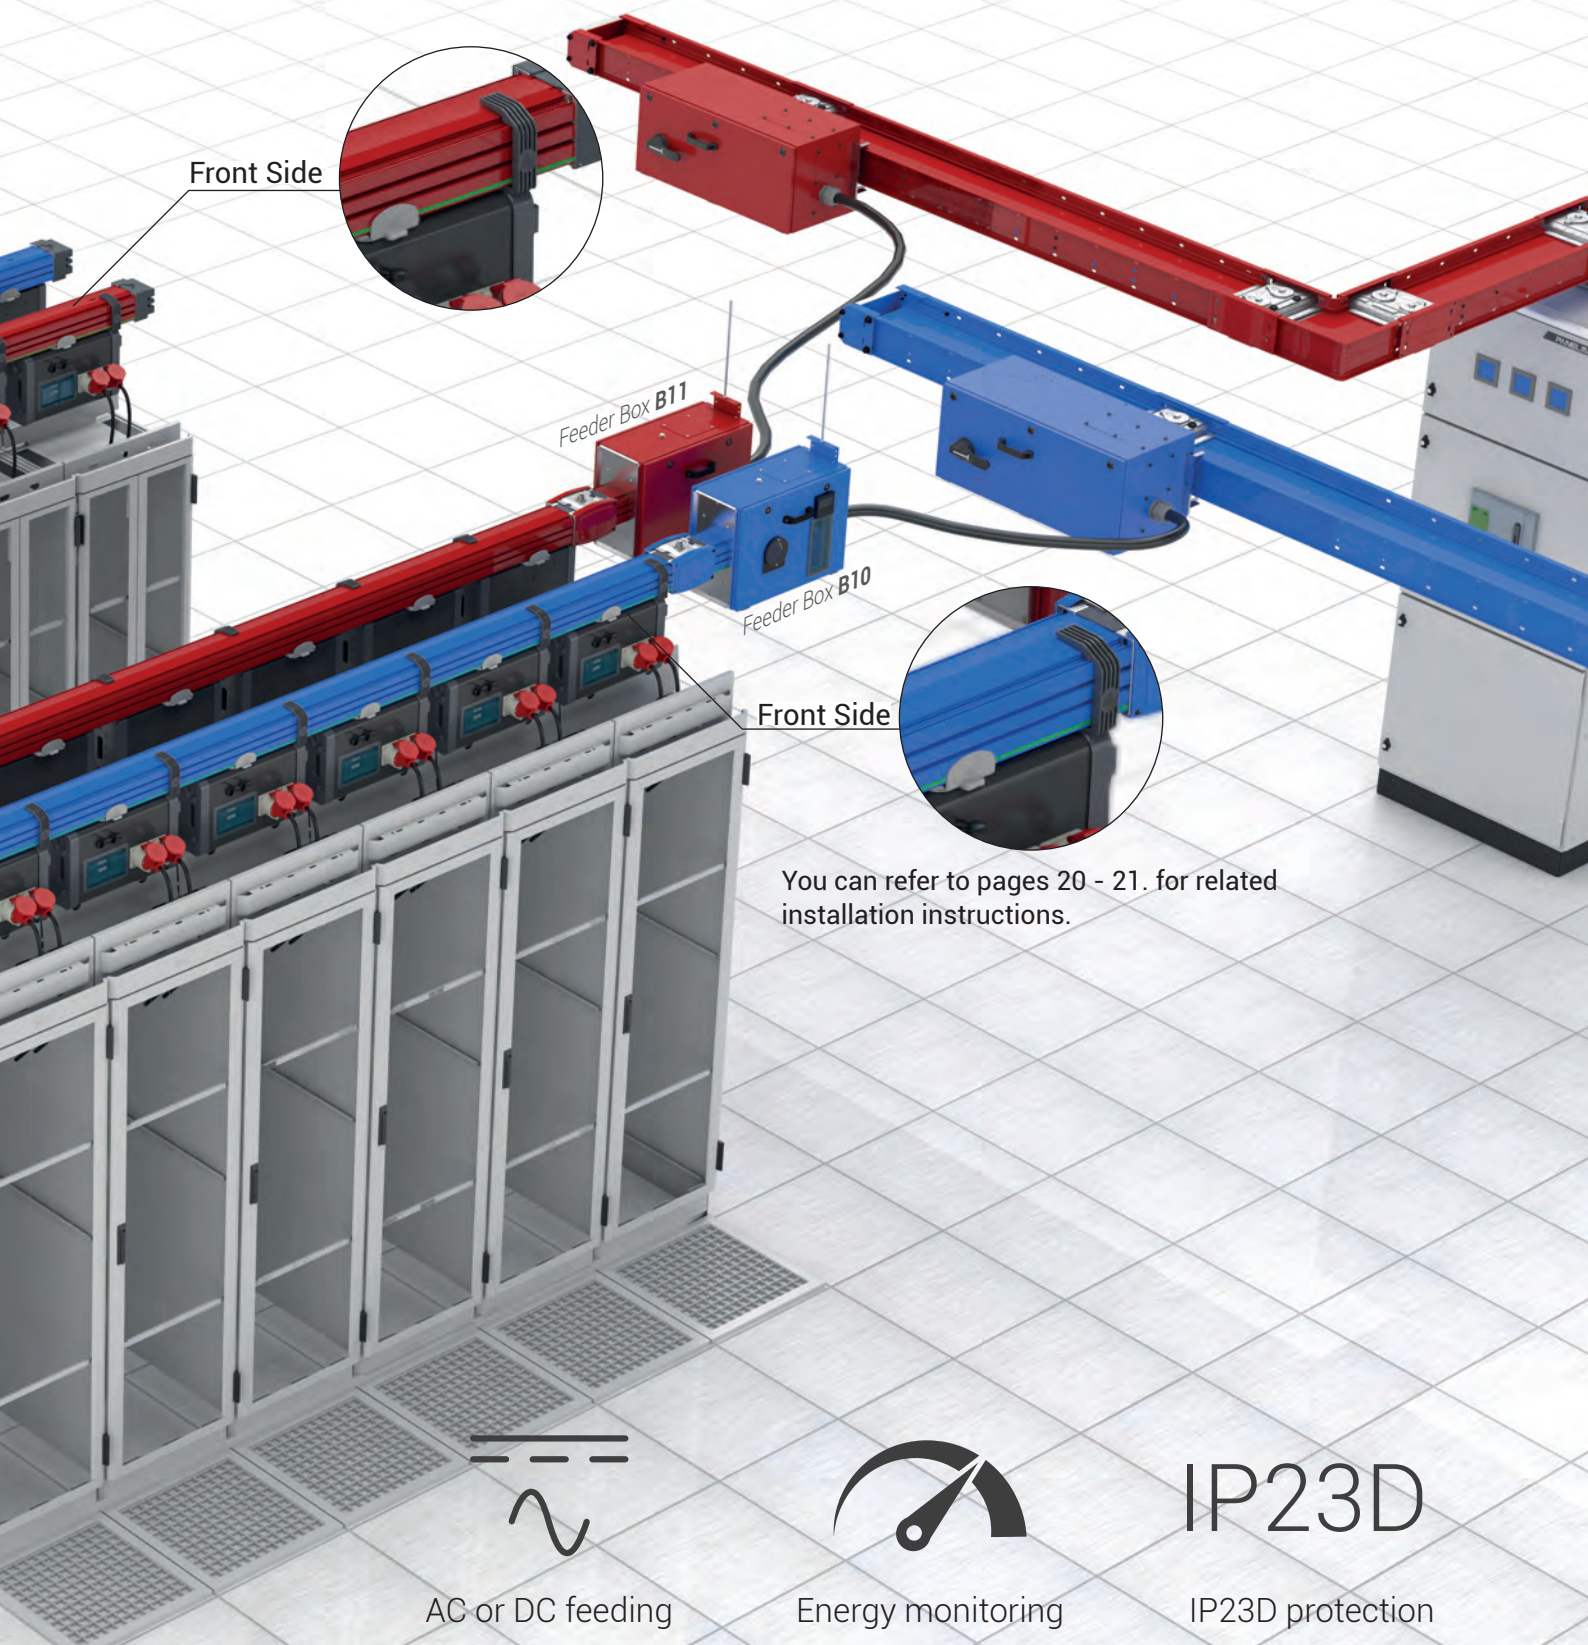

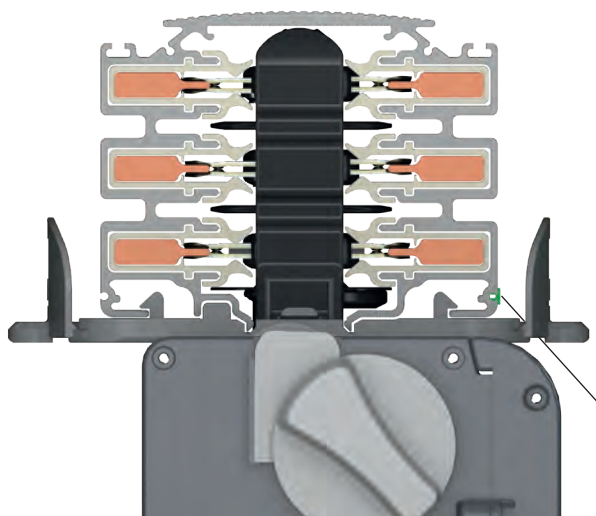


### Plug-n-Play

Easy plug-in Tap-Off Boxes on any point along the busbar, remove and relocate wherever necessary



Front Side

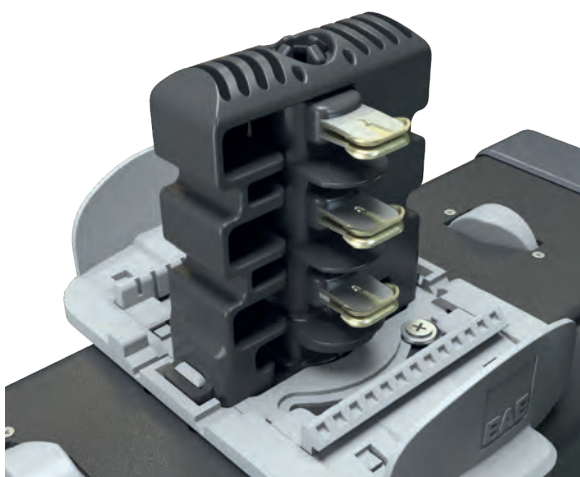


### Tap-Off Contacts

Constant contact pressure with double sided spring system and safe locking mechanism on Tap-Off Box contacts



### Snap-In Suspension Mechanism


Easy and fast structural mounting thanks to Snap-In Fixing Unit

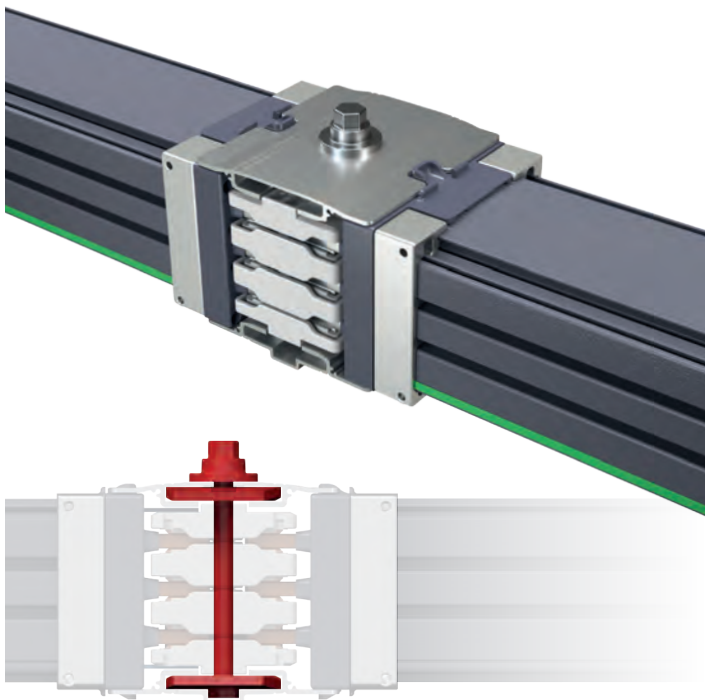

### Joint Mechanism

Safe alignment mechanism with a single bolt monoblock joint for correct installation and operation

Front Side

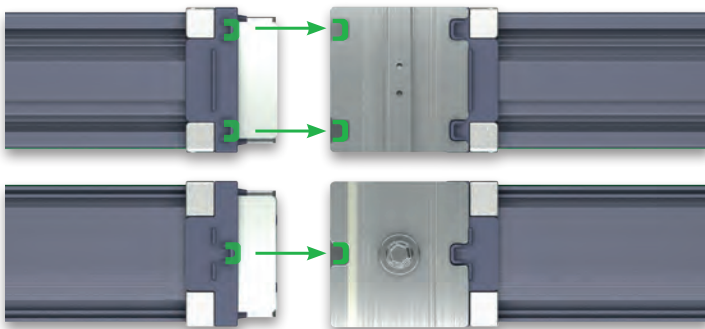

### Easy and Safe Installation

Patented EAE Alignment Solution, ideal alignment of the block joint element and busbar thanks to the alignment guides on the joint area




# E-LINE KD

## Technical Characteristics



<b>Standards</b>	IEC 61439-6, TS EN 61439-6, IEC 61439-1, TS EN 61439-1
<b>Rated Isolation Voltage</b>	Ui: 1000 V at Cat IV
<b>Max. Rated Operational Voltage</b>	Ue: 1000 Vac
<b>Rated Impulse Withstand Voltage</b>	Uimp: 12 kV
<b>Rated Frequency</b>	f: 50 Hz
<b>Pollution Degree</b>	III W
<b>Protection Degree</b>	IP23D
<b>External Mechanical Impacts (IK Code)</b>	IK08
<b>Protection for Safety</b>	Basic Protection (HD 60364-4-41, Clause A1)

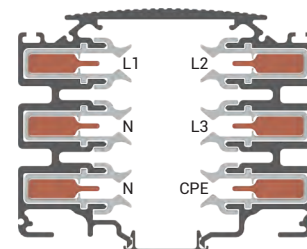


			AI						
RATED CURRENT			$I_n$	A	160	250	400	630	800
BUSBAR CODE					01	02	04	06	08
<b>MEAN PHASE CONDUCTOR CHARACTERISTICS AT RATED CURRENT</b>			ENT $I_n$						
Resistance at a conductor temperature of 20 °C	$R_{20}$	mΩ/m	0,358	0,352	0,234	0,159	0,115		
Average resistance at $I_n$ , thermal balance	R	mΩ/m	0,403	0,426	0,299	0,220	0,156		
Reactance (Independent from Temperature)	X	mΩ/m	0,098	0,100	0,087	0,077	0,064		
Positive and negative sequence impedances at an ambient air temperature of 35 °C	Z	mΩ/m	0,415	0,437	0,311	0,233	0,168		
Positive and negative sequence impedances at a conductor temperature of 20 °C	$Z_{20}$	mΩ/m	0,371	0,366	0,249	0,177	0,131		
Rated Power Loss at $I_n$		W/m	30,1	76,9	140,0	252,4	299,5		
Aluminium Housing Section (Aluminium)		mm <sup>2</sup>	3302	3302	3302	3302	3302		
Busbar Weight (4 Conductors)		kg/m	11,1	11,1	12,3	12,6	16,3		
Busbar Weight (5 Conductors)		kg/m	11,4	11,4	11,8	13,3	17,3		
Busbar Weight (6 Conductors)		kg/m	11,6	11,6	12,3	14,0	18,3		
<b>MEAN FAULT-LOOP CHARACTERISTICS</b>									
<b>ZERO-SEQUENCE IMPEDANCE</b>									
Zero-sequence impedance at a conductor temperature of 20 °C	$Z(0)b20phN$	mΩ/m	1,482	1,482	1,016	0,725	0,538		
Zero-sequence impedance at a conductor temperature of 20 °C (Housing)	$Z(0)b20phPE$	mΩ/m	0,701	0,701	0,350	0,287	0,193		
Zero-sequence impedance at a conductor temperature of 20 °C (Double Notr)	$Z(0)b20ph2N$	mΩ/m	0,988	0,988	0,686	0,510	0,368		
Zero-sequence impedance at a conductor temperature of 20 °C (CPE)	$Z(0)20phCPE$	mΩ/m	1,509	1,509	1,039	0,743	0,518		
Zero-sequence impedance at an ambient temperature of 35 °C	$Z(0)bphN$	mΩ/m	1,659	1,775	1,272	0,968	0,699		
Zero-sequence impedance at an ambient temperature of 35 °C (Housing)	$Z(0)bphPE$	mΩ/m	0,787	0,844	0,441	0,389	0,255		
Zero-sequence impedance at an ambient temperature of 35 °C (Double Notr)	$Z(0)bph2N$	mΩ/m	1,106	1,184	0,856	0,680	0,479		
Zero-sequence impedance at an ambient temperature of 35 °C (CPE)	$Z(0)bphCPE$	mΩ/m	1,689	1,807	1,300	0,989	0,672		
<b>RESISTANCES AND REACTANCES</b>									
Resistance at a conductor temperature of 20 °C	$R_{b20phph}$	mΩ/m	0,722	0,722	0,483	0,346	0,251		
Resistance at a conductor temperature of 20 °C	$R_{b20phN}$	mΩ/m	0,718	0,718	0,479	0,342	0,248		
Resistance at a conductor temperature of 20 °C (Double Notr)	$R_{b20ph2N}$	mΩ/m	0,558	0,558	0,373	0,274	0,192		
Resistance at a conductor temperature of 20 °C (Housing)	$R_{b20phPE}$	mΩ/m	0,473	0,473	0,271	0,207	0,143		
Resistance at a conductor temperature of 20 °C (CPE)	$R_{b20phCPE}$	mΩ/m	0,723	0,723	0,485	0,343	0,236		
Resistance at an ambient air temperature of 35 °C	$R_{bphph}$	mΩ/m	0,815	0,875	0,618	0,479	0,340		
Resistance at an ambient air temperature of 35 °C	$R_{bphN}$	mΩ/m	0,809	0,869	0,613	0,473	0,337		
Resistance at an ambient air temperature of 35 °C (Double Notr)	$R_{bph2N}$	mΩ/m	0,629	0,676	0,478	0,378	0,261		
Resistance at an ambient air temperature of 35 °C (Housing)	$R_{bphPE}$	mΩ/m	0,533	0,572	0,347	0,286	0,194		
Resistance at an ambient air temperature of 35 °C (CPE)	$R_{bphCPE}$	mΩ/m	0,815	0,875	0,620	0,475	0,320		
Reactance (Independent from temperature)	$X_{bphph}$	mΩ/m	0,194	0,194	0,169	0,142	0,118		
Reactance (Independent from temperature)	$X_{bphN}$	mΩ/m	0,199	0,199	0,170	0,140	0,116		
Reactance (Double Notr) (Independent from temperature)	$X_{bph2N}$	mΩ/m	0,152	0,152	0,135	0,114	0,089		
Reactance (Housing) (Independent from temperature)	$X_{bphPE}$	mΩ/m	0,103	0,103	0,086	0,075	0,060		
Reactance (CPE) (Independent from temperature)	$X_{bphCPE}$	mΩ/m	0,199	0,199	0,173	0,145	0,113		
<b>SHORT CIRCUIT RATING</b>									
Rated Short-time Withstand Current (1s) (Three phase)	$I_{cw}$	kA	10	10	20	25	25		
Rated Peak Withstand Current	$I_{pk}$	kA	17	17	40	52,5	52,5		
Rated Short-time Withstand Current for Neutral Conductor(1s)(Single phase)	$I_{cw}$	kA	6	6	12	15	15		
Rated Peak Withstand Current for Neutral Conductor	$I_{pk}$	kA	10,2	10,2	24	30	30		
Rated Short-time Withstand Current for PE (Housing) Conductor(1s)(Single phase) süreli akım)	$I_{cw}$	kA	6	6	12	15	15		
Rated Peak Withstand Current for PE (Housing) Conductor	$I_{pk}$	kA	10,2	10,2	24	30	30		
Rated Short-time Withstand Current for CPE Conductor(1s)(Single phase)	$I_{cw}$	kA	6	6	12	15	15		
Rated Peak Withstand Current for CPE Conductor	$I_{pk}$	kA	10,2	10,2	24	30	30		
Short Circuit Conditional Rating ( KAIC ) at 415V	$I_{cc}$	kA	70	70	70	70	70		


# E-LINE KD

## Technical Characteristics


### Housing Type 1: 160A...630A (Al); 250A...800A (Cu)

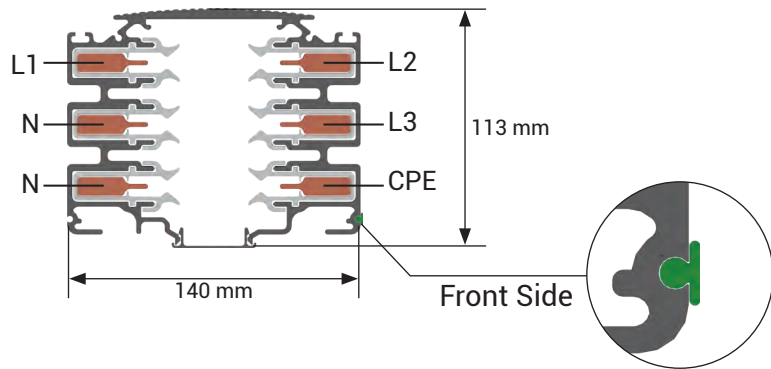

### Housing Type 2: 800A (Al), 1000A (Cu)

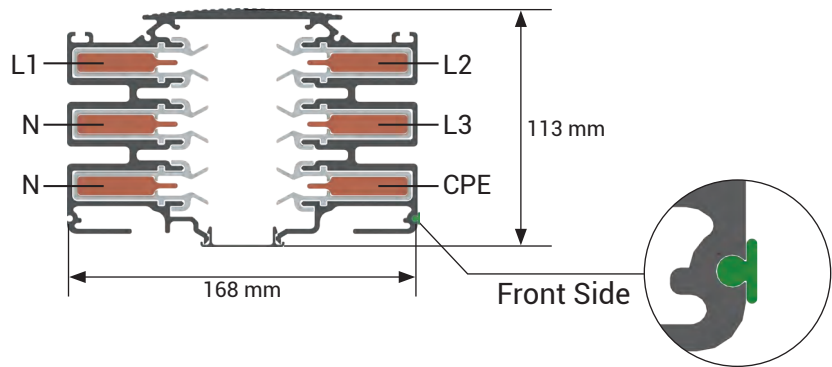


Cu				
250	400	630	800	1000
02	04	06	08	10
0,215	0,211	0,140	0,101	0,080
0,246	0,274	0,198	0,139	0,107
0,100	0,101	0,090	0,077	0,070
0,265	0,292	0,218	0,159	0,127
0,237	0,234	0,167	0,127	0,105
43,7	127,5	228,3	257,0	321,0
3302	3302	3302	3302	3302
13,6	13,6	11,6	14,3	26,43
14,6	14,6	13,0	17,0	29,68
15,3	15,3	14,3	18,3	32,94
0,949	0,949	0,682	0,501	0,363
0,367	0,367	0,292	0,193	0,151
0,649	0,649	0,485	0,358	0,282
0,962	0,962	0,707	0,518	0,374
1,063	1,191	0,902	0,636	0,445
0,416	0,470	0,400	0,256	0,195
0,727	0,814	0,643	0,456	0,348
1,077	1,206	0,934	0,659	0,456
0,433	0,433	0,305	0,222	0,156
0,434	0,434	0,301	0,219	0,153
0,340	0,340	0,241	0,178	0,130
0,261	0,261	0,192	0,136	0,100
0,427	0,427	0,305	0,223	0,155
0,494	0,562	0,430	0,305	0,207
0,496	0,564	0,424	0,301	0,203
0,389	0,442	0,339	0,245	0,173
0,298	0,339	0,271	0,187	0,133
0,488	0,555	0,430	0,307	0,206
0,196	0,196	0,170	0,143	0,112
0,197	0,197	0,170	0,141	0,111
0,157	0,157	0,137	0,113	0,090
0,102	0,102	0,088	0,072	0,054
0,214	0,214	0,174	0,146	0,115
18	18	25	40	40
36	36	53	84	84
10,8	10,8	15	24	24
21,6	21,6	30	50,4	50,4
10,8	10,8	15	24	24
21,6	21,6	30	50,4	50,4
10,8	10,8	15	24	24
21,6	21,6	30	50,4	50,4
70	70	70	70	70

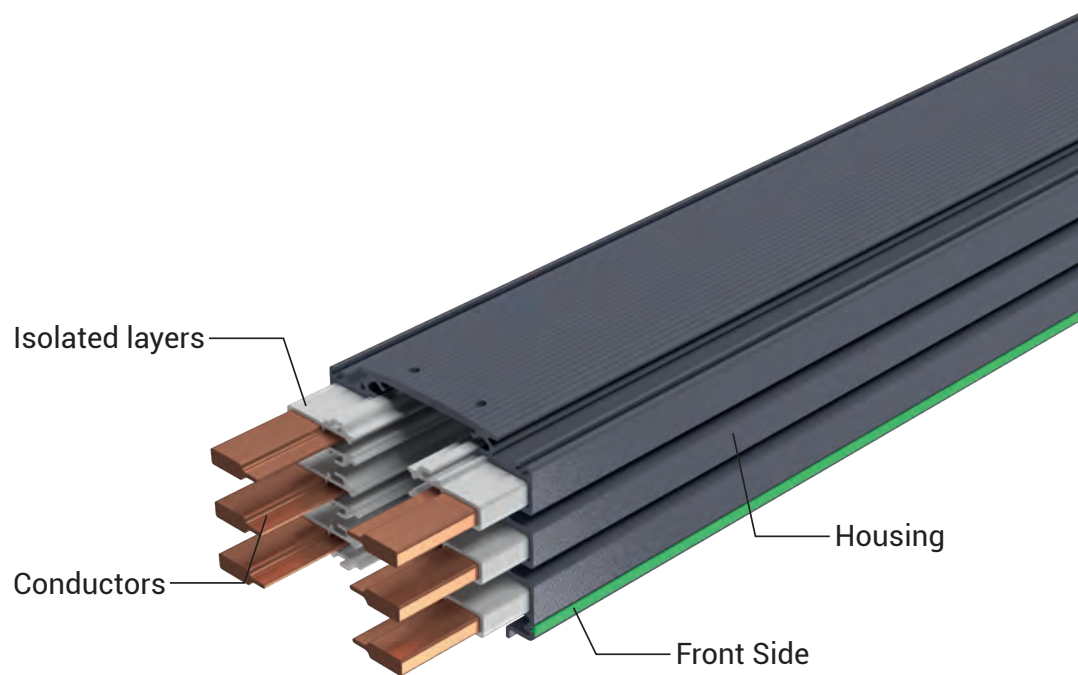

# E-LINE KD

## Order Code System

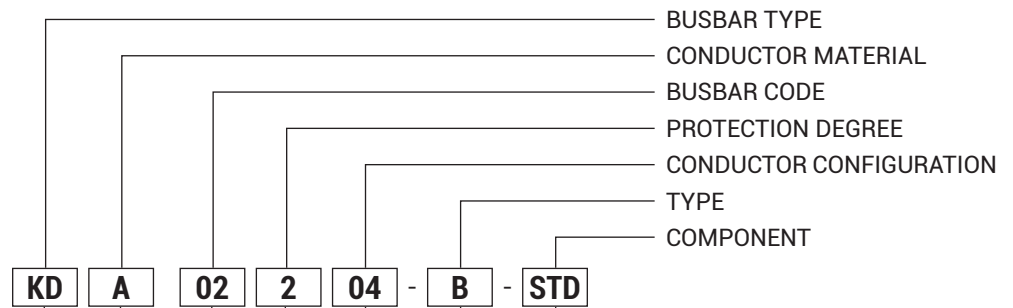

Busbar Type

Aluminium (Al) **A**  
Copper (Cu) **C**


Al Conductor		Cu Conductor	
Rated Current	Busbar Code	Rated Current	Busbar Code
160	01	-	-
250	02	250	02
400	04	400	04
630	06	630	06
800	08	800	08
-	-	1000	10

IP23D

Standard Length	STD
Special Length	X
Feeder Box	B10
Feeder Box	B11
End Closer	S
Left Elbow	L
Right Elbow	R
Central Feeder	TO
Left Side Feeder	TYL
Right Side Feeder	TYR

Type	
Painted	B

Conductor Configuration								
Conductors	Code	L1	L2	L3	N1	N2	CPE	PE (Housing)
4 Conductors	04	✓	✓	✓	✓			✓
5 Conductors (CPE)	05	✓	✓	✓	✓		✓	✓
6 Conductors (CPE)	06	✓	✓	✓	✓	✓	✓	✓

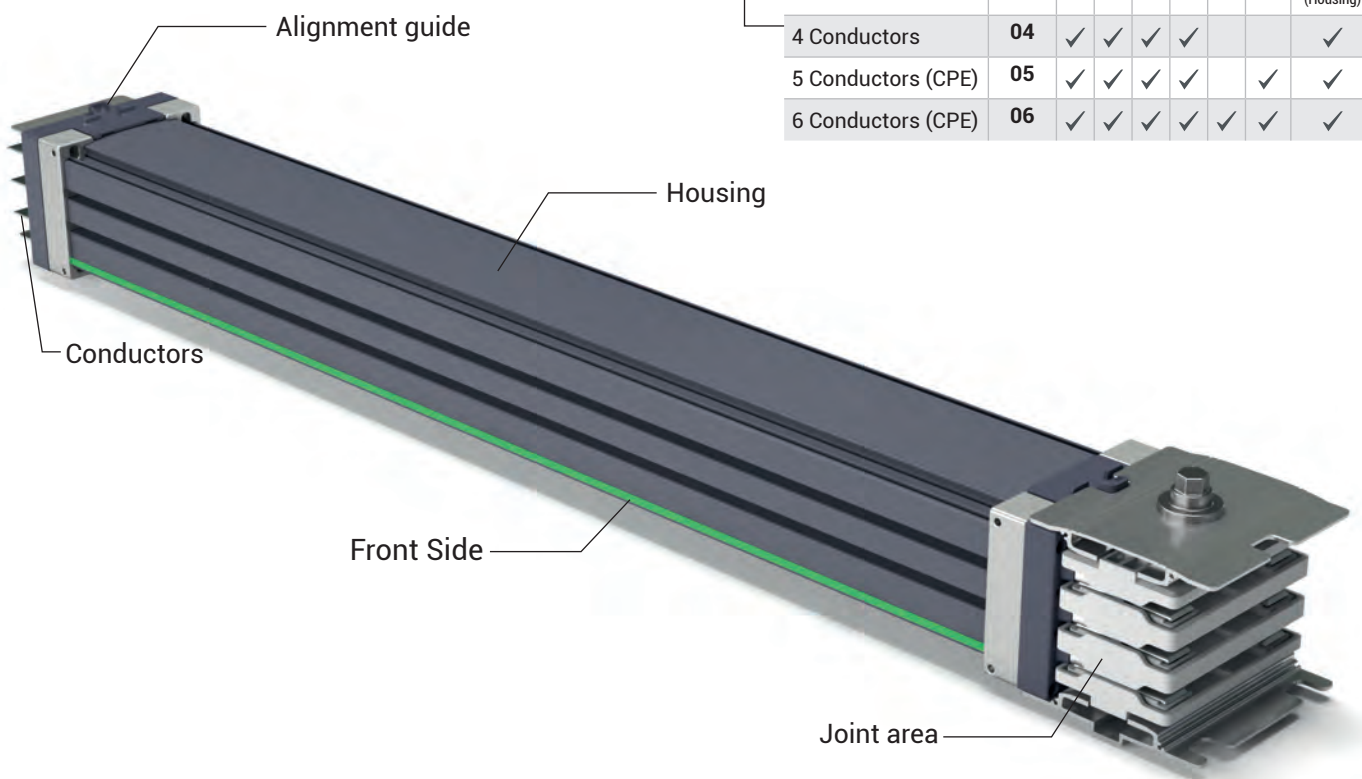


# E-LINE KD

## Standard Straight Length



### Standard Length

Sample Order:  
250 A, Aluminium,  
IP23D, 6 Conductors,  
Painted  
**KDA 02206-B-STD**

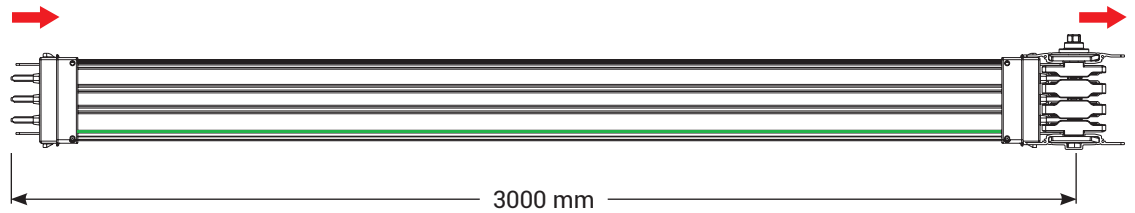

**Housing Type 1:** 160A...630A (Al); 250A...800A (Cu)  
**Housing Type 2:** 1000A (Cu)


### Special Length

Sample Order:  
250 A, Aluminium,  
IP23D, 6 Conductors,  
Painted  
**KDA 02206-B-X**

X=1500 mm.

**Note:**



Minimum Length (X)=650 mm.

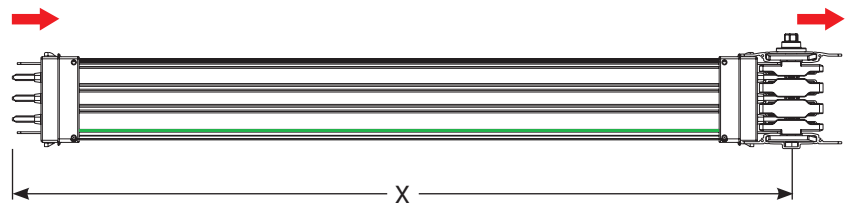

**Housing Type 1:** 160A...630A (Al); 250A...800A (Cu)  
**Housing Type 2:** 1000A (Cu)



### Aluminium Closure Panel

Standard length= 2800 mm

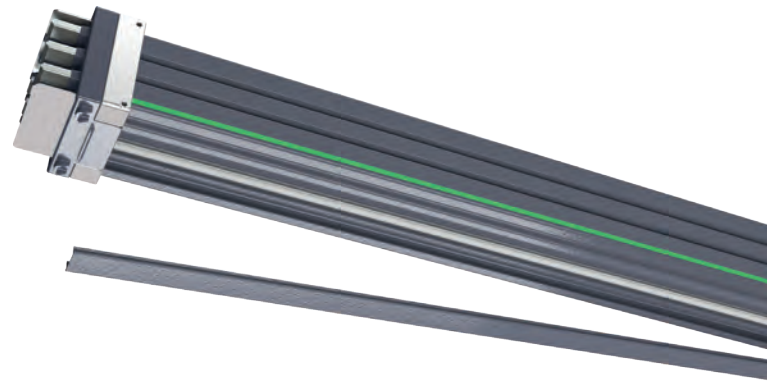
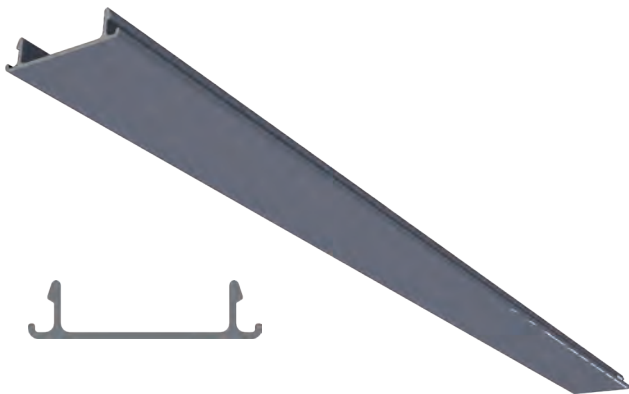


### End Closer (S)



It is used to close the end of the busbar run and included on all standard and special length of busbars.

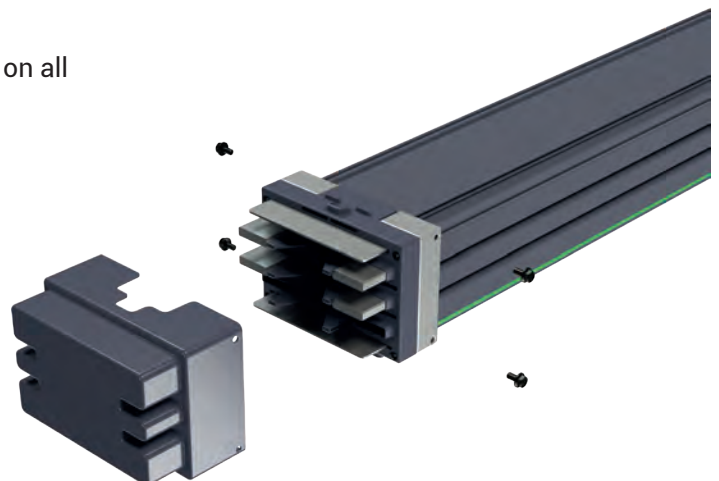

### Left Elbow (L)

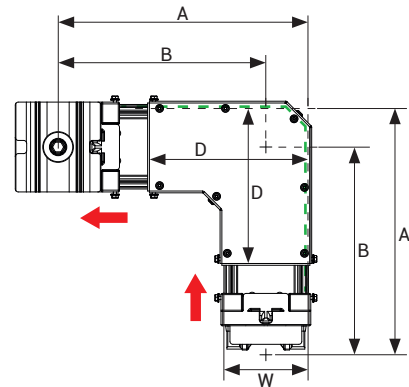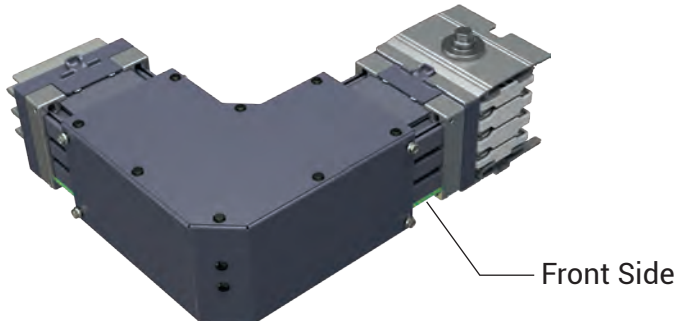

### Right Elbow (R)

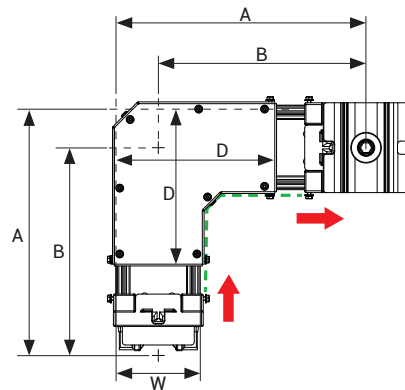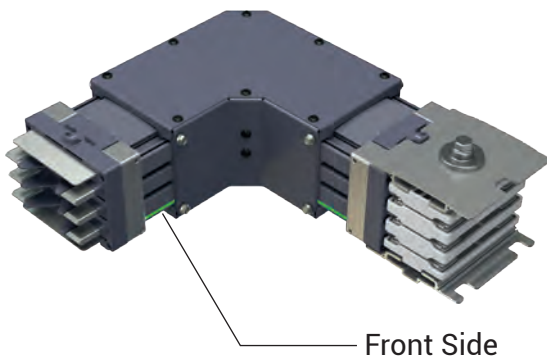

**⚠ Housing Type 1: 160A...630A (Al); 250A...800A (Cu)**  
 Note: Please consider the conductor type for your project. There is no separate order code, one code covers each ampacity.

**⚠ Housing Type 2: 1000A (Cu)**  
 Note: Please consider the conductor type for your project. There is no separate order code, one code covers each ampacity.

	A (mm)	B (mm)	D (mm)	W (mm)
Housing Type 1	417	347	274	140
Housing Type 2	431	347	288	168



**⚠** Tap-off boxes cannot be installed on elbows.

# E-LINE KD



## Standard Straight Length





### Central Feeder (TO)

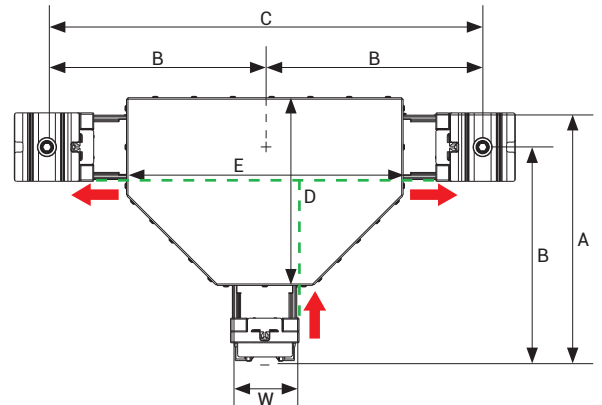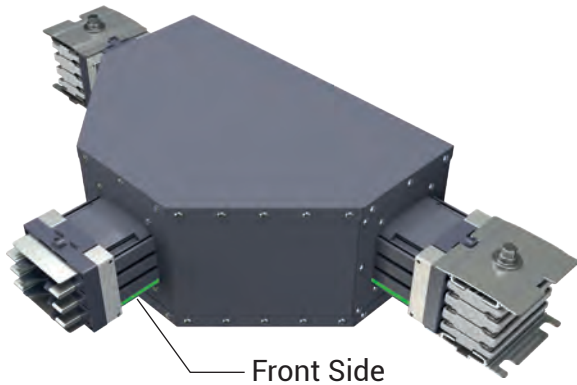

### Left Side Feeder (TYL)

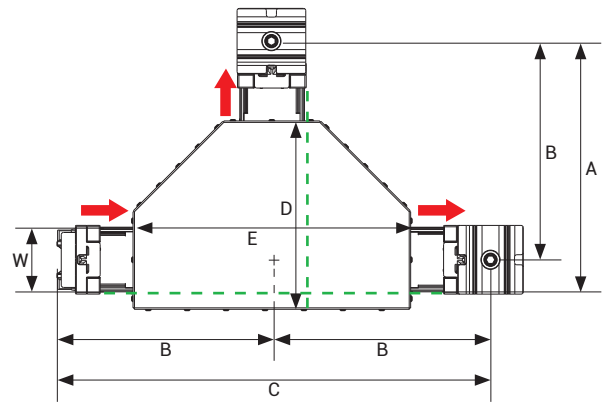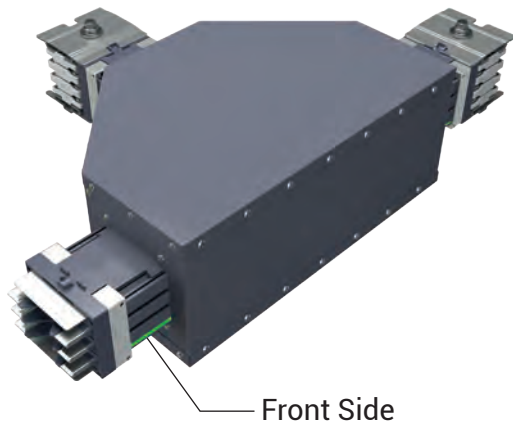

### Right Side Feeder (TYR)

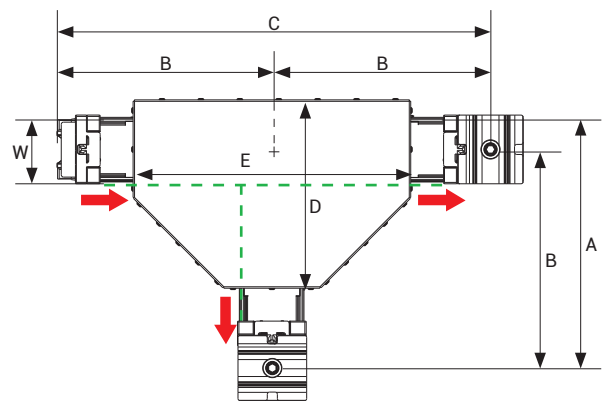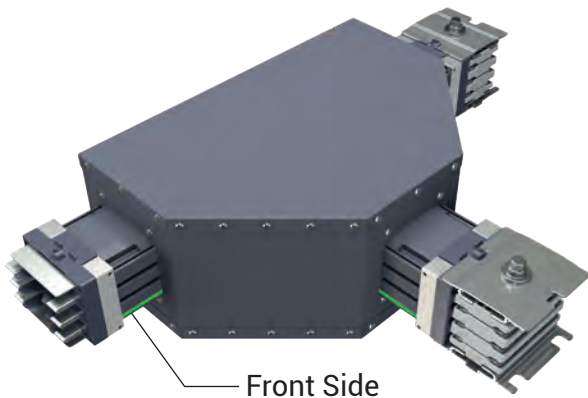

- Housing Type 1: 160A...630A (Al); 250A...800A (Cu)**  
Note: Please consider the conductor type for your project. There is no separate order code, one code covers each ampacity.
- Housing Type 2: 1000A (Cu)**  
Note: Please consider the conductor type for your project. There is no separate order code, one code covers each ampacity.

	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	W (mm)
<b>Housing Type 1</b>	548	478	956	411	606	140
<b>Housing Type 2</b>	562	478	956	425	606	168

Tap-off boxes cannot be installed on elbows.

# E-LINE KD

## Feeder Boxes 160A...630A (Al), 250A...1000A (Cu)





### Feeder Box (B10)



Orientation : Right → Left

The busduct runs from the right side to the left side when connected to the End Feed Box.

\* Support the feeder units from corresponding junction points.

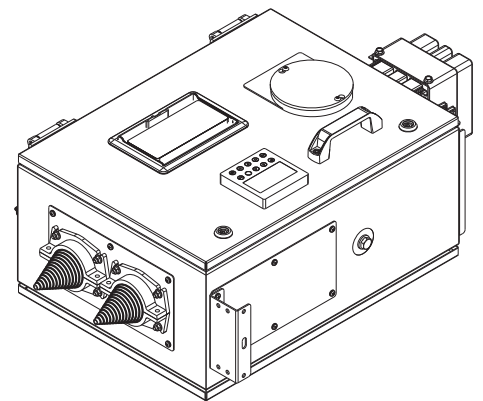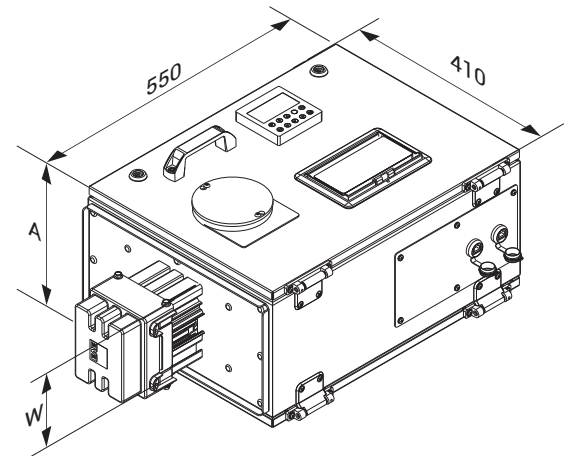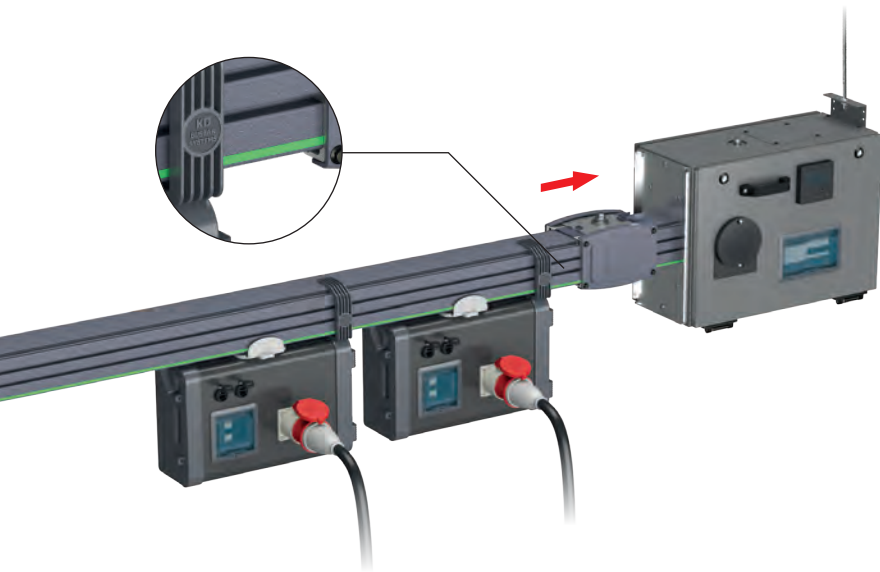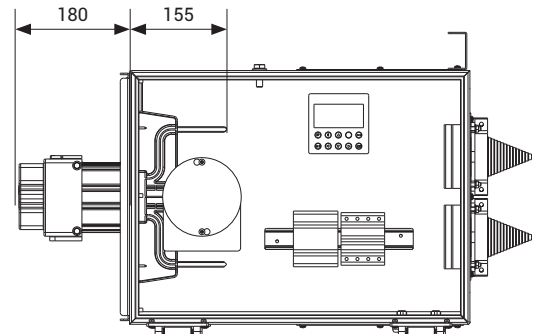

**⚠ Housing Type 1: 160A...630A (Al); 250A...800A (Cu)**  
 Note: Please consider the conductor type for your project. There is no separate order code, one code covers each ampacity.

**⚠ Housing Type 2: 1000A (Cu)**  
 Note: Please consider the conductor type for your project. There is no separate order code, one code covers each ampacity.

	A (mm)	W (mm)
Housing Type 1	260	140
Housing Type 2	288	168

- Hinged and easily removable cover
- IR window (optional)
- Energy Monitoring (optional)

**⚠** Tap-off boxes cannot be installed on feeder boxes.

- \* Please contact us for special feeder boxes.
- \* All dimensions in mm.

# E-LINE KD

## Feeder Boxes 160A...630A (Al), 250A...1000A (Cu)





### Feeder Box (B11)



Orientation : Left → Right

The busduct runs from the left side to the right side when connected to the End Feed Box.

\* Support the feeder units from corresponding junction points.

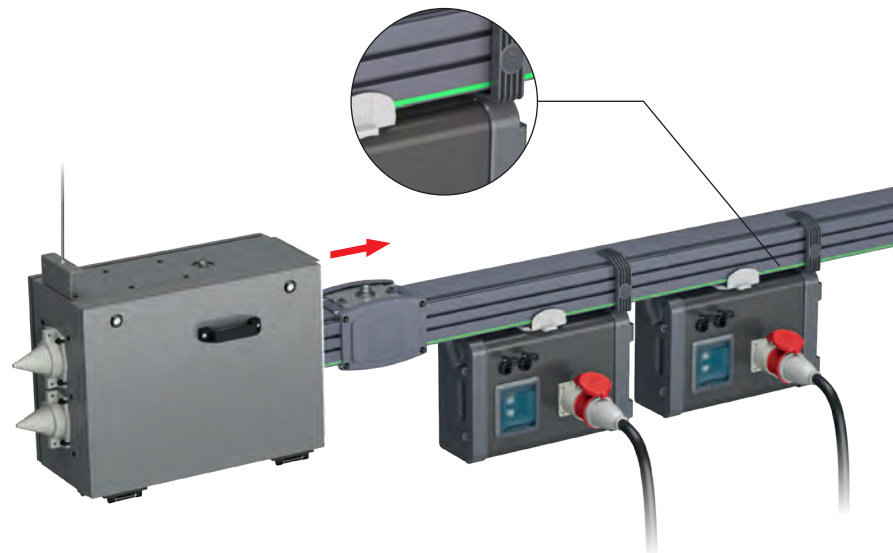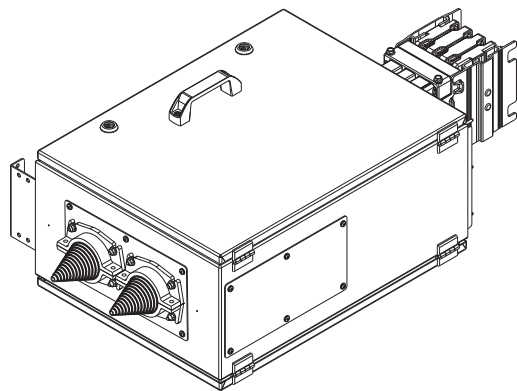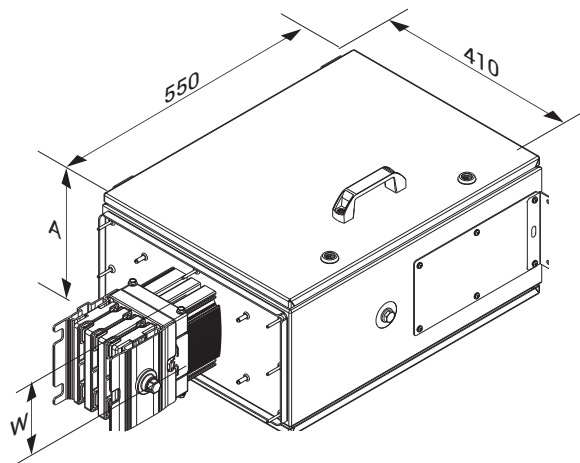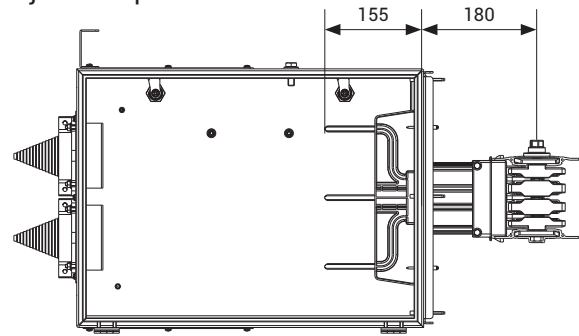

**Housing Type 1: 160A...630A (Al); 250A...800A (Cu)**  
 Note: Please consider the conductor type for your project.  
 There is no separate order code, one code covers each ampacity.



**Housing Type 2: 1000A (Cu)**  
 Note: Please consider the conductor type for your project.  
 There is no separate order code, one code covers each ampacity.

	A (mm)	W (mm)
Housing Type 1	260	140
Housing Type 2	288	168

- Hinged and easily removable cover
- IR window (optional)
- Energy Monitoring (optional)



Tap-off boxes cannot be installed on feeder boxes.

- \* Please contact us for special feeder boxes.
- \* All dimensions in mm.


# E-LINE KD

## Tap-Off Boxes




### KDP Terminal Box (80A)

#### Type 01

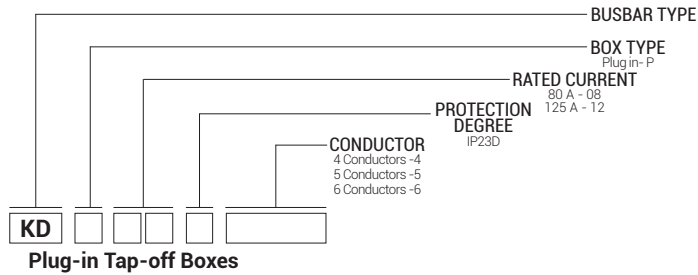


KD	P	1	2	4	KDP	0824
KD	P	1	2	5	KDP	0825
KD	P	1	2	6	KDP	0826

Sample Order:  
 Plug-in / 125 A / IP-23D  
 5 Conductors  
 KDP 1225

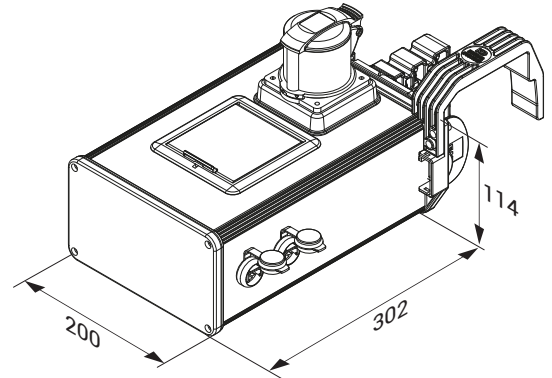


#### Type 02

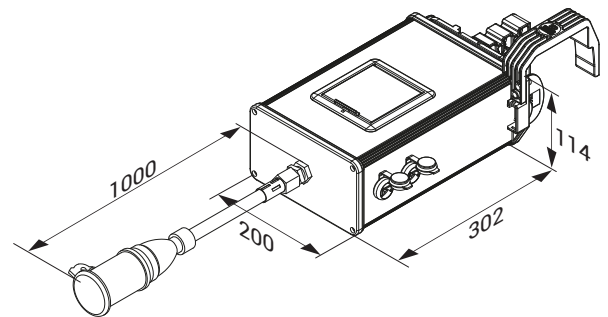

16A/32A Single & Three Phase Circuit Breaker  
 16A/32A, 3P & 5P Socket / Connector with cable  
 RJ45 Ports (Optional for Energy Metering)

#### Type 03

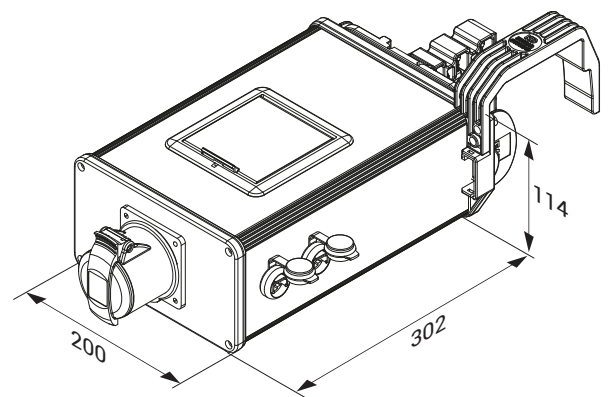

\* Please contact us for special boxes.  
 \* All dimensions in mm.

The KD tap off box conductors number should be selected based on the number of conductors defined by the busbar project design.


# E-LINE KD

## Tap-Off Boxes




### KDP Single Socket Box (125A)

16A/32A Single & Three Phase Circuit Breaker  
63A Three Phase Circuit Breaker  
16A/32A Single & Three Phase Socket  
63A Three Phase Socket  
RJ45 Ports (Optional for Energy Metering)

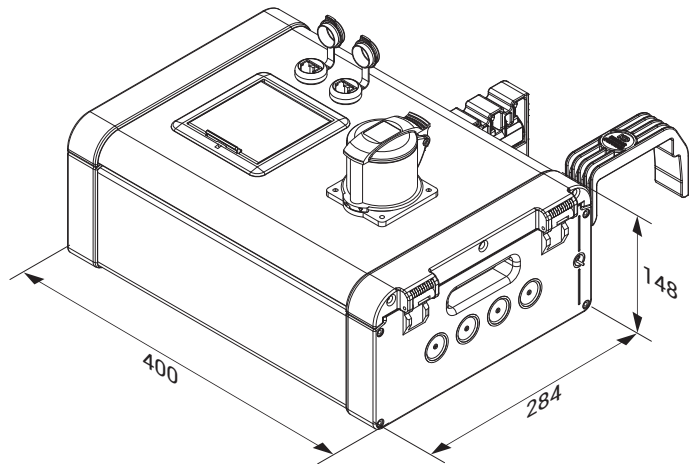

### KDP Double Socket Box (125A)

16A/32A Single & Three Phase Circuit Breakers  
16A/32A Single & Three Phase Sockets  
RJ45 Ports (Optional for Energy Metering)

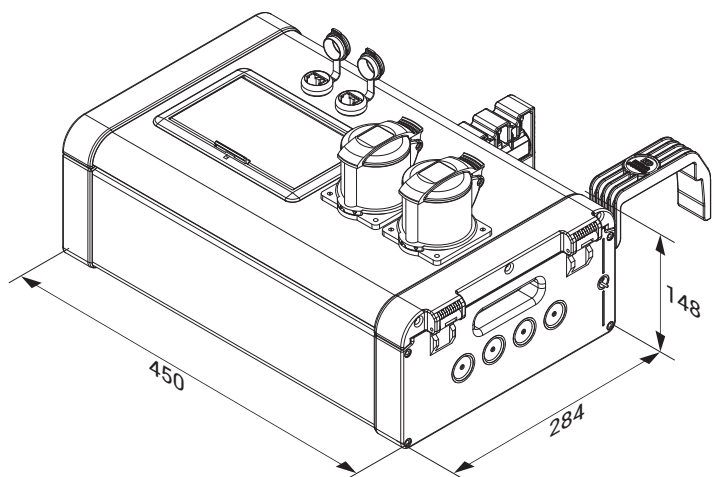


\* Please contact us for special boxes.  
\* All dimensions in mm.



The KD tap off box conductors number should be selected based on the number of conductors defined by the busbar project design.



**KDP Energy Analyzer Box (125A)**

- 16A/32A Single & Three Phase Circuit Breakers
- 63A Three Phase Circuit Breaker
- 16A/32A Single & Three Phase Socket
- 63A Three Phase Socket
- Energy Analyzer with Display
- RJ45 Ports

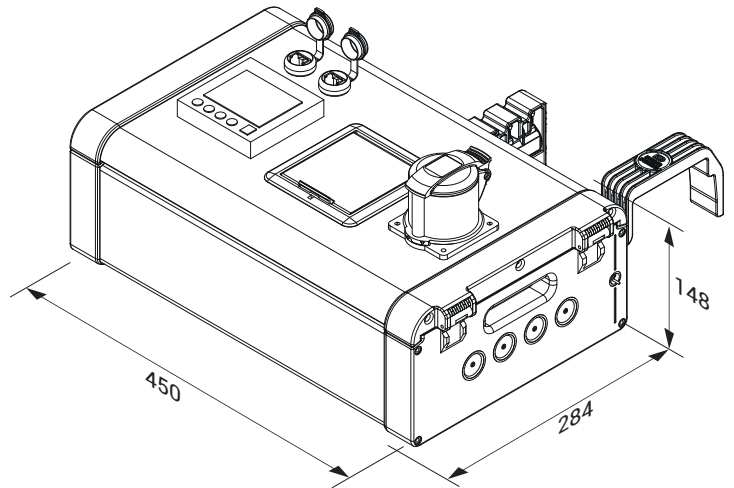

**KDP Empty Box (125A)**

Configurable up to 12 modules with RJ45 ports with optional cable gland feed.

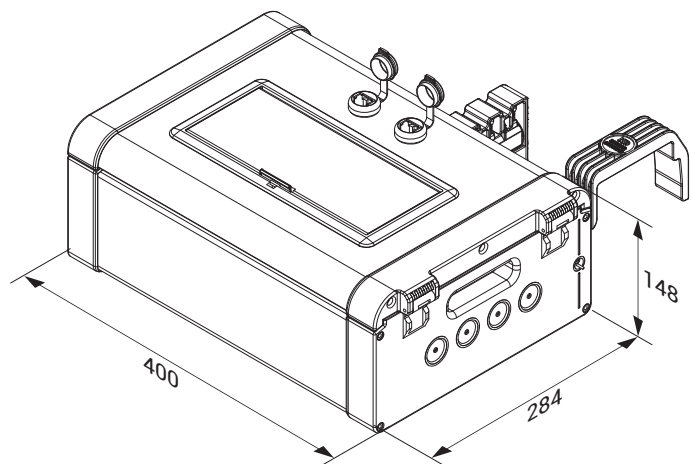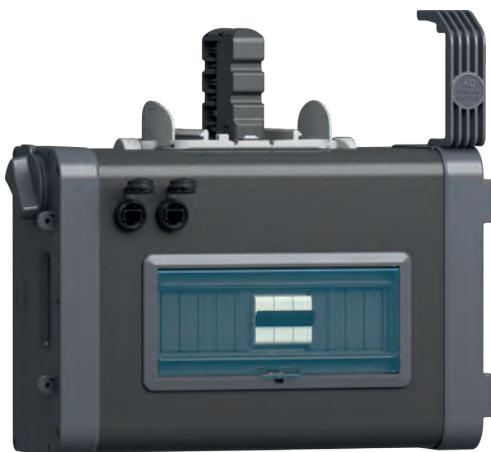


- \* Please contact us for special boxes.
- \* All dimensions in mm.

 The KD tap off box conductors number should be selected based on the number of conductors defined by the busbar project design.

### KDP Energy Analyzer Box Horizontal (125A)




16A/32A Single & Three Phase Circuit Breakers  
63A Three Phase Circuit Breaker  
16A/32A Single & Three Phase Socket  
63A Three Phase Socket  
Energy Analyzer with Display  
RJ45 Ports

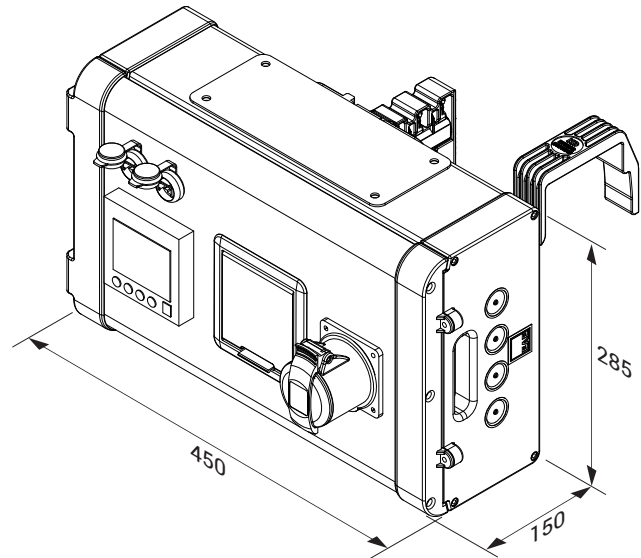


### KDP Empty Box Horizontal (125A)



Configurable up to 12 modules with optional cable gland feed.

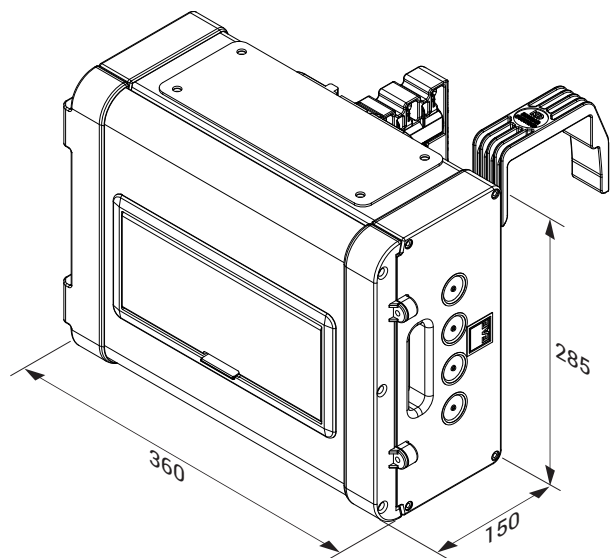


\* Please contact us for special boxes.  
\* All dimensions in mm.

 The KD tap off box conductors number should be selected based on the number of conductors defined by the busbar project design.


# E-LINE KD

## Installation


### Joint Installation

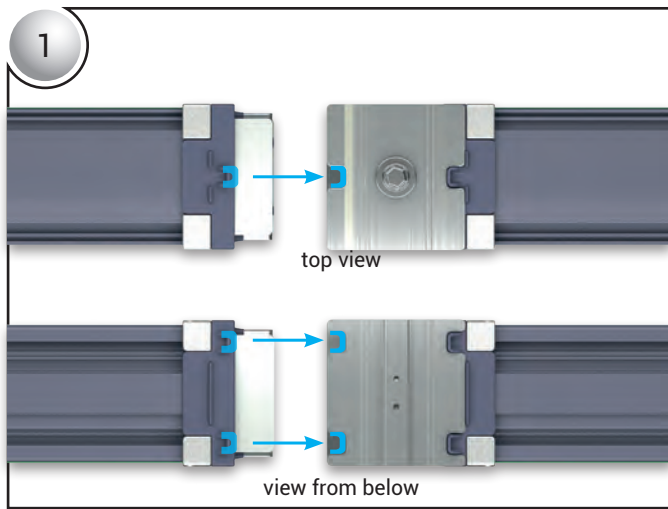


Align the busbars those with and without block joints facing each other and insert together

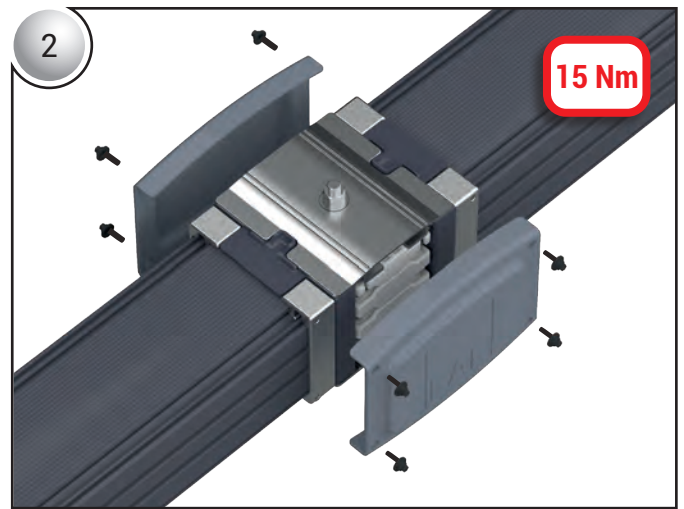

Assemble the joint cover and tighten the cover bolts

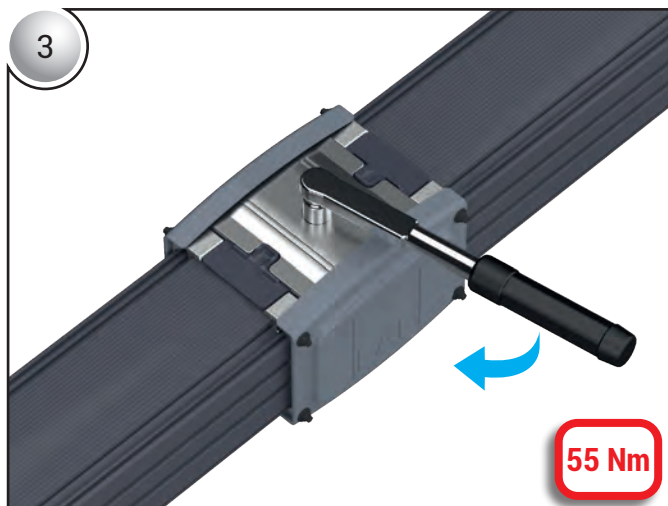

Adjust the torque wrench to 55 Nm and tighten the joint nut

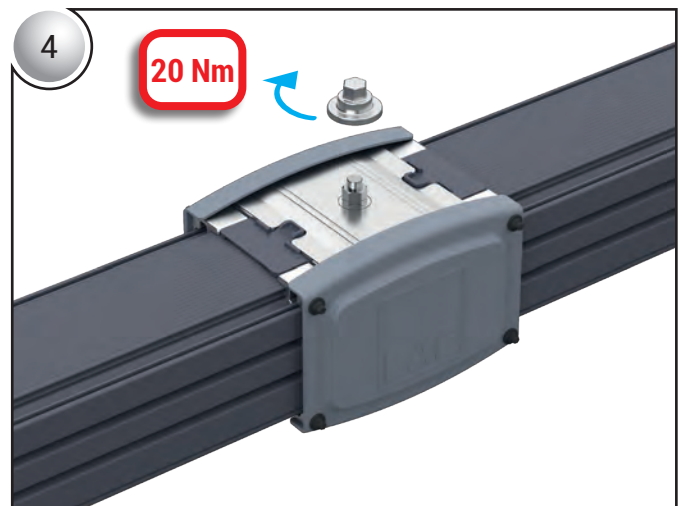


Mount the nut locking piece on the nut

# E-LINE KD

## Installation


### Tap-Off Box Installation

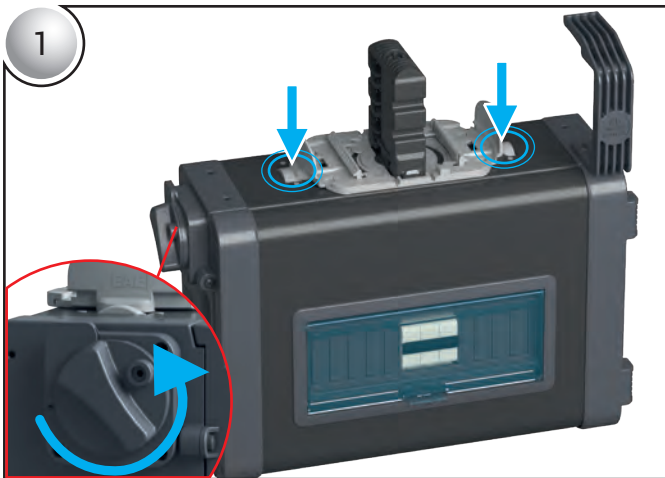


Ensure that the locking latch is in the correct position (as indicated). Engage the installation mechanism by pressing the claws. **If this step is not performed correctly, the tap-off box contact set may be damaged due to excessive mechanical force**



Rotate the contact holder assembly in the indicated direction until it is properly aligned and fully engaged with the base mechanism. Ensure smooth movement and correct alignment with the mounting interface.

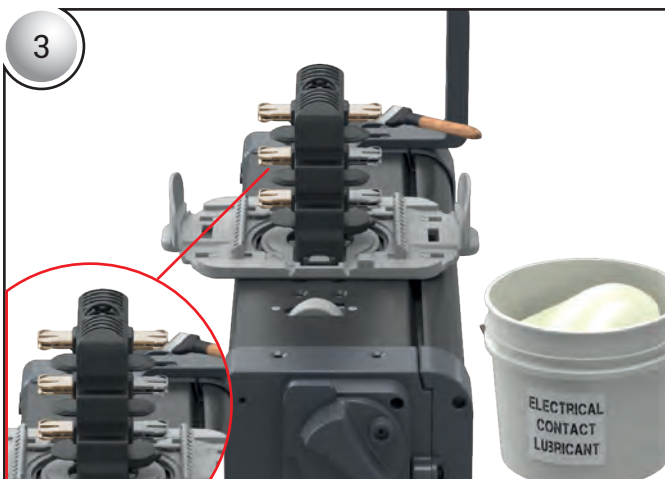

Apply a thin, uniform layer of the specified electrical contact lubricant to the designated contact surfaces. This reduces friction, minimizes wear, and ensures reliable electrical conductivity. Lubricate only the specified contact areas.

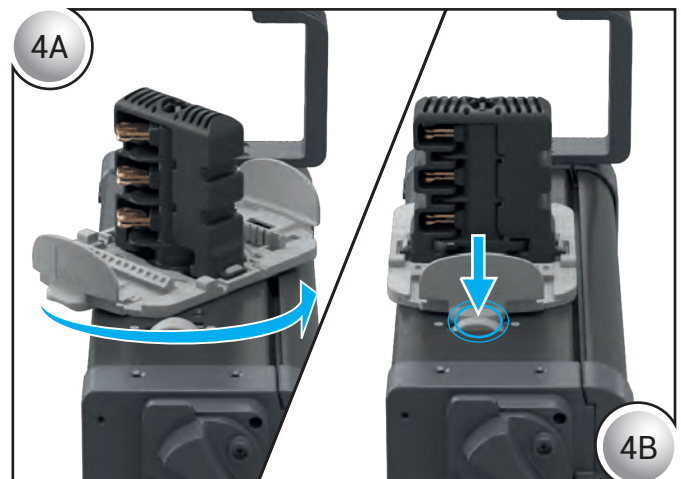

Rotate the contact assembly in the indicated direction until it reaches its final seated position on the base. Press down to engage and secure the locking mechanism (center fixing point as shown) to firmly lock the contact assembly in place. Verify that the assembly is fully seated and properly locked before operation

- Please note that environmental factors such as the amount of lubricant used during production, ambient temperature, humidity, and dust may affect the service life of the TOB conductors. Therefore, it is recommended to reapply lubrication three months after the date of production. In addition, due to the volatility of the lubricant, the lubrication procedure should be repeated whenever there is any doubt regarding its condition.
- The use of high-performance lubricants, such as grease or equivalent products, is strongly recommended. For brand recommendations, please contact us.

**Notes:** For the purpose of ensuring earth continuity, the installation of the upper mechanism onto the busbar may cause minor paint imperfections on the top part of the box. These imperfections are solely cosmetic and do not affect the electrical or mechanical performance of the product.


# E-LINE KD

## Installation


### Tap-Off Box Installation




Insert the tap-off box into the busbar slot, ensuring that the mounting angle is aligned with the housing and the green reference line is visible on the side. **During installation and removal of the tap-off box, all circuit breakers within the unit shall be in the OFF position. Before the installation, verify that all circuit breakers are switched OFF.**

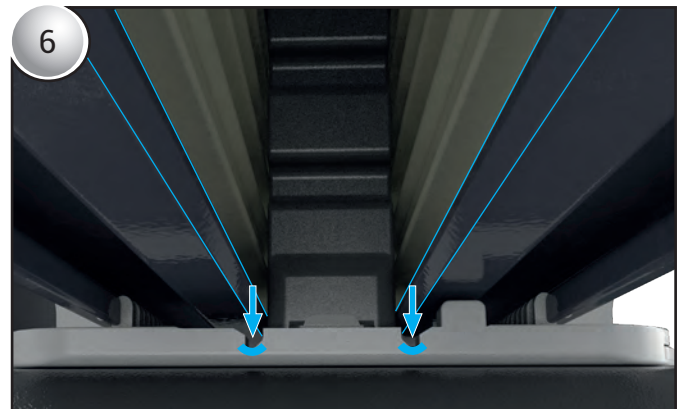


**Ensure that the marked guide slots are fully and correctly seated within the busbar channel. Proper alignment is required before proceeding.**

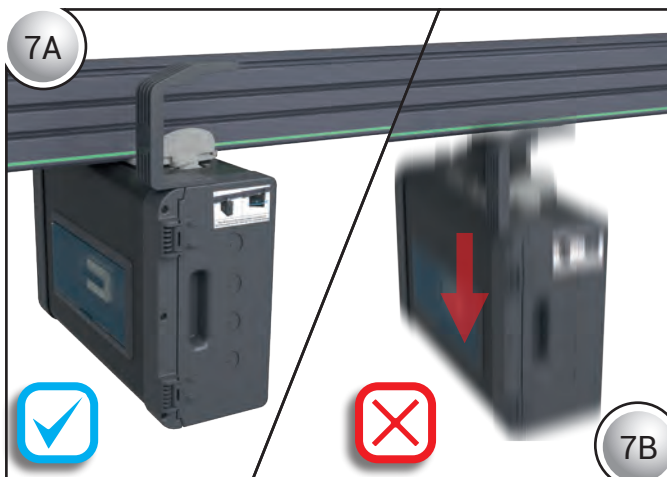

Verify that the tap-off box is fully inserted into the busbar slot and mechanically locked in position.

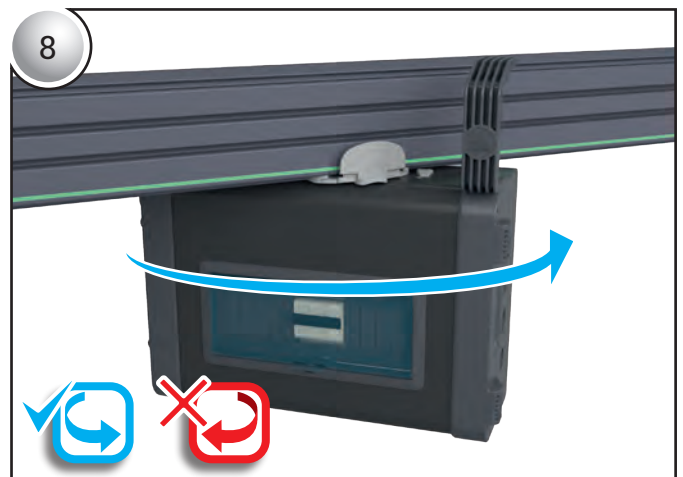

Engage the tap-off box by rotating it in the direction indicated by the arrow until it reaches the operating position. **Do not rotate the tap-off box in the opposite direction.**

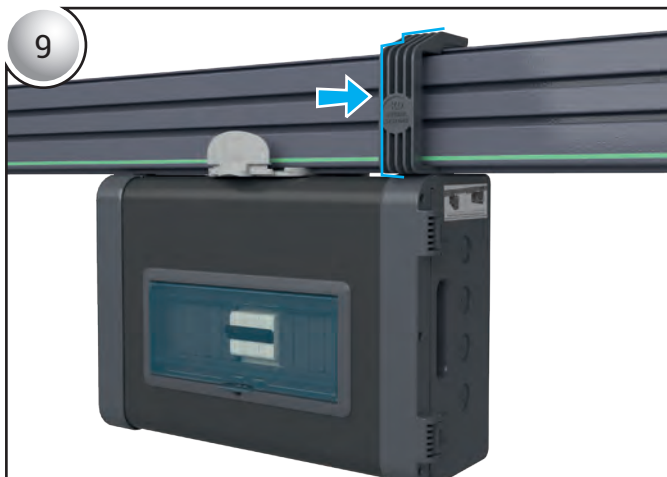

Ensure that the mounting angle is correctly secured onto the busbar housing and properly aligned with the reference line.




Secure the tap-off box by turning the locking latch in the direction indicated by the arrow until it is fully locked.

**Notes:** For the purpose of ensuring earth continuity, the installation of the upper mechanism onto the busbar may cause minor paint imperfections on the top part of the box. These imperfections are solely cosmetic and do not affect the electrical or mechanical performance of the product.


# E-LINE KD

## Installation


### Tap-Off Box Horizontal Installation

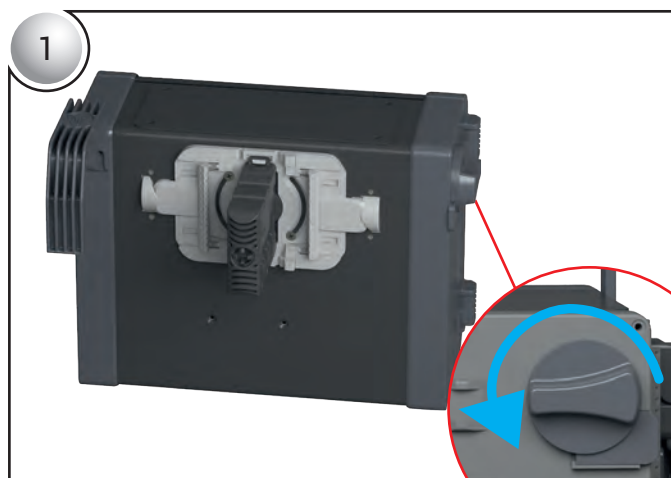


Ensure that the locking latch position is set right (as indicated), setup the installation mechanism by pressing on the claws.

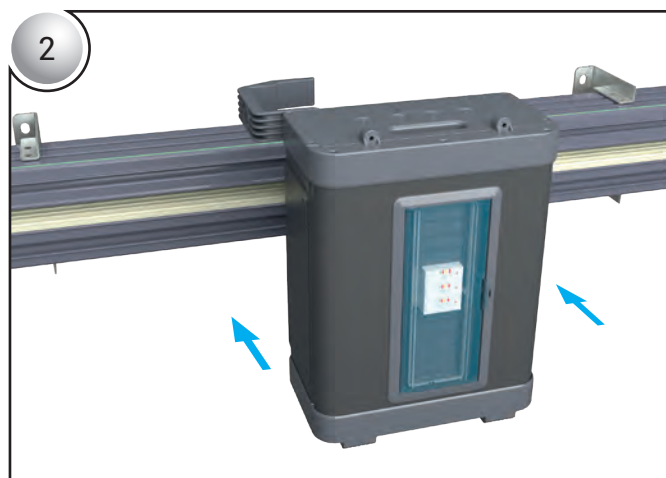

Insert the box inside the slot of the busbar by facing the mounting angle, the box label and the housing 'green' reference line on the same side. **Do not install or remove Plug-in units under load. Make sure breakers are in the off position**

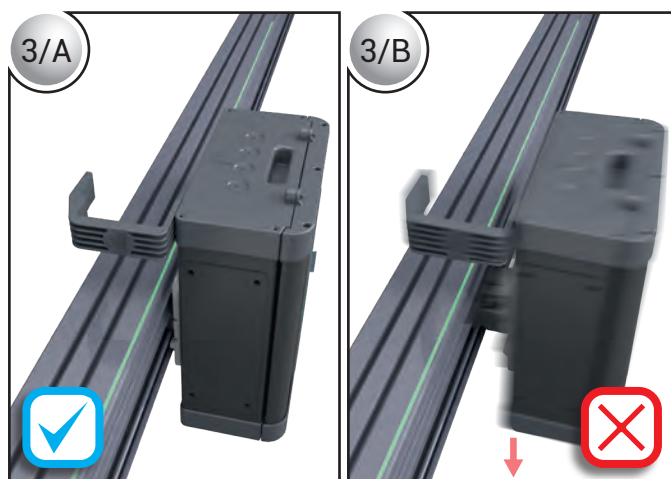

Assure that the box is inserted and locked inside the busbar slot

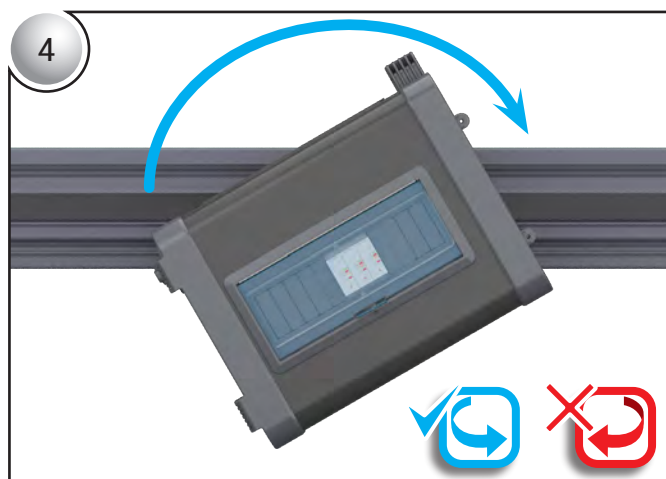

Engage the top off box by rotating in the direction of the arrow. **Do not rotate the box against the direction of the arrow**





Ensure that the mounting angle is correctly attached on the busbar housing



Secure the box by turning the locking latch in direction of the arrow.


**Notes:** For the purpose of ensuring earth continuity, the installation of the upper mechanism onto the busbar may cause minor paint imperfections on the top part of the box. These imperfections are solely cosmetic and do not affect the electrical or mechanical performance of the product.

### Application I : TMP Ceiling Support with Snap-In Fixing Unit

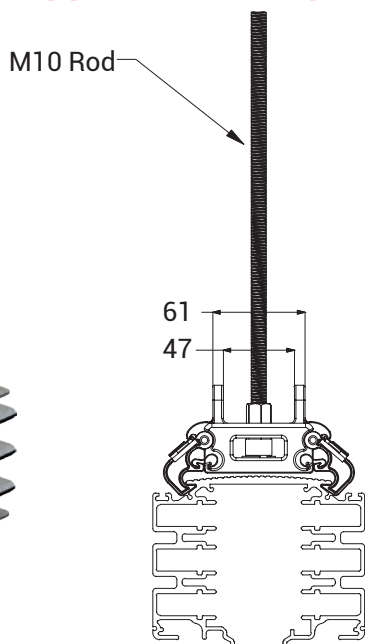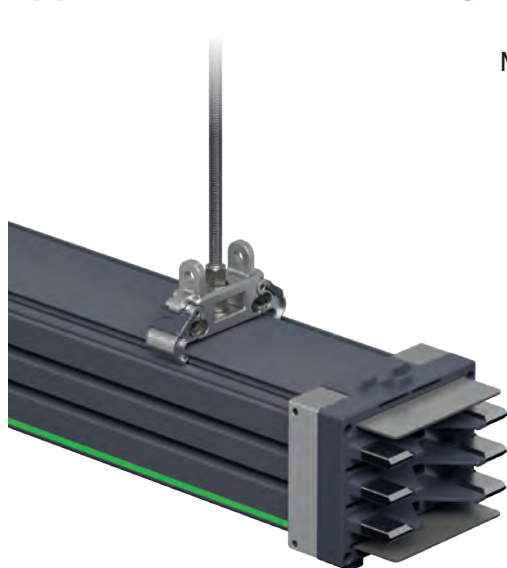

\* Bolt and Nuts are included.


#### ► Hanger Width

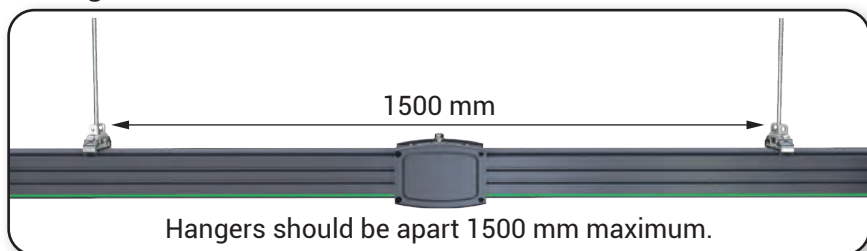


#### THREADED ROD SUPPORT

KD SNAP-IN

2143683


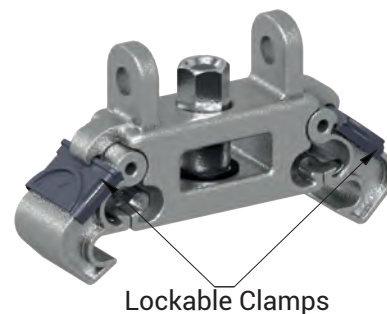


#### ► Fixing Unit Uninstallation

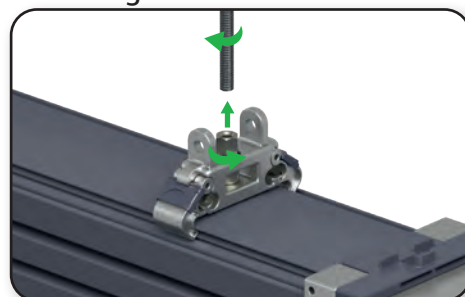

\* The minimum engagement into the hanger is 20 mm.

### Application II : TMP Ceiling Support with Snap-In Fixing Unit

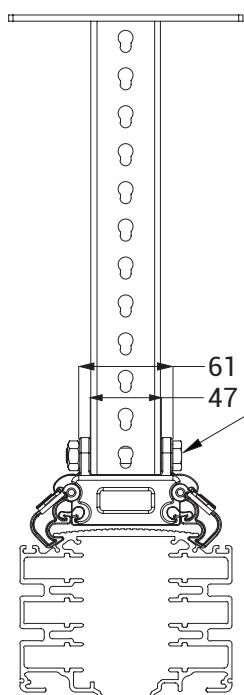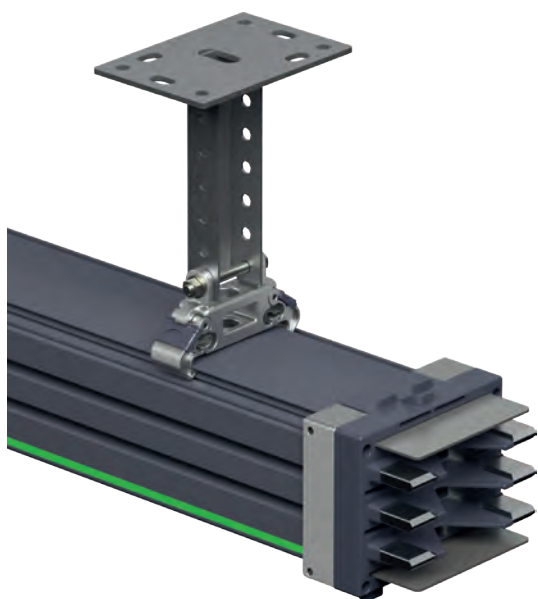


\* Bolt and Nuts are included.  
\* All dimensions in mm.


#### TMP CEILING SUPPORT

KD SNAP-IN



2143682

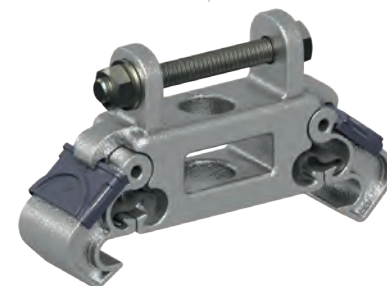

#### ► Fixing Unit Uninstallation

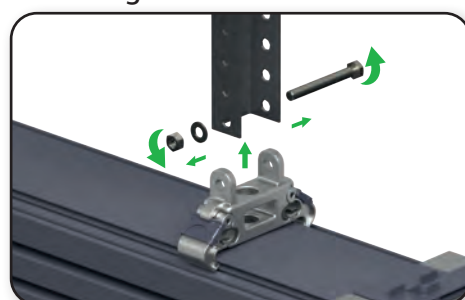


### Application III : TMP Ceiling Support and Tray Bracket with Snap-In Fixing Unit

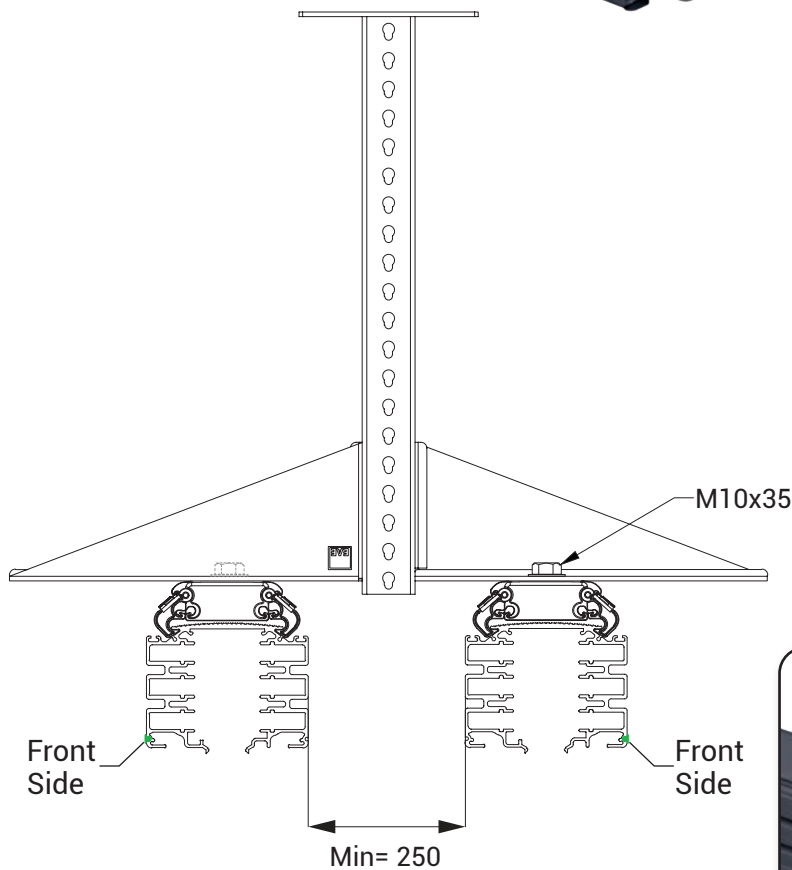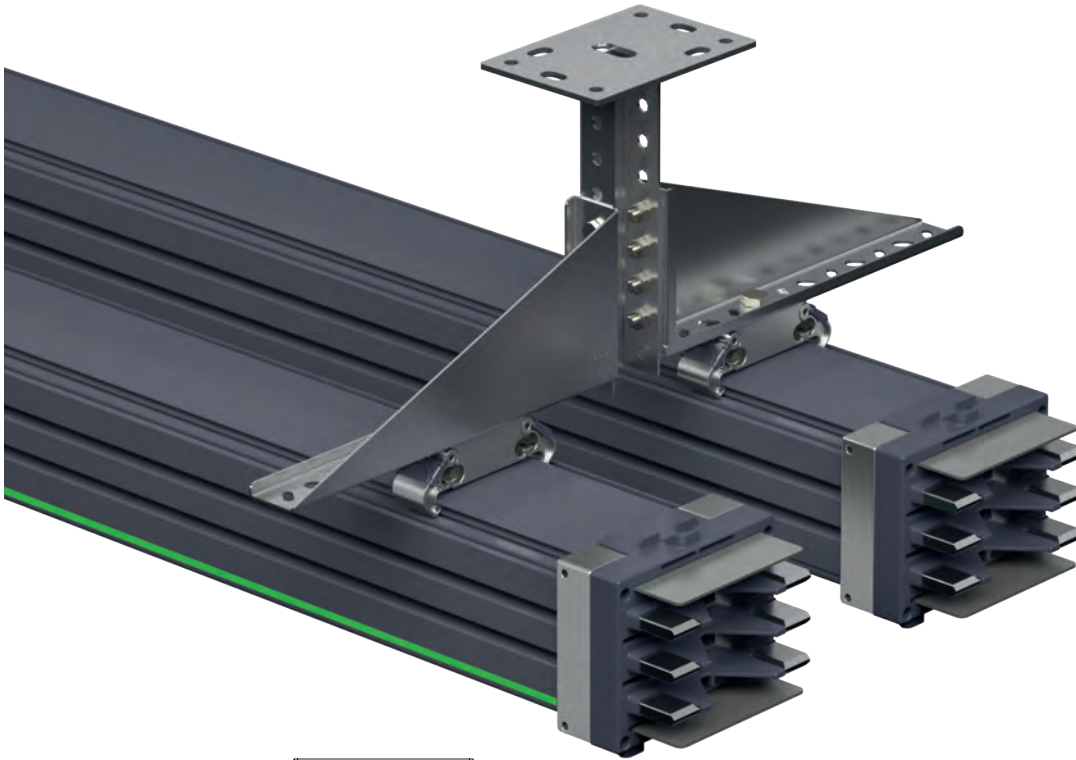


#### TS TRAY SUPPORT

KD SNAP-IN

2143684

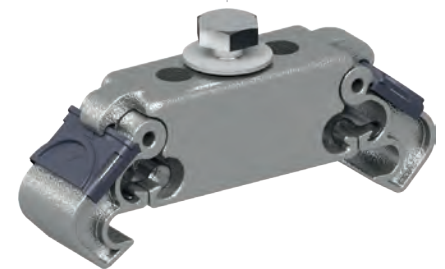

#### ► Fixing Unit Uninstallation

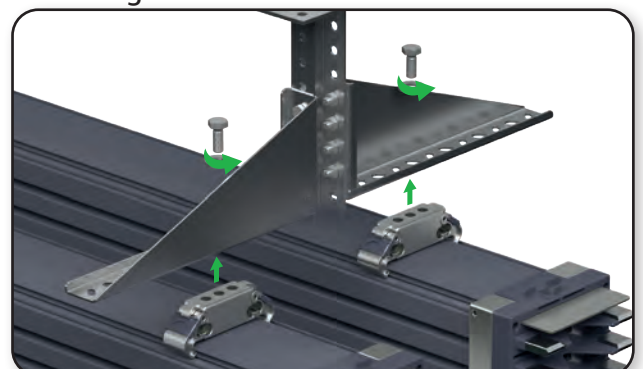


- \* Bolt and Nuts are included.
- \* All dimensions in mm.

### Ceiling Mounting Fittings

Hot Dip Galvanized After Fabrication (TS EN ISO 1461)


Description	L (mm)	T (mm)	Pulling Load (kg.)	Weight (kg./pc.)	Order Code	Pack (pc.)
TMP 42 Ceiling Support Unit	250	2	500	0,542	3008233	20
TMP 43 Ceiling Support Unit	500	2	500	0,949	3008234	10
TMP 44 Ceiling Support Unit	1000	2	500	2,131	3008235	-
TMP 45 Ceiling Support Unit	2000	2	500	3,791	3007952	-

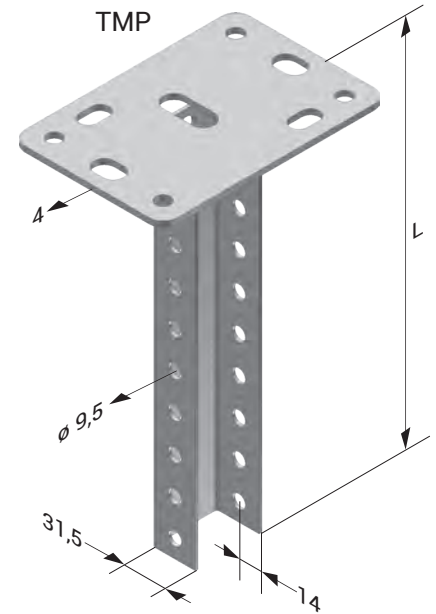

### Tray Supports

Hot Dip Galvanized After Fabrication (TS EN ISO 1461)

Description	A (mm)	T (mm)	Weight (kg./pc.)	Order Code	Pack (pc.)
TS 200	205	2	0,311	3008551	10
TS 250	255	2	0,521	3008549	10
TS 300	305	2	0,607	3008547	10
TS 400	405	2	0,781	3008545	10
TS 500	505	2	0,955	3008543	10
TS 600	605	2	1,128	3005828	10

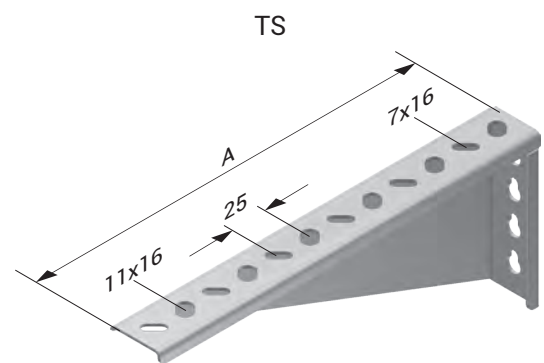


\* Please contact us for special size.  
\* All dimensions in mm.

### Connection Accessories

Description	L (mm)	Weight (kg./pc.)	Order Code
Threaded Rod (M10)	500	0,245	5000037
Threaded Rod (M10)	1000	0,490	5000032
Threaded Rod (M10)	1500	0,735	5000031
Threaded Rod (M10)	2000	1,030	5000030
Threaded Rod (M10)	3000	1,520	5000029
Threaded Rod (M10) Electro Galvanized	500	0,245	5000172
Threaded Rod (M10) Electro Galvanized	1000	0,490	5000173
Threaded Rod (M10) Electro Galvanized	1500	0,735	5000174
Threaded Rod (M10) Electro Galvanized	2000	1,030	5000175
Threaded Rod (M10) Electro Galvanized	3000	1,571	5000301

M10 Rod

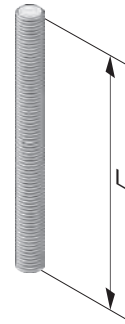


Description	Weight (kg./pc.)	Order Code
Extension Nut (M10) Lacquered	0,070	1004312

Extension Nut



Description	Order Code
Horizontal KD Hanger Element	2185387

Horizontal Hanger

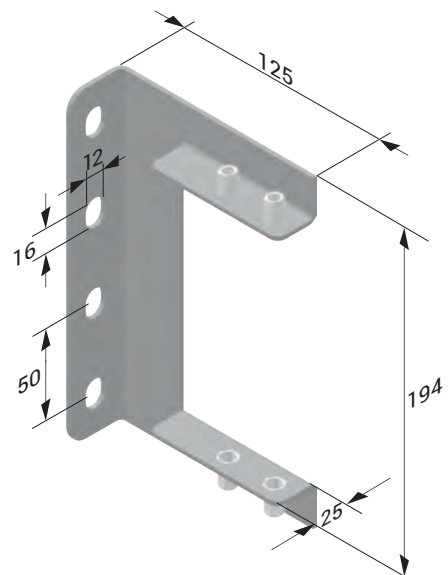


\* Please contact us for special size.  
\* All dimensions in mm.

After installation of standard busbar 3000 mm lengths, you will be in need of special lengths which are smaller than 3000 mm. The minimum length for these special elements can be 650 mm. Please measure the lengths of these modules as shown below.

Length A is measured between housing of 2 busbars in mm. A. The special length is calculated by deducting 97 mm from this measured length.

$X = A - 97 \text{ mm}$

$X = \text{Length of Special Busbar}$  (The busbar module will be manufactured as per X value.)

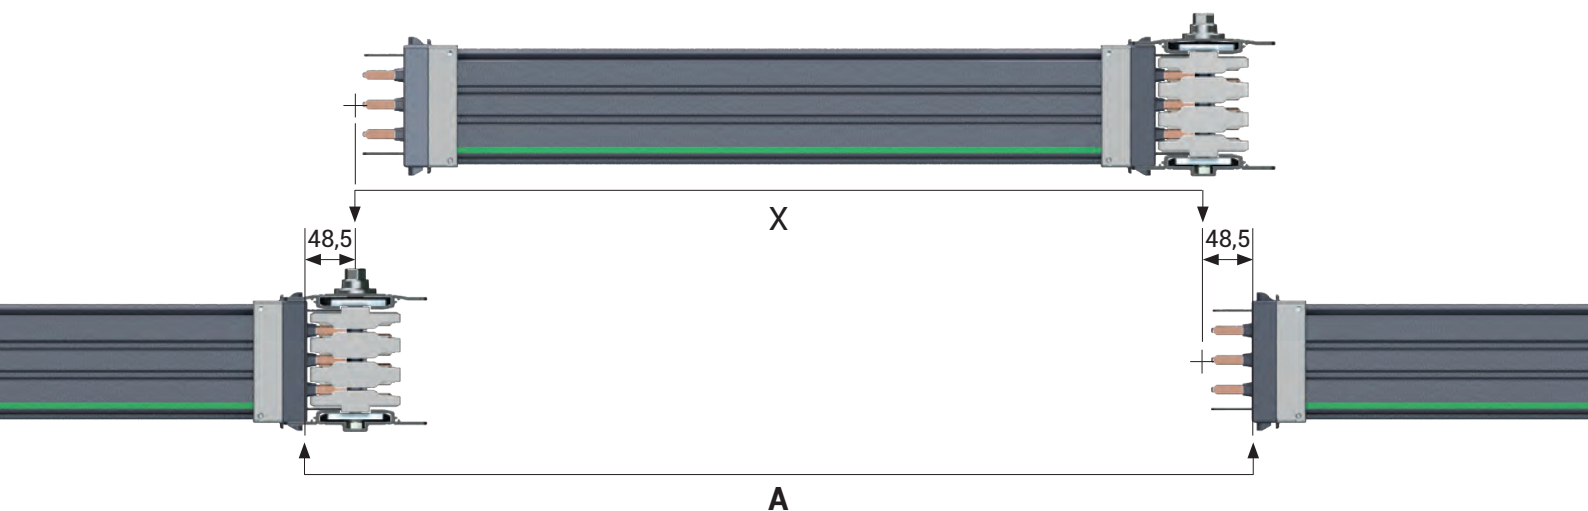

\* All dimensions in mm.

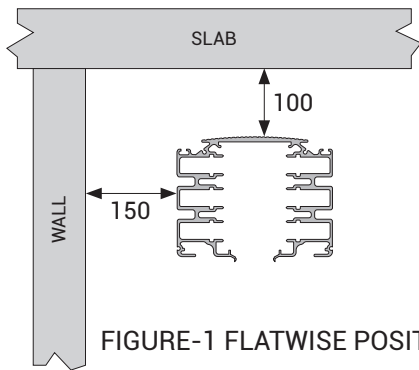


FIGURE-1 FLATWISE POSITION

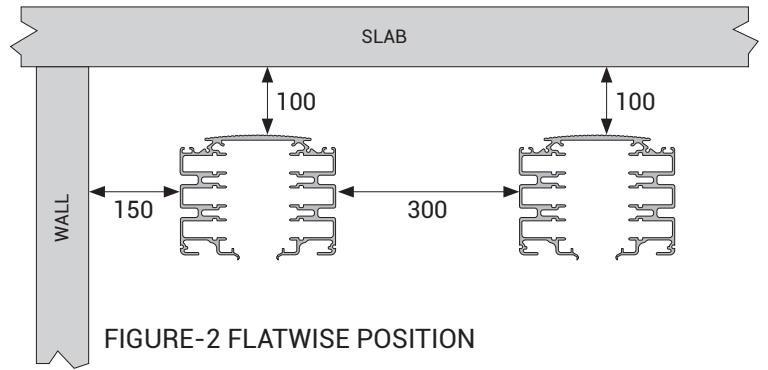


FIGURE-2 FLATWISE POSITION

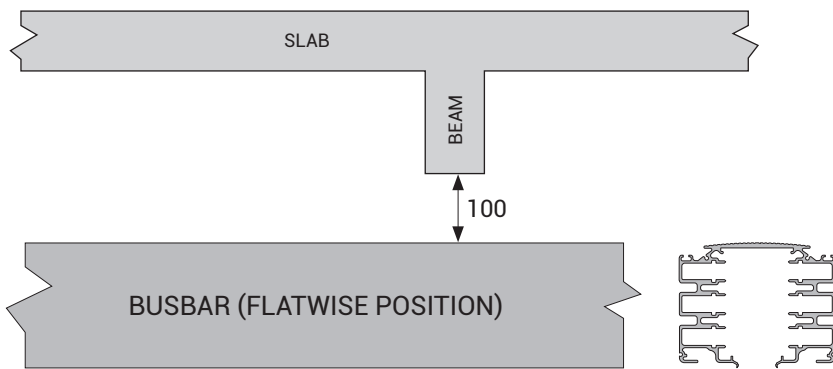


FIGURE-3 CROSSING UNDER A BEAM HORIZONTAL POSITION

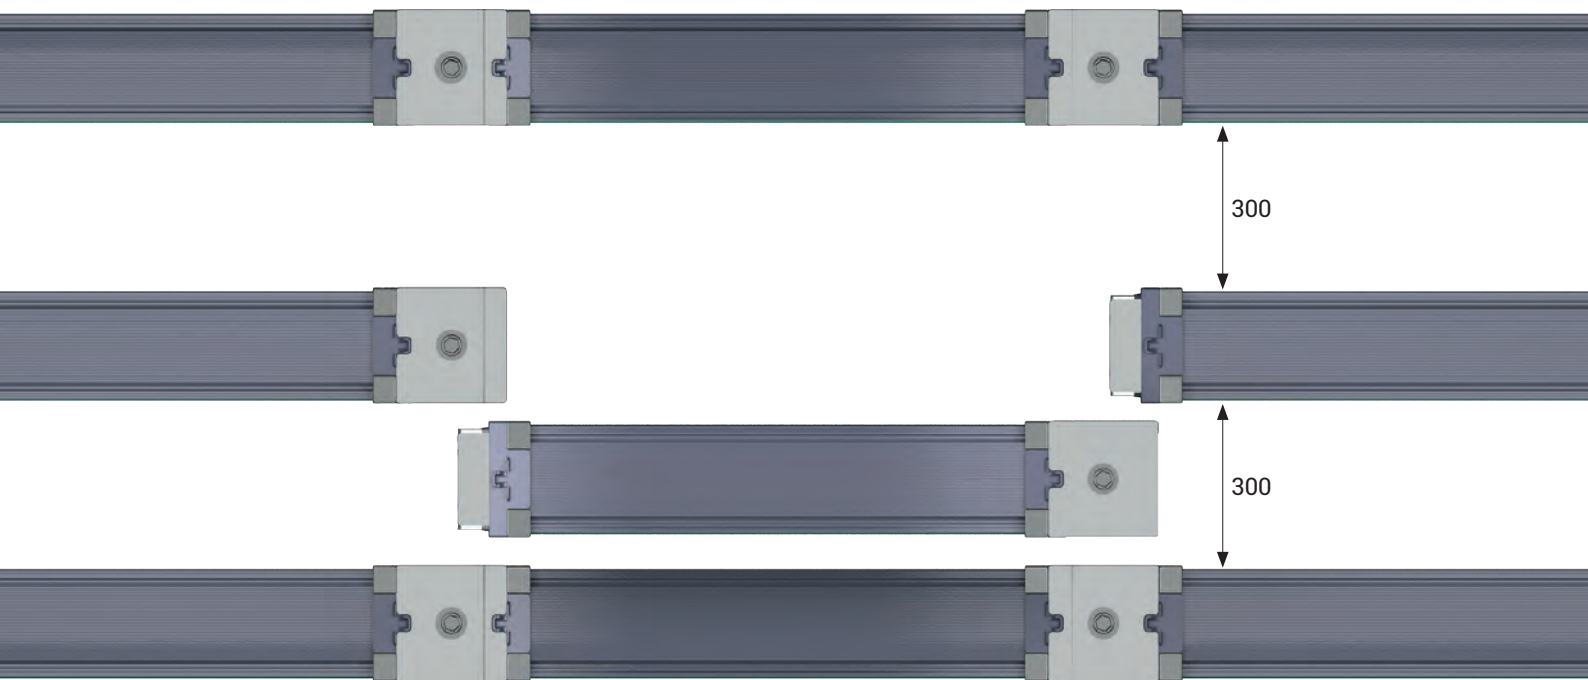


FIGURE-4 MINIMUM DISTANCE BETWEEN BUSBAR RUNS

\* All dimensions in mm.



# CE DECLARATION OF CONFORMITY

**Product Group** E-Line KD Data Rack Busbar

**Manufacturer** EAE Elektrik Asansor End. Insaat San. ve Tic. A.S.  
Akcaburgaz Mahallesi, 3114. Sokak,  
No:10 34522 Esenyurt-Istanbul-Turkey

The objects of the declaration described below is in conformity with the relevant Union harmonisation legislation. This declaration of conformity is issued under the sole responsibility of the manufacturer.

**Standard:**  
TS EN 61439-6  
Low-voltage switchgear and controlgear assemblies - Part 6: Busbar trunking systems

IEC 61439-6  
Low-voltage switchgear and controlgear assemblies - Part 6: Busbar trunking systems (busways)

**CE - Directive:**  
2014/35/EU "The Low Voltage Directive"  
2014/30/EU "(EMC) Electromagnetic Compatibility Directive"  
2011/65/EU "RoHS Directive"

**Technical Document Preparation Official:**  
EAE Elektrik Asansor End. Insaat San. ve Tic. A.S.  
Akcaburgaz Mahallesi, 3114. Sokak, No:10 34522 Esenyurt-Istanbul  
Mustafa AKÇELİK

**Date**  
20.04.2024

**Document Authorized Signatory**  
Elif Gamze KAYA OK  
Deputy General Manager



### 160A ... 1000A DATA RACK BUSBAR PRODUCT OVERVIEW (E-LINE KD)

#### 1- Standards & Certification:

- Busbar system shall be designed and manufactured as per IEC 61439-6 standard, which requires below listed tests. Each busbar rating shall have a separate type test certificate from an independent internationally accredited laboratory including below tests:
  - 10.2- Strength of material and parts, 10.2.2- Resistance to corrosion, 10.2.3- Properties of insulating materials, 10.2.3.1- Verification of thermal stability of enclosures, 10.2.3.2- Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects, 10.2.6- Mechanical impact, 10.2.7- Marking, 10.2.101- Ability to withstand mechanical loads, 10.2.101.1- Test procedure for a straight busbar trunking unit, 10.2.101.2- Test procedure for a joint, 10.2.101.3- Resistance of the enclosure to crushing, 10.3- Degree of protection of assembly, 10.4- Clearances and creepage distances, 10.5- Protection against electric shock and integrity of protective circuits, 10.5.2- Effective earth continuity between the exposed conductive parts of the assembly and the protective circuit, 10.5.3- Short-circuit withstand strength of the protective circuit, 10.9- Dielectric properties, 10.9.2- Power-frequency withstand voltage, 10.9.3- Impulse withstand voltage, 10.10- Verification of temperature rise, 10.11- Short-circuit withstand strength, Annex BB Phase conductor characteristics, Annex CC Fault-loop zero-sequences impedances, Annex DD Fault-loop resistances and reactances.
- Busbar system shall have CE marking.
- The manufacturer of busbar system shall have ISO 9001 and ISO 14001 certification.
- Each product shall have a "Type Label" including coding system, which identifies the brand, type of the unit, number of conductors and electrical details. The same coding shall be on the related certificate and catalogue.

#### 2- Electrical Characteristics

- Busbar systems nominal insulation voltage shall be 1000 V.

##### 2.1- Housing

- Conductors shall be packed and placed into the housing.
- Housing shall be made of thermal processed, extruded aluminium, RAL7012-Electrostatic painted.

##### 2.2- Conductors

- Aluminium or Copper conductors overall isolated and tin plated.
- Aluminium conductors between 160A – 630A.
- Copper conductors between 250A – 1000A.
- Busbar system shall have the following number of conductors and wire configuration;
- 6 Conductors: (6 full size conductors CPE (100% earth conductor + double neutral + housing)),
- Phase conductors and neutral conductor shall have the same cross-section and they shall be insulated.
- Aluminium conductors shall be of EC grade aluminium. Minimum conductivity shall be  $34\text{m}/\text{mm}^2 \cdot \Omega$ .
- Copper conductors shall be minimum 99,95% electrolytic copper. Minimum conductivity shall be  $56\text{m}/\text{mm}^2 \cdot \Omega$ .

##### 2.3- Insulation

- Insulation system shall be suitable for 1.000V continuous operation. Conductor size shall be designed so that temperature rise on the conductors shall not exceed 100°C degree at nominal current, which helps to global heating problem. With this reason, insulation class shall be selected as "B class".

##### 2.4-Joint Structure

- Electrical and mechanical connection shall be made by placing conductor joints into the joint blocks of the connected conductors and followed by tightening and fastening of the joint bolts.

##### 2.5-Protection

- Protection degree of the housing and joints shall be IP23D.

##### 2.6-Acessories

- Busbar system shall have all necessary accessories (elbows, panel-transformer connections, etc.) Manufacturer shall supply special dimensioned units in short time, if the project conditions requires

#### 3-Tap Off Boxes


- The Tap off boxes shall be Plug-nPlay type.
- Plug-n-Play tap off boxes shall be suitable to install or remove from busbars without switching off the power on the busbar.
- Plug-n-Play tap off boxes shall be suitable to install or remove anywhere alongside the busbar.
- The Tap-Off Box contacts shall be protected with a cover
- The Tap-Off contacts shall be heat cycle tested
- Contacts of plug-in tap off box shall be silver plated.
- The special locking mechanism of the Tap-Off Boxes shall ensure to carry the weight of the plug-in box and cables by the busbar housing
- While inserting the contacts of plug-in tap off box, earth contact shall make the first touch. While removing, it shall be disconnected last.
- Tap off boxes shall be manufactured of epoxy painted aluminium.
- The Tap-Off Boxes shall be equipped with a safe alignment mechanism to ensure correct installation and operation

#### 4-Busbar Fixing&Mounting System


- The Busbars shall be easily installed and positioned through their entire lengths with the "Snap-In Fixing Units" by inserting into the guiding slots on top of the housing.
- To ensure flexible positioning of the Busbars, each single busbar length shall easily slide independently on the "Snap-In Fixing Units" through the guiding slots.
- To maintain the mounting security, the "Snap-In Fixing Unit" clamps shall be lockable.
- For various mounting practices the "Snap-In Fixing Units" shall be available with threaded rod, ceiling support and/or with tray brackets options

#### 5-Installation and Commisioning

- Busbar systems shall be installed as per Single-Line drawings respect to required ampere rates and manufacturer installation guide (torque values, lockers, etc.). Electrical installer shall run an insulation test after installation, according to manufacturer's test procedures. The results of the test shall be reported to the manufacturer and minimum insulation value shall be 1 Mohms.

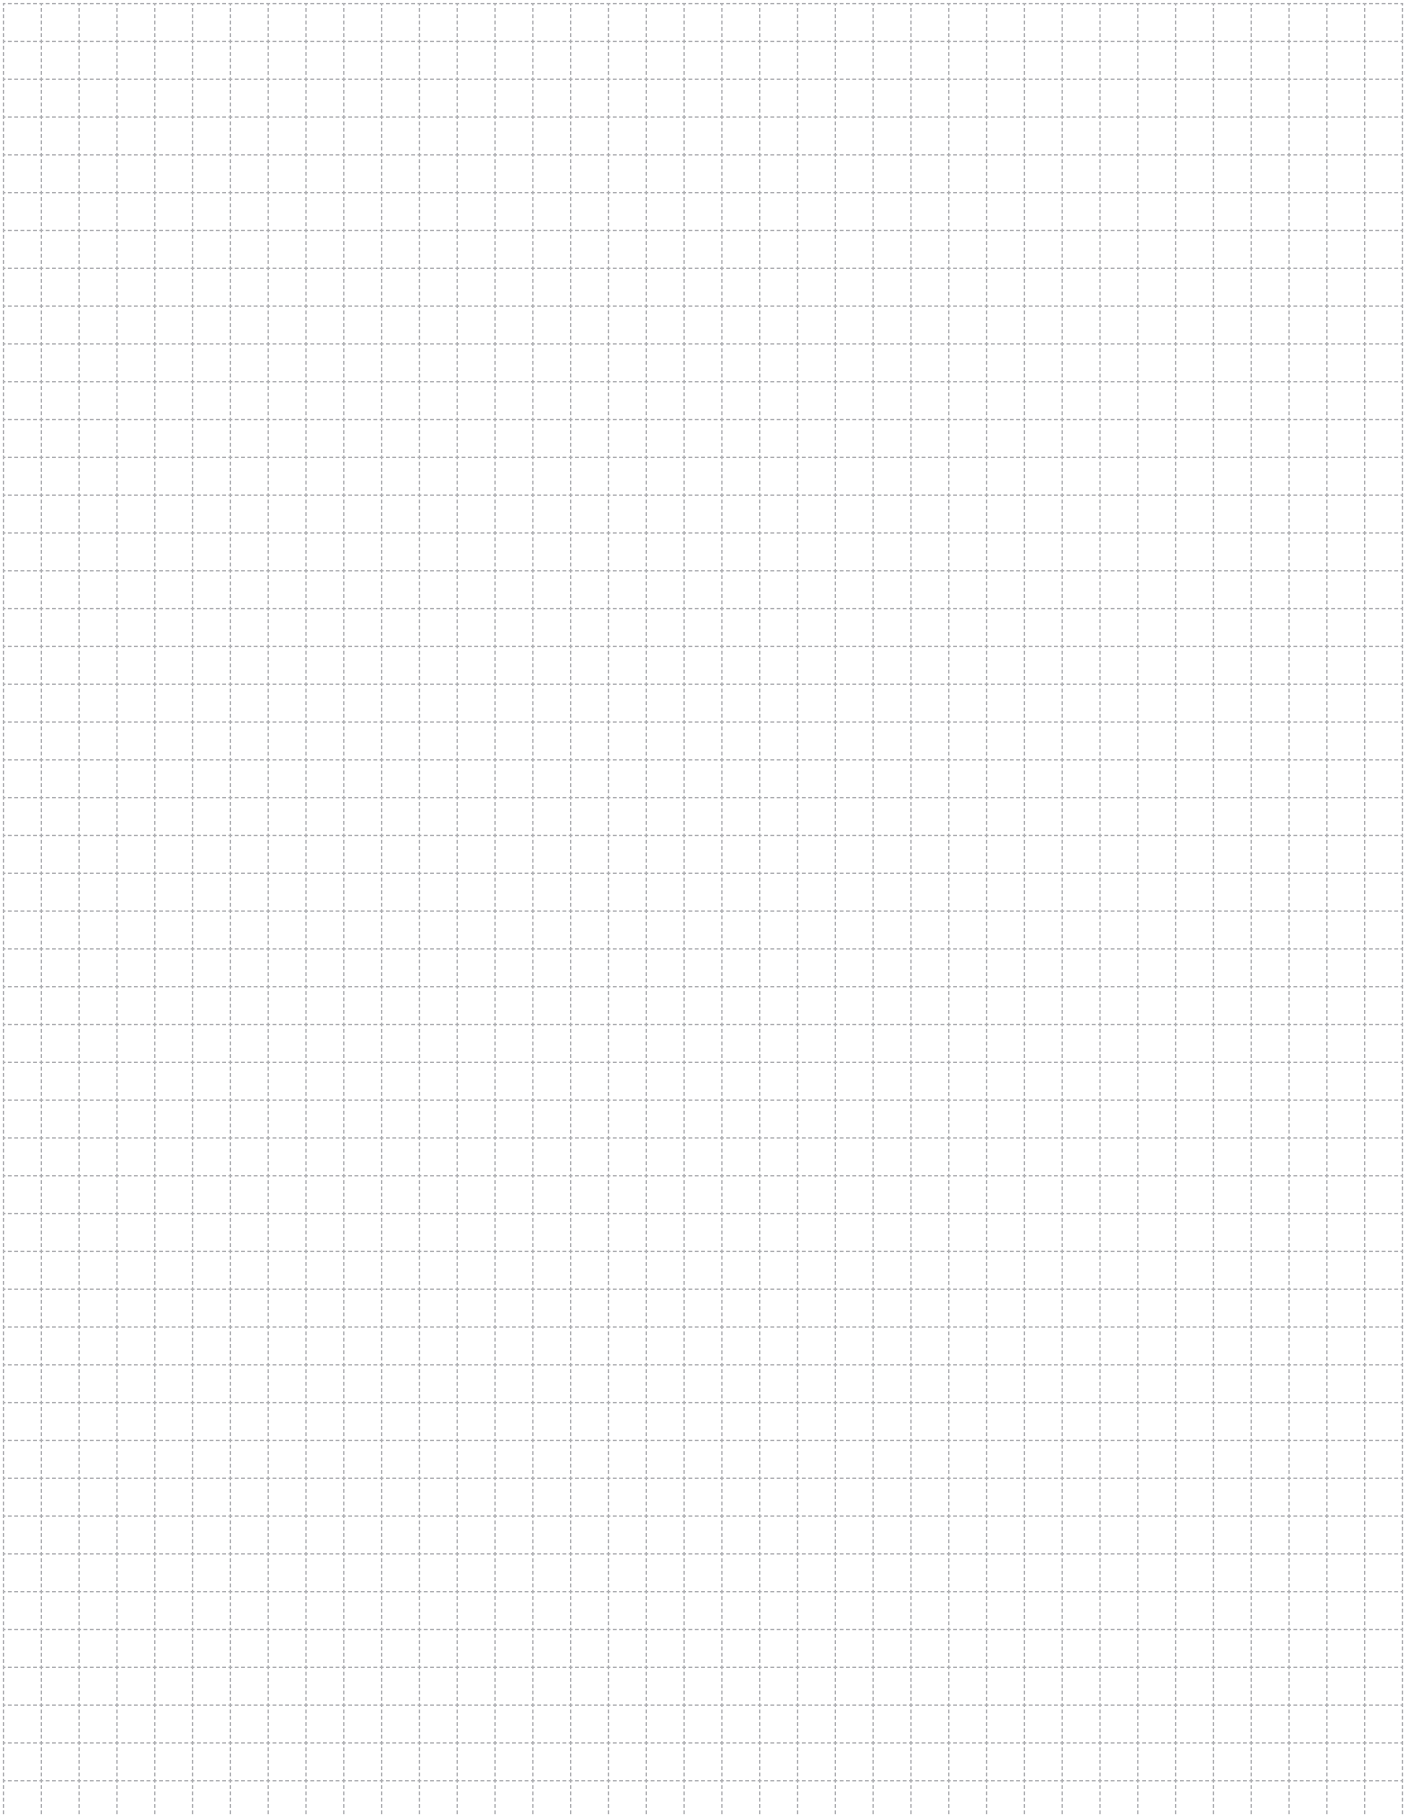

A large grid area for taking notes, consisting of a 20x30 grid of small squares.

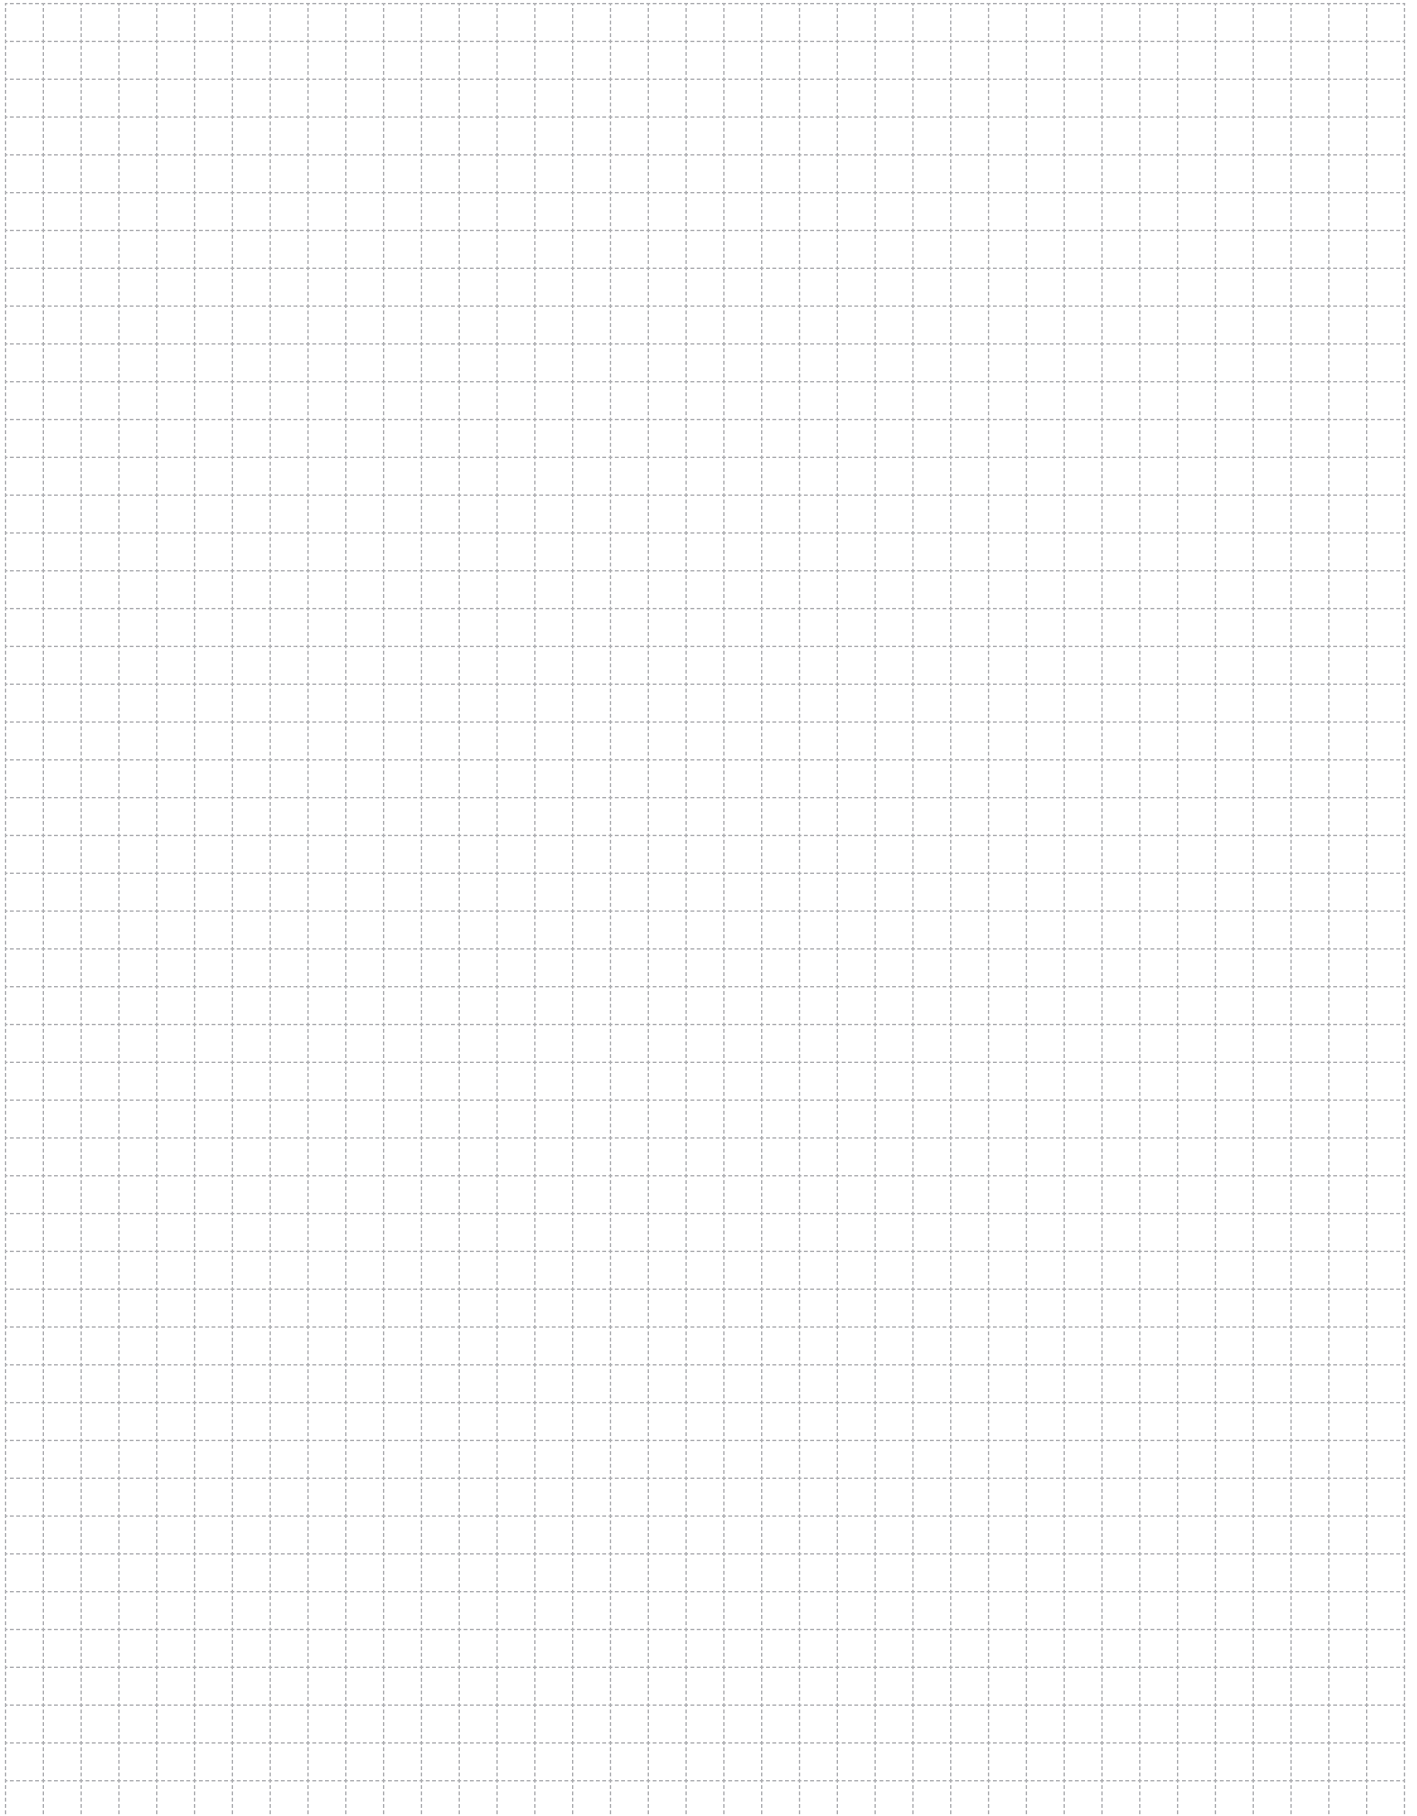


A large grid area for taking notes, consisting of a 20x30 grid of small squares.

# SUSTAINABLE FUTURE


## Sustainability Management at EAE Elektrik




As part of our goal to support sustainable development and green transformation, measuring, evaluating, and managing all economic, environmental, and social impacts resulting from our sustainability practices is a key governance priority for EAE Elektrik. We act with great care in analyzing, monitoring, and managing the economic, environmental, and social impacts and risks that arise throughout our value chain in both our national and global operations.




Busbar Systems



Cable Tray Systems



Support Systems



Trolley Busbar Systems



Fit-Out Solutions

*"We are working together with all our stakeholders to develop the electrical technologies that will build the future."*

You can visit our sustainability website at [surdurulebilirlik.eae.com.tr](http://surdurulebilirlik.eae.com.tr)



**EAE Elektrik**

**Head Office**

Akcaburgaz Mahallesi,  
3114. Sokak, No: 10 34522  
Esenyurt - Istanbul - Türkiye  
Tel: +90 (212) 866 20 00  
Fax: +90 (212) 886 24 20

**EAE DL 3 Factory**

**Busbar**

Gebze IV Istanbul Makine ve Sanayicileri  
Organize Bolgesi, 6.Cadde,  
No:6 41455 Demirciler Koyu,  
Dilovasi - Kocaeli - Turkiye  
Tel: +90 (262) 999 05 55  
Fax: +90 (262) 502 05 69

**EAE DL 4 Factory**

**Busbar 2**

Gebze IV Istanbul Makine ve Sanayicileri  
Organize Bolgesi, 6.Cadde,  
No:14/10 41455 Demirciler Koyu,  
Dilovasi - Kocaeli - Turkiye  
Tel: +90 (262) 999 05 55  
Fax: +90 (262) 502 01 45



Please visit our website for the updated  
version of our catalogues.  
[www.eaelectric.com](http://www.eaelectric.com)



Catalogue 55 - En. / Rev.18 / 0 Pcs. / 06.03.2026  
D.S.

EAE has full right to make any revisions or changes on this catalogue without any prior notice.