Audimute Strata[®]





AUDIMUTE STRATA® TEXTURED ACCENT WALL


Tileable Stone Textured Finish


At Audimute, we have an innovative approach in creating extraordinary sound environments. We specialize in eliminating your sound problems; however, our goal is to design solutions that reflect your personal taste and style.

Our exclusive line of Audimute Strata Stone Textured Accent Wall brings robust elegance into your home or office. Meticulously crafted from our trademarked acoustic absorption material eco-C-tex®, this product is one-of-a-kind. Included is 22-24 sq.ft. worth of material (96 pieces: 24" per piece), with a thickness of 1.5" +/- 0.25".

Known for its natural bands of texture playing throughout, the final appearance of Audimute Strata Stone Texture Accent Wall has normal irregularities that are considered part of the appeal. Variations in the appearance of texture and shading for example, create a distinctively interesting character that makes this product so unique. Audimute Strata Stone Texture Accent Wall delivers the aesthetics of rustic natural stone; therefore, variations are both normal and desirable. Key characteristics are a dense yet porous fine-grained appearance. Each piece is unique with textures occurring naturally. Finish the product with a single color of your choice or create a two tone accent wall. Chose from 1,000 of colors from our Sherwin-Williams line or have us match any color to fit your décor.





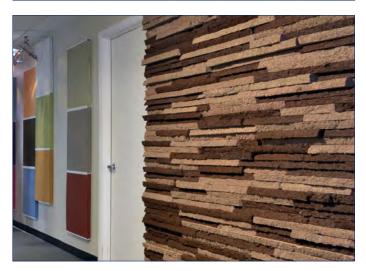

AUDIMUTE STRATA® FLAT ACCENT WALL

Tileable Flat Finish

Audimute Strata Flat in many ways is the big brother to our Audimute Strata Textured. It has a flat stone finish that compliments a refined style while adding intrigue to the surface via the varying depth of the product. Designed with acoustic effectiveness in mind without compromising design. Audimute Strata comes in nine standard different two tone styles and can also be coated to match any Sherwin-Williams paint color.

Included is 22-24 sq.ft. worth of material. There are 96 pieces (24" per piece), with a thickness of 1.5" +/- 0.25", and 3 different depths, 1" (32 pcs), 1.75" (36 pcs), and 2.5" (28 pcs).







AUDIMUTE STRATA® CITYSCAPE, CURVE, SLANT, & SAWTOOTH

Additional UniqueStyles

Audimute Strata Cltyscape, Curve, Slant, and Sawtooth are the newest additions to the product line. Each option has a unique appearance and absorbs sound as effectively as our Textured and Flat options. All options consist of 22-24 sq.ft. worth of material and can be coated with your choice of Sherwin-Williams paint colors.

CITYSCAPE:

- Pieces: 96 (24" per piece), with a thickness of 1.5" +/- 0.25".
- Depth: .625" to 3.375" (+/- 0")

CURVE:

- Pieces: 96 (24" per piece), with a thickness of 1.5" +/-0.25".
- Depth: 1.625" to 2.375" (+/- 0")

SLANT:


- Pieces: 96 (24" per piece), with a thickness of 1.5" +/-0.25".
- Depth: 1" to 3" (+/- 0")

SAWTOOTH:

- Pieces: 96 (24" per piece), with a thickness of 1.5" +/-0.25".
- Depth: 1.5" to 2.5" (+/- 0")



SAWTOOTH



CITYSCAPE



CURVE



SLANT

5

AUDIMUTE STRATA®: SPECIFICATIONS

CONTENT	Acoustic Absorption Substrate: P.E.T. 10% - 30%, Recycled Cotton 70% - 90%	
COMPONENTS	Acoustic Substrate, Coating, Installation Tape and Adhesive	
DEPTH	Textured: 2.5" to 4" Flat: 1", 1.75", 2.5" Cityscape: .625" to 3.375" Curve: 1.625" to 2.375" Slant: 1" to 3" Sawtooth: 1.5" to 2.5"	
THICKNESS TOLERANCE	Textured, Flat, Cityscape, Curve, Slant, & Sawtooth: +/- 0.25"	
SQ.FT. QUANTITY	22-24 sq.ft.	
FINISH OPTIONS	Two Tone AcoustiColor® Coating, Single Tone AcoustiColor Coating	
FACE STYLE	Textured, Flat, Cityscape, Curve, Slant, Sawtooth	
APPLICATION	Indoor Walls	
INSTALLATION	Tape (included), Construction Adhesive (not included)	
HANDLING / CARE	When handling panels make sure hands are clean and oil free. Vacuuming or light brushing is recommended to prevent dust and soil buildup.	
STORAGE	Must be stored in a dry place. Delivery Packaging is not ideal for storage purposes. It is advised to place a polyethylene cover over the stack when packaging is removed, to reduce moisture absorption. It is recommended that product be stored horizontally. It is recommended that product should not be stacked. It is strongly recommended to avoid storage longer than 6 months. Do not allow water to come into direct contact with the material during storage. Store in a cool dry space 55°F - 85°F.	
FIRE RATING	ASTM E84 Class A.	
COLOR FASTNESS TO LIGHT	Grade 4 min. at 40 hours	
COLOR FASTNESS TO CROCK	Grade 4 min. dry, Grade 3 min. wet	
ACOUSTIC RATING	NRC: 0.95	


AUDIMUTE STRATA®: ACOUSTICOLOR® COATING OPTIONS

The possibilities are endless.

There are 1,000's of color options to choose from Sherwin-Williams' line of acoustical coatings. We can also match colors from other commercial paint manufacturers.

With Audimute Strata, you have the opportunity to match the décor of any space. Our coated acoustic panels are made from recycled cotton and paper products which gives a unique textured finish.

NOTE: Color matching cannot be guaranteed across shipments from different orders and variation may be more pronounced beyond the normal commercial range.

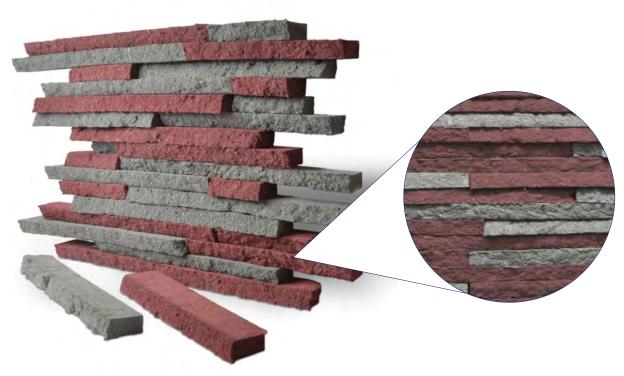

Audimute Strata Stone Textured Accent Wall


AcoustiColor Swatch Detail

AUDIMUTE STRATA®: ACOUSTICOLOR® COATING OPTIONS

Add exceptional sound absorption, superior aesthetics, and design flexibility that reflects your individual personality and style.

Audimute Strata Accent Walls are lightweight and create a modern appearance combined with noise reduction and reverberation control. Stylish lines and soft shapes suspend horizontally from the ceiling and absorb sound across their entire surface for unequaled acoustical performance. Because Audimute Strata is created using recycled materials, natural variations in texture and shading can occur.

Sand Dune

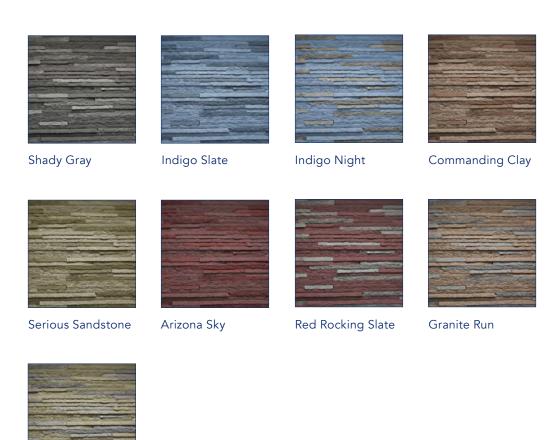

AUDIMUTE STRATA®: ACOUSTICOLOR® COATING OPTIONS




AUDIMUTE STRATA®: ACOUSTIC TESTING

Audimute Strata Test Report

The test report quotes the frequency dependent sound absorption data as well as the single number ratings. Data taken from Test Report RAL-A17-297 conducted by Riverbank Acoustical Laboratories. Complete test results are available upon request.


FREQUENCY (HZ) ABSORPTION COEFFICIENT 100 0.13 125 0.23 160 0.29 200 0.43 250 0.62 315 0.87 400 0.96 500 1.04 630 1.07 800 1.09 1000 1.11 1250 1.14 1600 1.10 2500 1.09 3150 1.06 4000 1.07		
125 0.23 160 0.29 200 0.43 250 0.62 315 0.87 400 0.96 500 1.04 630 1.07 800 1.09 1000 1.11 1250 1.14 1600 1.10 2000 1.10 2500 1.09 3150 1.06 4000 1.07	FREQUENCY (HZ)	
160 0.29 200 0.43 250 0.62 315 0.87 400 0.96 500 1.04 630 1.07 800 1.09 1000 1.11 1250 1.14 1600 1.10 2000 1.10 2500 1.09 3150 1.06 4000 1.07	100	0.13
200 0.43 250 0.62 315 0.87 400 0.96 500 1.04 630 1.07 800 1.09 1000 1.11 1250 1.14 1600 1.10 2000 1.10 2500 1.09 3150 1.06 4000 1.07	125	0.23
250 0.62 315 0.87 400 0.96 500 1.04 630 1.07 800 1.09 1000 1.11 1250 1.14 1600 1.10 2000 1.10 2500 1.09 3150 1.06 4000 1.07	160	0.29
315 0.87 400 0.96 500 1.04 630 1.07 800 1.09 1000 1.11 1250 1.14 1600 1.10 2000 1.10 2500 1.09 3150 1.06 4000 1.07	200	0.43
400 0.96 500 1.04 630 1.07 800 1.09 1000 1.11 1250 1.14 1600 1.10 2000 1.10 2500 1.09 3150 1.06 4000 1.07	250	0.62
500 1.04 630 1.07 800 1.09 1000 1.11 1250 1.14 1600 1.10 2000 1.10 2500 1.09 3150 1.06 4000 1.07	315	0.87
630 1.07 800 1.09 1000 1.11 1250 1.14 1600 1.10 2000 1.10 2500 1.09 3150 1.06 4000 1.07	400	0.96
800 1.09 1000 1.11 1250 1.14 1600 1.10 2000 1.10 2500 1.09 3150 1.06 4000 1.07	500	1.04
1000 1.11 1250 1.14 1600 1.10 2000 1.10 2500 1.09 3150 1.06 4000 1.07	630	1.07
1250 1.14 1600 1.10 2000 1.10 2500 1.09 3150 1.06 4000 1.07	800	1.09
1600 1.10 2000 1.10 2500 1.09 3150 1.06 4000 1.07	1000	1.11
2000 1.10 2500 1.09 3150 1.06 4000 1.07	1250	1.14
2500 1.09 3150 1.06 4000 1.07	1600	1.10
3150 1.06 4000 1.07	2000	1.10
4000 1.07	2500	1.09
	3150	1.06
E000 4.07	4000	1.07
5000 1.06	5000	1.06

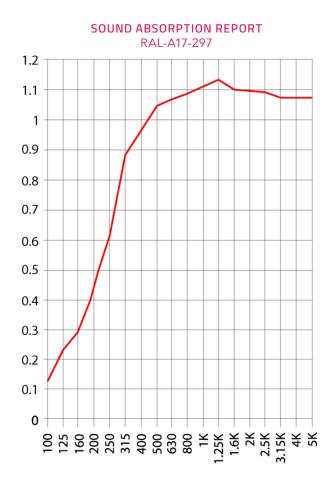

Audimute Strata® Installation Instructions:

AUDIMUTE STRATA TAPE (Included) & LOCTITE® POWER GRAB® EXPRESS HEAVY DUTY (Not Included)

Audimute Strata consists of pieces in multiple sizes. To install, you will just need the included Audimute Strata Tape and Loctite Power Grab Express Heavy Duty adhesive. Use a retractable utility knife and a T-square to cut the pieces if needed for an exact fit. Curve, Slant, and Sawtooth styles should be installed with the pieces mindfully applied to achieve the desired look.







Step 1: Apply the tape vertically to the wall, about 9"-16" apart.



Step 2: Starting from where the lowest row will be, apply adhesive between the tape, using just enough to add Audimute Strata pieces before the adhesive dries.



Step 3: Add pieces to create the first row, then work your way up the wall by adding more adhesive and pieces, cutting the pieces if needed. Please note, pressing down too hard from the top of the pieces when stacking them may result in less total sqft.











Mitch Zlotnik

Founder & President of Audimute

Our founder Mitch Zlotnik loved his drums and respected his neighbors. So he invented a versatile sound absorption solution a musician could afford and a neighbor would love. Today our invention, eco-C-tex® is the key ingredient in a versatile suite of sound absorption and sound proofing solutions. Proudly made from 100% recycled materials, Audimute products are revolutionizing the way people experience work, worship, entertainment, and their home.

1.866.505.MUTE sales@audimute.com 9 am – 5 pm, Monday – Friday EST.