



Cut Cost. Cut Complexity. Cut Cassettes.

INFINIUM acclAIM FIBER SOLUTION

Infinium acclA/M redefines connectivity by replacing pre-terminate cassette-based solutions with direct connections eliminating computations, and cost. Infinium acclA/M delivers the only connectivity of market with a near lossless link, almost unlimited scalability, and no considerations. The direct mating breakout and application defined vastly improves density and flexibility and enables sustainable migrating proving system life-cycle tremendously.

Minimize Loss - Maximize Optical Headroom

- Lowest loss pre-term Solution
- Minimize or eliminate need for splicing
- Maximize optical headroom to overcome barriers to performance

Design Smarter - Longer Lifecycle

 Simplicity of design combined with application-defined on-site polarity adjustment, fewer components, and near-lossless performance enables acclAIM to provide a multi-generational lifecycle with a single installation of a sustainable building asset for decades to come

Ultra-High Density Plus (UHD+)

 Make the most of each rack unit (RU) with UHD+ offering up to 192 fibers per RU (33% more than High Density)

Simplify Connectivity

- No gender considerations no pins, just direct connections
- Direct-Mating Breakout acclA/M connectors mate directly to an array of 2-fiber MDC duplex patch cords
- Application-Defined Polarity polarity can be adapted to nearly any link configuration; preplanned, on-site, or on the fly with no options to determine when ordering or designing
- Improved accessibility with the increased density of each connector and a smaller footprint enabled by acclAIM, there is more room to work on each panel

Reduce Labor - Lower Cost

- 40% faster install
- 60% faster removal
- Single link testing after mating
- Faster moves adds & changes

Approaching Infinite Scalability

 Based on the simplified design, unparalleled performance, and architecture flexibility, Infinium acclAIM has an almost limitless migration path

Go Live Faster


 Easy to stock and short lead times for conversion adapters enable rapid or emergency deployment




MDC CONNECTOR




acclAIM CONVERSION ADAPTE




acclAIM CONNECTO

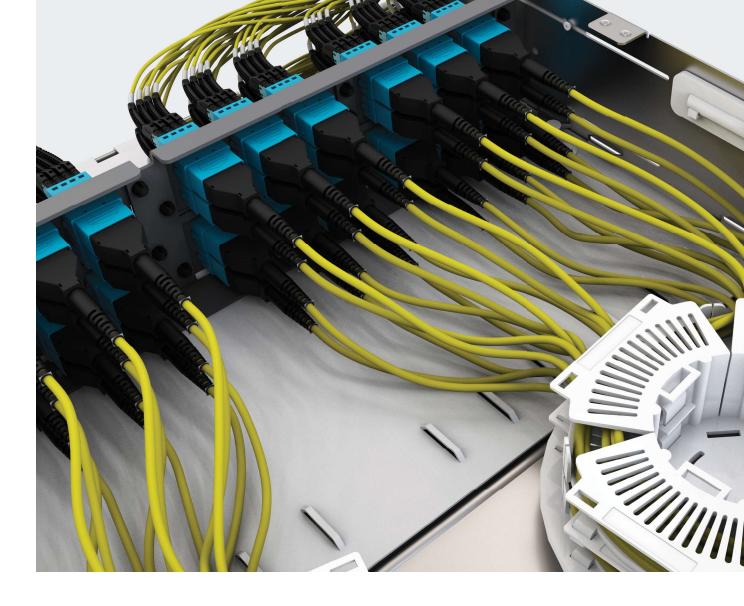

4

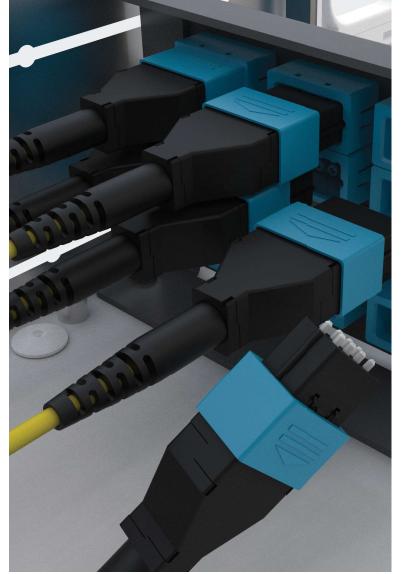


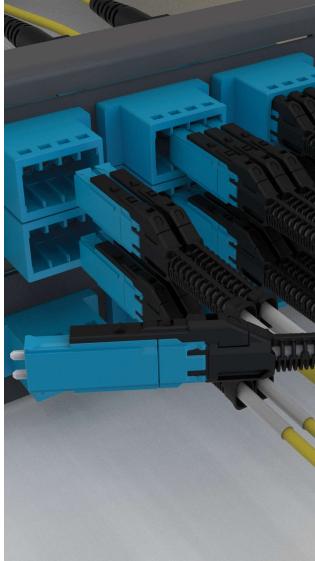

Infinium acclAIM Trunk

Infinium accl*AIM* Conversion Adapter Panel and MDC Patch Cord

INFINIUM acclAIM - SOLUTION COMPONENTS

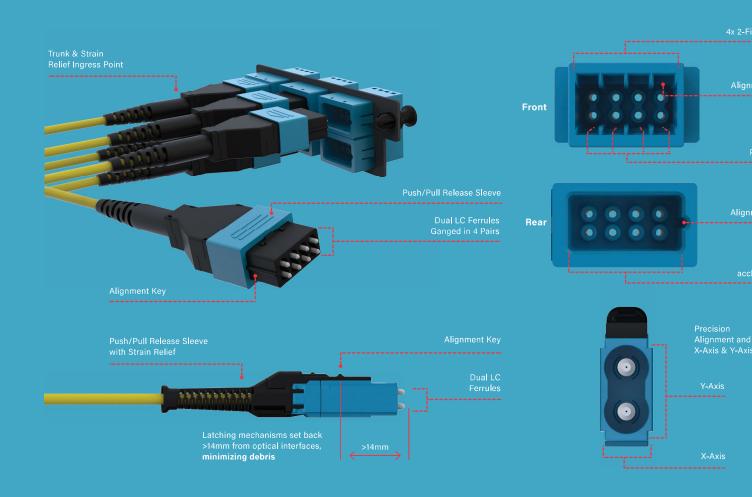



INFINIUM acclA/M - CONNECTOR COMPARISON

Infinium acclAIM utilizes a direct mating breakout – eliminating the need for a cassette to breakout multi-fiber cable.



INFINIUM acclAIM - SIMPLIFIED INTERFACE WITH IMPROVED DENSITY

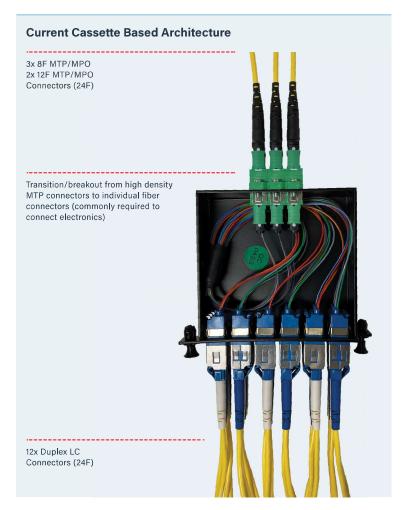

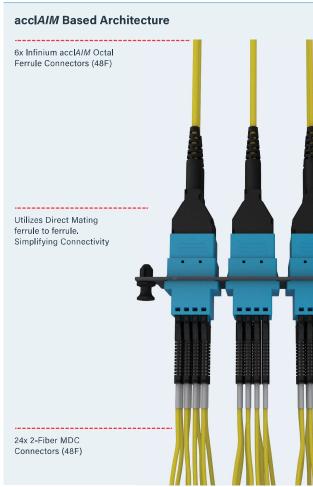

8


LEGRAND,US

INFINIUM acclAIM - DENSITY




HD

High Density

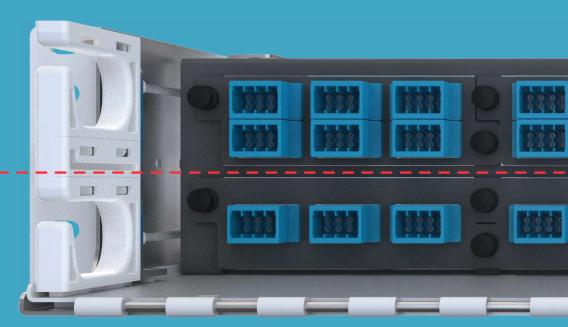


acclAIM Adapters Shown in INFC0

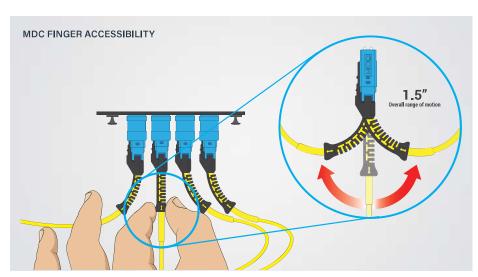

INFINIUM acclA/M - ERGONOMICS ADVANTAGE

- Easy grip and release connectors
- The acclAIM solution delivers more har clearance than LC Patching – acclAIM offers 1.5 in of space vs. 1/8 in of space
- With LC connectors, technicians must a almost an inch further into the cables to the latch vs. the acclAIM solution with to connectors
- Less force required for insertion and re than current connectivity options

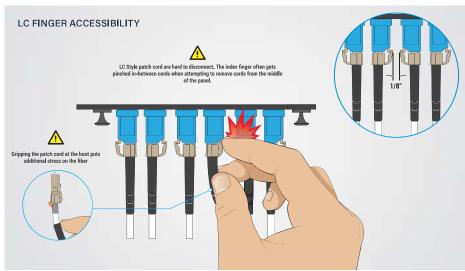

>40%

>60

Faster Patch Cable Install Faster Cable I

TIME STUDIES



ERGONOMICS TIME STUDY VIDEO




MID-I


INFINIUM acclAIM - INSTALL, MAINTENANCE & TESTING ADVANTAGE


- Faster cable installs and removal
- acclA/M polarity is application-defined and can be adapted to nearly any link configuration; preplanned, on-site, or on the fly vs. cassettes which must be pre-planned or reordered to change polarity
- Patch cord polarity switching with acclAIM takes 6 seconds vs. LC Duplex which takes 48 with the potential of lost components acclAIM solution with MDC patch cords saves 42 seconds on average vs. LC duplex and days faster than reordering a cassette to correct polarity
- No cassette to inspect before mating
- No front / rear connector troubleshootingone connection point
- Adapters do not become obsolete if new grades of fiber are developed, can be reused indefinitely, and do not require delicate handling
- Testing is completed with a single link after mating vs. testing both sides of a cassette reducing significant time



MDC POLARITY TIM STUDY VIDEO

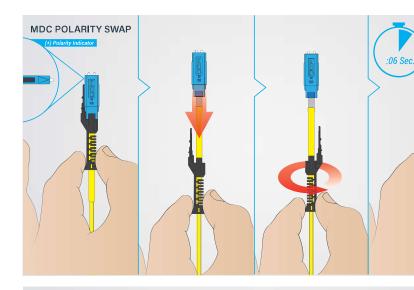

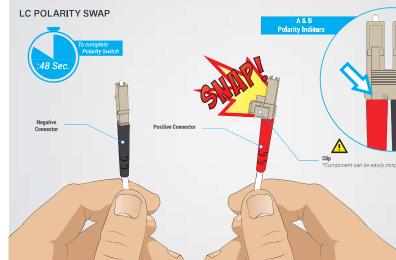

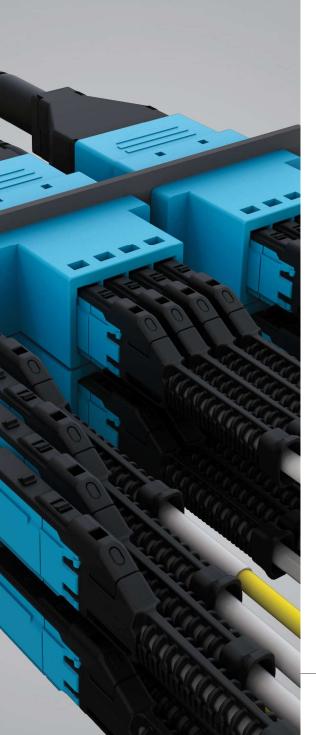


INFINIUM acc|A/M - PERFORMANCE ADVANTAGE

Core Level Performance - Maximizing Optical Headroom

There is an inevitable correlation between maximizing optical performance margins (optical headroom optimizing overall costs from both an operational and procurement perspective – Infinium acclAIM del dramatically more optical headroom than any other pre-terminated solution!

Performance Advantage

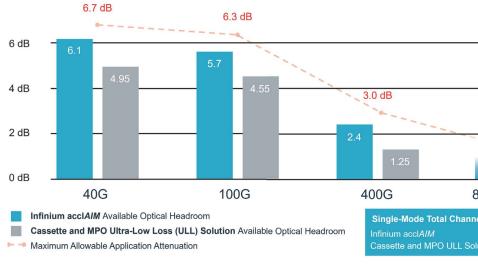


	Industry Standard Pre-Terminated Solution	Infinium accl <i>AIM</i> Core Improvemen
Bit Error Rate (errors over time)	2.35E-07	> 3.6 x
Total Link Loss (dB)	7.20 dB	> 1.0 dB
FEC Corrections (codewords)	5.93E+05	> 1.77 x

<u>Quantum-Effect-Paper - multiLane</u> <u>https://multilaneinc.com/wp-content/uploads/2021/05/Quantum-Effect-Paper.pdf</u>

INFINIUM acclA/M - PERFORMANCE ADVANTAGE

Core Level Performance

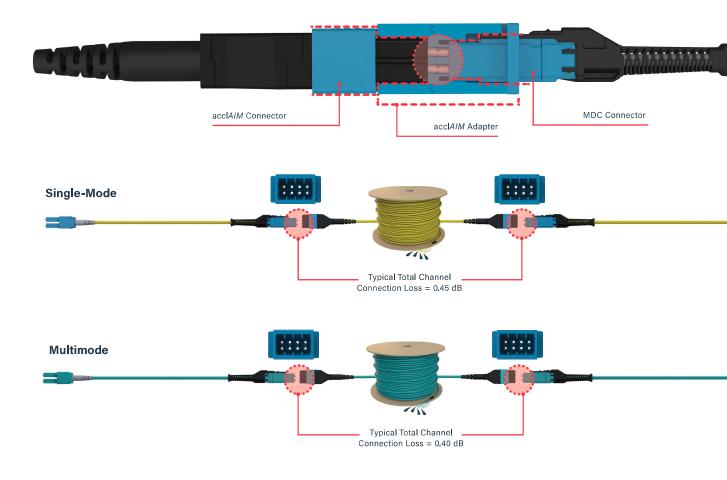

INFINIUM acclAIM SOLUTION - ORDERING INFORMATION

Infinium acclAIM Conversion Adapters

Item Number	Connector Style	Fiber Type	Fiber / Adapter Count	Color
HDFP-AME24LC	acc l A/M / MDC (4)	OM4 (MM)	24 (3 - Adapters)	Aqua
HDFP-AME24QC	acc l A/M / MDC (4)	OM5 (MM)	24 (3 - Adapters)	Lime
HDFP-AME24AC	acc l AIM / MDC (4)	OS2 (SM)	24 (3 - Adapters)	Blue
HDFP-AME48LC	acc l A/M / MDC (4)	OM4 (MM)	48 (6 - Adapters)	Aqua
HDFP-AME48QC	acc l A/M / MDC (4)	OM5 (MM)	48 (6 - Adapters)	Lime
HDFP-AME48AC	acc l A/M / MDC (4)	OS2 (SM)	48 (6 - Adapters)	Blue





Infinium acclAIM Pre-Configured Trunk Cable Assemblies

Item Number	Description	Fiber Type	Fiber Count	Polarity	Jacket Type	Length	UOM
CAMAMC37S5JMM1xxxM(F)	Infinium Core	OS2	8	С	Plenum	XXX	M/F
CAMAMC37S5EMM1xxxM(F)	Infinium Core	OM4	8	С	Plenum	XXX	M/F
CAMAMC37S5HMM1xxxM(F)	Infinium Core	OM5	8	С	Plenum	XXX	M/F
CAMAMC63SAJMM1xxxM(F)	Infinium Core	OS2	24	С	Plenum	XXX	M/F
CAMAMC63SAEMM1xxxM(F)	Infinium Core	OM4	24	С	Plenum	XXX	M/F
CAMAMC63SAHMM1xxxM(F)	Infinium Core	OM5	24	С	Plenum	XXX	M/F
CAMAMC63SEJMM1xxxM(F)	Infinium Core	OS2	48	С	Plenum	XXX	M/F
CAMAMC63SEEMM1xxxM(F)	Infinium Core	OM4	48	С	Plenum	XXX	M/F
CAMAMC63SEHMM1xxxM(F)	Infinium Core	OM5	48	С	Plenum	XXX	M/F









INFINIUM acclA/M PAGE

LEGRAND,US

INFINIUM accIAIM SOLUTION - ORDERING INFORMATION

Infinium acclA/M Pre-Configured MDC Patch Cords

MDC Patch Cords	Performance	Fiber Type	Connector A	Connector B	Polarity	Jacket Type	Length	UO
L1-802JA2EAB0xxxM(F)	Infinium Core	OM4	LC Uniboot	MDC	Method A	Plenum	XXX	M /
L1-802JA2HAB0xxxM(F)	Infinium Core	OM5	LC Uniboot	MDC	Method A	Plenum	xxx	M /
L1-802JA2JYB0xxxM(F)	Infinium Core	OS2	LC Uniboot	MDC	Method A	Plenum	xxx	M /
L1-2J2JA2EAB0xxxM(F)	Infinium Core	OM4	MDC	MDC	Method A	Plenum	xxx	M /
L1-2J2JA2HAB0xxxM(F)	Infinium Core	OM5	MDC	MDC	Method A	Plenum	xxx	M /
L1-2J2JA2JYB0xxxM(F)	Infinium Core	OS2	MDC	MDC	Method A	Plenum	XXX	M /
L3-802JA2EAB0xxxM(F)	Infinium Ultra	OM4	LC Uniboot	MDC	Method A	Plenum	XXX	M /
L3-802JA2HAB0xxxM(F)	Infinium Ultra	OM5	LC Uniboot	MDC	Method A	Plenum	xxx	M /
L3-802JA2JYB0xxxM(F)	Infinium Ultra	OS2	LC Uniboot	MDC	Method A	Plenum	XXX	M /
L3-2J2JA2EAB0xxxM(F)	Infinium Ultra	OM4	MDC	MDC	Method A	Plenum	xxx	M /
L3-2J2JA2HAB0xxxM(F)	Infinium Ultra	OM5	MDC	MDC	Method A	Plenum	xxx	M /
L3-2J2JA2JYB0xxxM(F)	Infinium Ultra	OS2	MDC	MDC	Method A	Plenum	XXX	M /

NOTE: For length, replace XXX with three digit length measure (example 003 = 3, 010 = 10, or 100 = 100) For Unit of Measure (UOM), select (M) for Meters, or (F) for Feet

Infinium HD-E Enclosure - M4 Drawer Face

Item Number	Description
INFC01U-M4-E	Infinium HD-E Rack Mount Enclosure 1U, M4 Drawer Face
INFC02U-M4-E	Infinium HD-E Rack Mount Enclosure 2U, M4 Drawer Face
INFC04U-M4-E	Infinium HD-E Rack Mount Enclosure 4U, M4 Drawer Face

High-Density Flush Mounting Fiber Patch Panel

Item Number	Description
RFPHD01U	High-Density Flush Mounting Fiber Patch Panel, 1U
RFPHD02U	High-Density Flush Mounting Fiber Patch Panel, 2U



RFPHD02U

Llegrand®

Data, Power & Control

60 Woodlawn Street West Hartford, CT 06110 800,934,5432 www.legrand.us





