



Smart Building Technology
and Hybrid Work Solutions

Cisco Talent and Collaboration Centers Casual Huddle Room Design Guide



Introduction

Overview and Intent

This document provides guidance on how to effectively design the Casual Huddle Room.

This design brings space layout, technology, and furnishings together to create an optimal experience for those present locally and for remote attendees.

Each customer project is unique. Thus, it is important to involve local facilities teams, workplace design resources, architects and space designers, IT, and a Cisco-certified integrator. The collective goal is to finalize the details of any design, verify the applicability and address any local concerns – electrical/mechanical, orientation and location of the room within the floor plan, accessibility, circulation, and external factors such as noise, light, and temperature.

Room Description

With a capacity of 3-4 individuals, the Casual Huddle Room is specifically designed for informal meetings with colleagues, even when some are remote.

This space has two technology options, a Cisco Board Pro 55 or the Cisco Room Bar with a single 55” display. The option selected should be based on how the space is intended to be used. If whiteboarding or annotation of displayed content is required, the Board 55 Pro option is preferred.

Supported Collaboration Activities

	Cisco Board Pro 55 Option	Cisco Room Bar Option
Information Sharing	✓	✓
Brainstorming	✓	
Team Building		
Decision Making	✓	✓

Table of Contents

- ▶ Introduction 2
- ▶ Visualization of key Cisco elements 3
- ▶ Certified Third Party Displays 4
- ▶ Video Device Mounting Options 5
- ▶ Composite Plans 6
- ▶ Room Layout 7
- ▶ Reflective Ceiling Plan 8
- ▶ Room Elevations 9
- ▶ Acoustical Treatment 11
- ▶ Power & Data 12
- ▶ Exploded IT Diagrams 13
- ▶ Connectivity View 15
- ▶ IT/OT Reference Architectures 16
- ▶ IT/OT Bill of Material 17
- ▶ Commissioning–User Acceptance Testing 18
- ▶ Design Files & Resources 19

Visualization of key Cisco elements

Option 1



Cisco Board Pro 55
Adjustable mount recommended



Cisco Room Navigator for Wall


Option 2



Single 55" Display and Display Mount
LG / Panasonic / Samsung / Sony



Cisco Room Bar

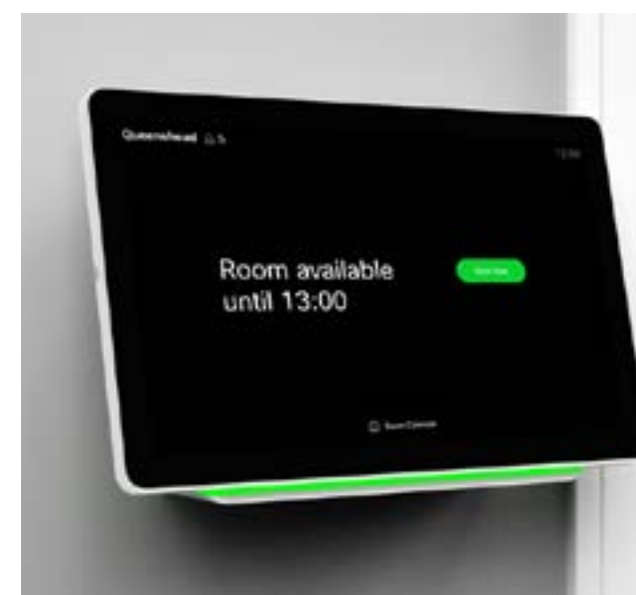

Cisco Room Navigator for Wall



Cisco Room Navigator for Table

Certified Third Party Displays



Webex certified displays have been tested for compatibility and robustness of their video interfaces, optical characteristics, and basic security practices.

When connected to a Cisco collaboration device they will automatically reconfigure to the optimal configuration already tested and verified.

This list of verified devices was update on August 21, 2024. For up to date information on certified and compatible Cisco collaboration device partner offers, click on the link below.

Vendor	Product or Series	Firmware version
Samsung	QMB	1040.7
Samsung	QBB	1040.7
Samsung	QMC	1040.4
Panasonic	EQ2	2.40
LG	UL3J	03.08.41
LG	UH5J	03.24.01
LG	UR640S	03.17.00
LG	UM5K	3.70.30
Sony	BZ30J, BU30J, BZ35J, BU35J, BZ40H, BU40H, BZ40J, BU40J	6.5929
Sharp/NEC	M751, M861, M981	1.200
Sharp/NEC	MA431, MA491, MA551, P435, P495, P555	3.203
Sharp	PN-LA652, PN-LA752, PN-LA862	1.112

Video Device Mounting Options

Mounting options vary based on technology selection.

Cisco Board Pro 55

If the wall is blocked, the optimal solution is to use a manual or electric adjustable mount, allowing end users to use the device in both a standing and seated position. If the wall is not blocked, then there are floor stand units that only require tethering to the wall. If the device is only going to be used in a standing position, the wall mount kit from Cisco is the best solution.



Cisco Room Bar

With the Cisco Room Bar option, the display is positioned at a fixed height. Thus it is optimal that a standard display mount is used. This will, however, require that the wall be blocked, and electrical/data elevated to a height that will conceal it behind the mounted display. If there isn't an option to block and/or move electrical/data, some specialty A/V manufacturers offer low-profile credenzas that can be used to eliminate the need to mount the display directly to the wall.




Composite Plans

Option 1: Cisco Board Pro 55


Option 2: Cisco Room Bar

Graphics Symbols

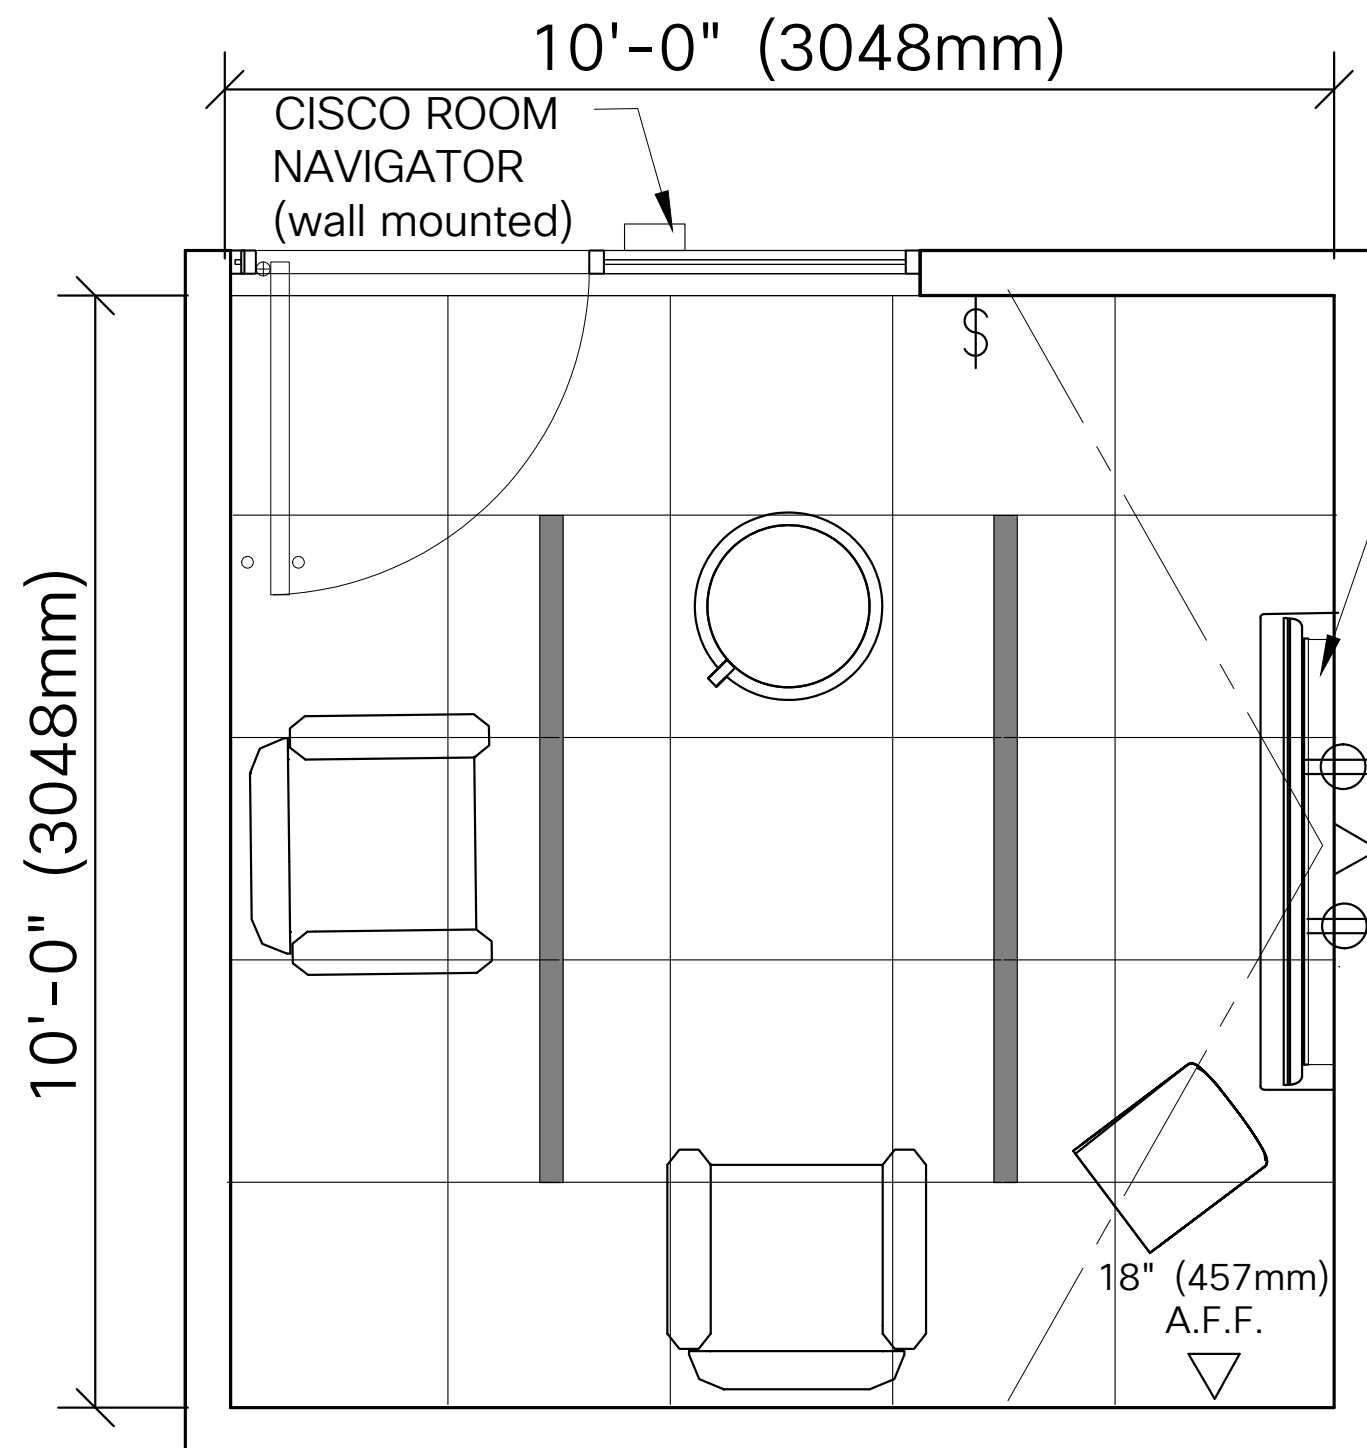


CISCO BOARD PRO 55" DISPLAY WITH ADJUSTABLE SALAMANDER LIFT

[MAX. HT. OF SCREEN TO 6'-0" (1829mm) A.F.F.]

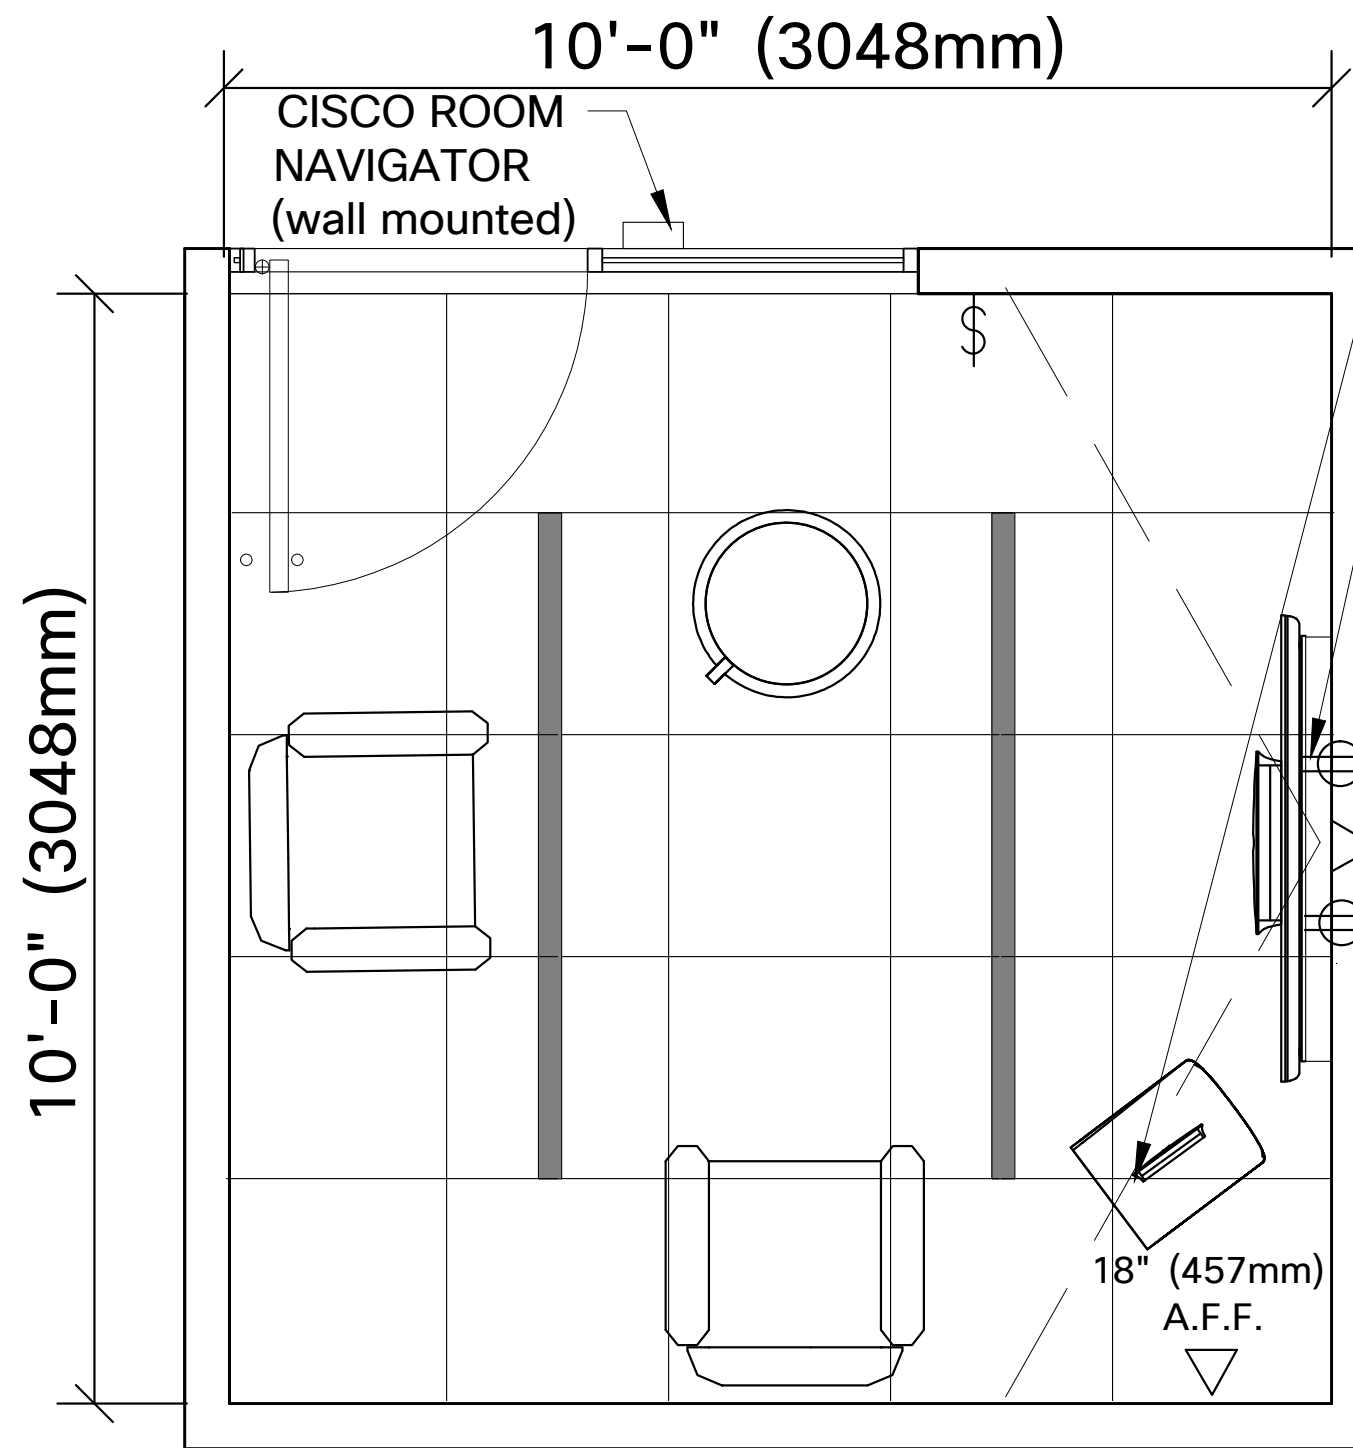


CISCO ROOM NAVIGATOR (table top) TO CONNECT TO DEVICE OR WALL DATA PORT

CISCO ROOM BAR WITH SINGLE 55" DISPLAY WITH FIXED WALL MOUNT

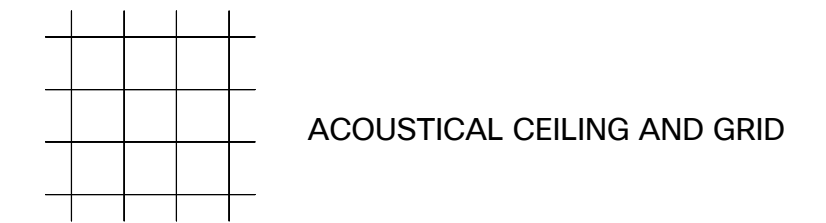

LIGHT FIXTURES



FURNITURE SYSTEMS MOUNTED DEVICES




POWER AND COMMUNICATION


WALL MOUNTED DEVICES




NOTE: PROVIDE SOLID BLOCKING IN WALLS FOR ALL WALL MOUNTED EQUIPMENT & DEVICES

Room Layout


 The furniture shown in this design is there to indicate the scale of the space. The selection of specific furniture elements should be based on local preference and how the room is planned to be used.

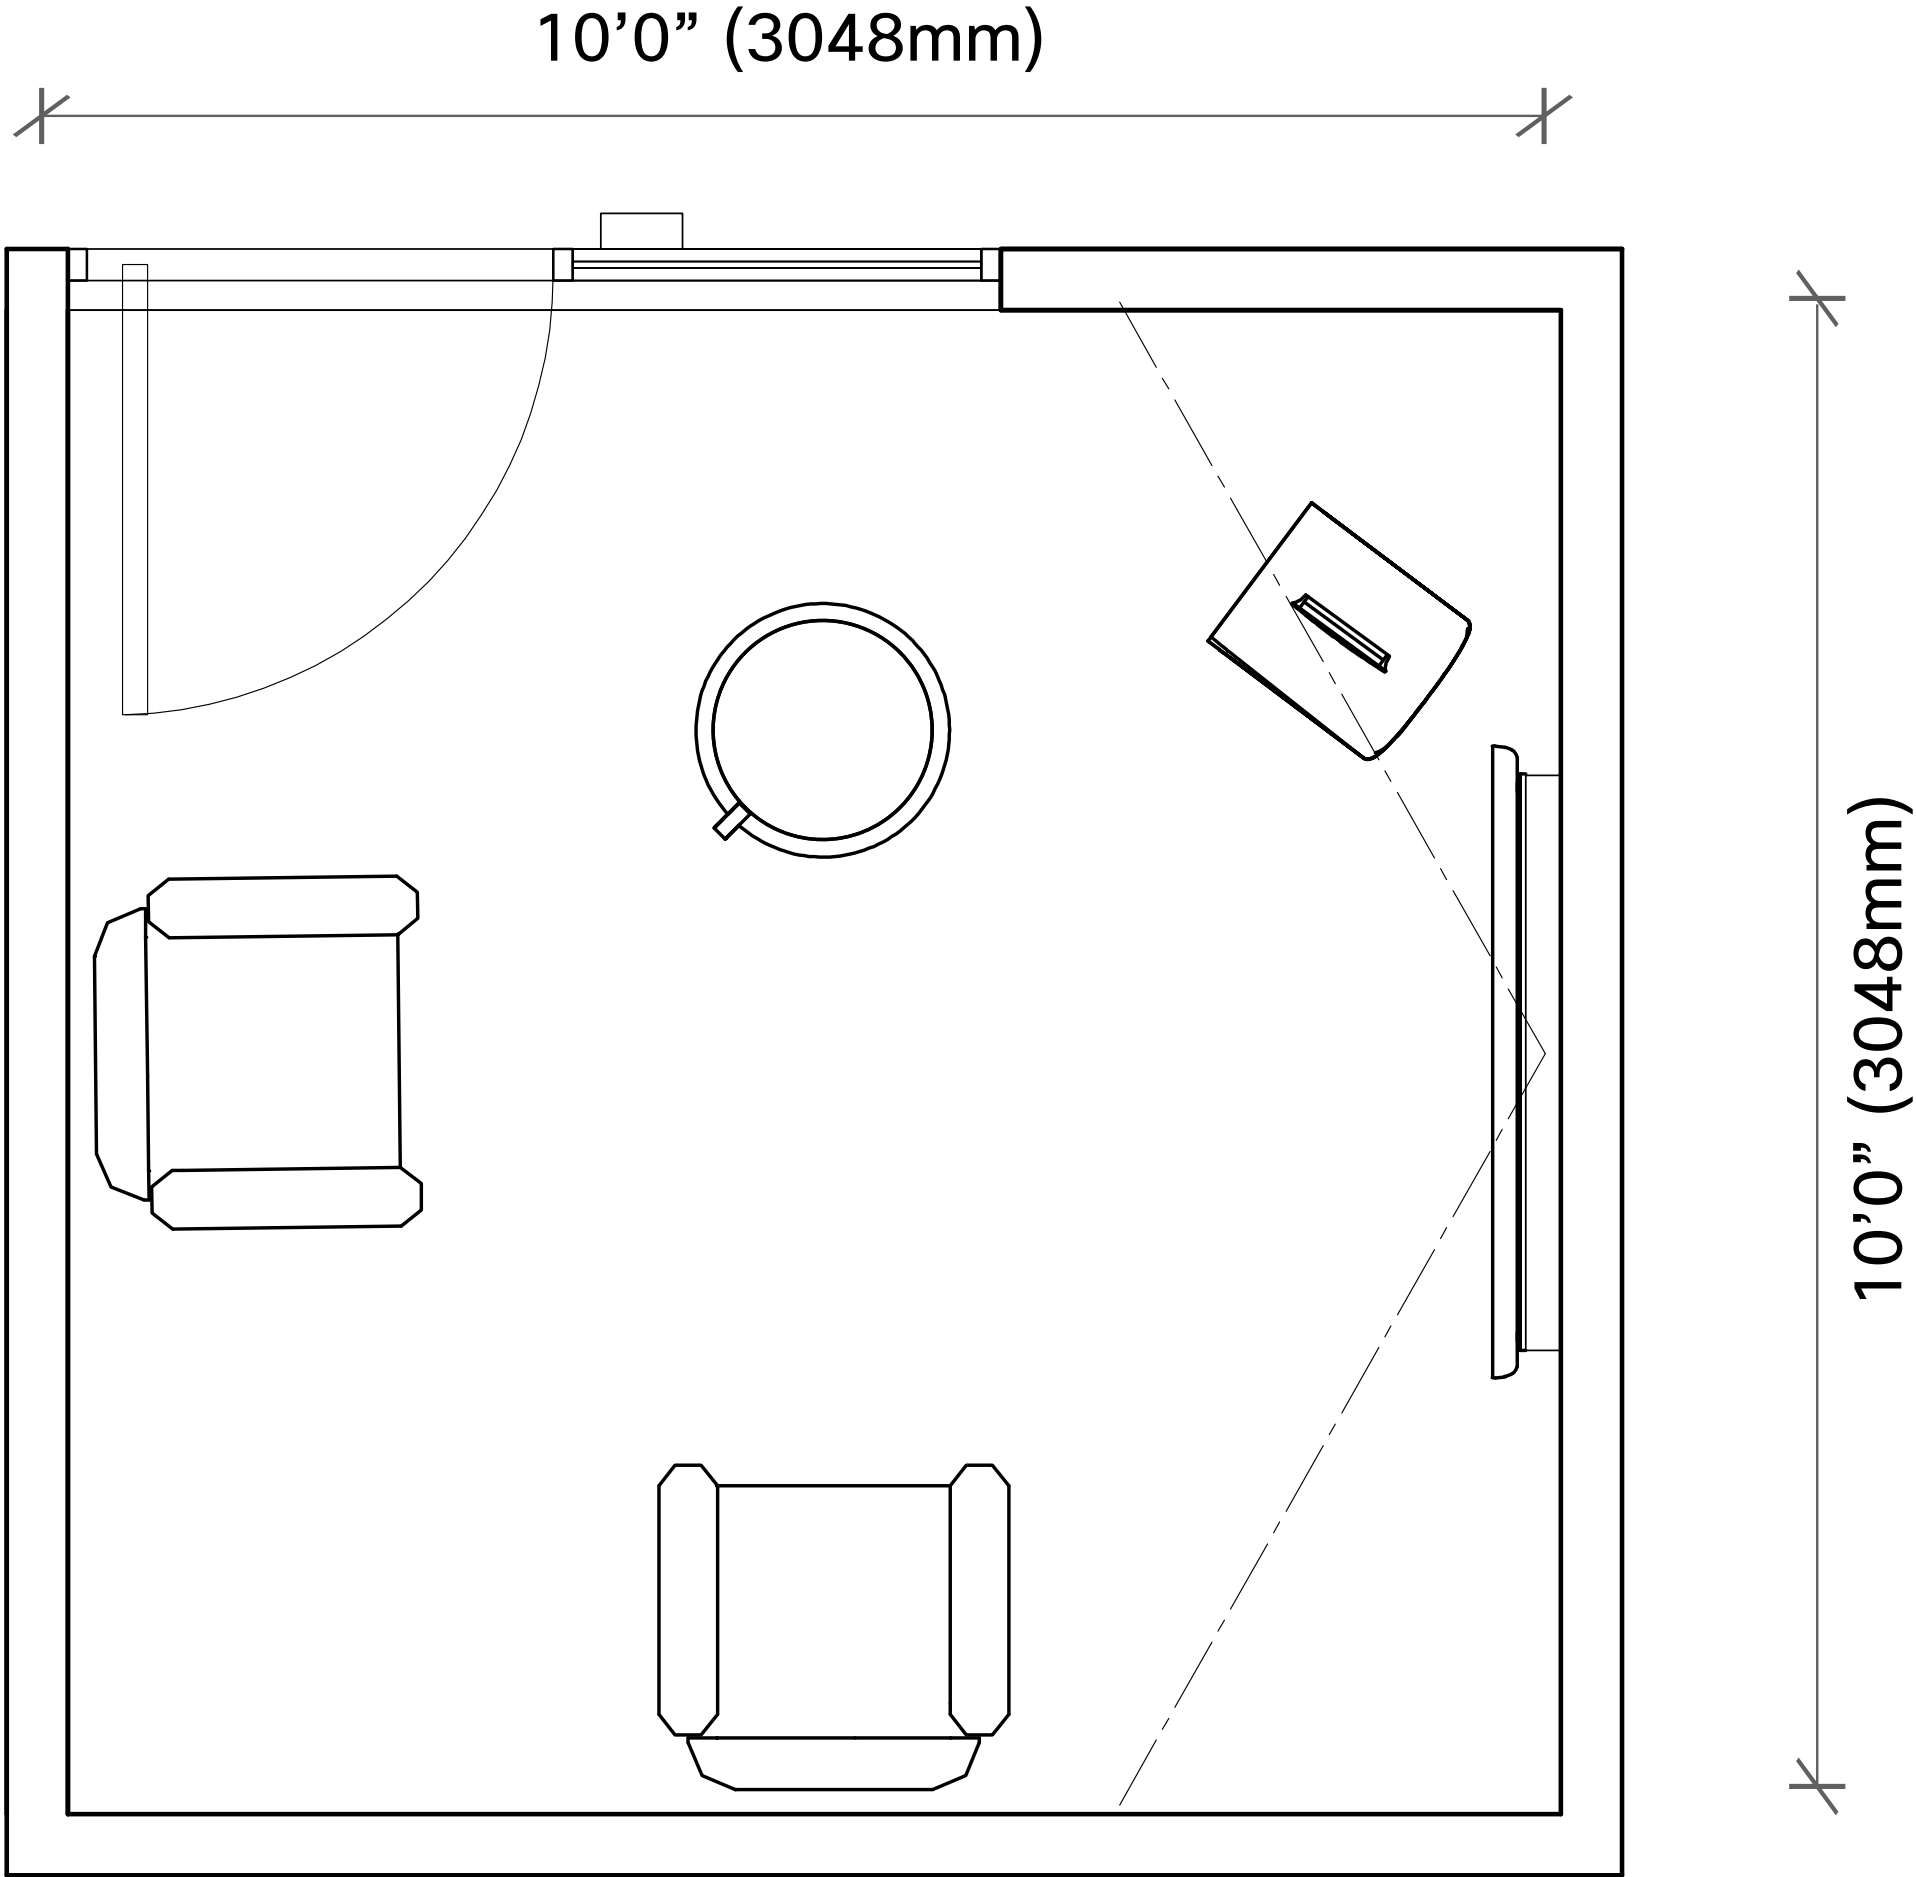

Reflective Ceiling Plan

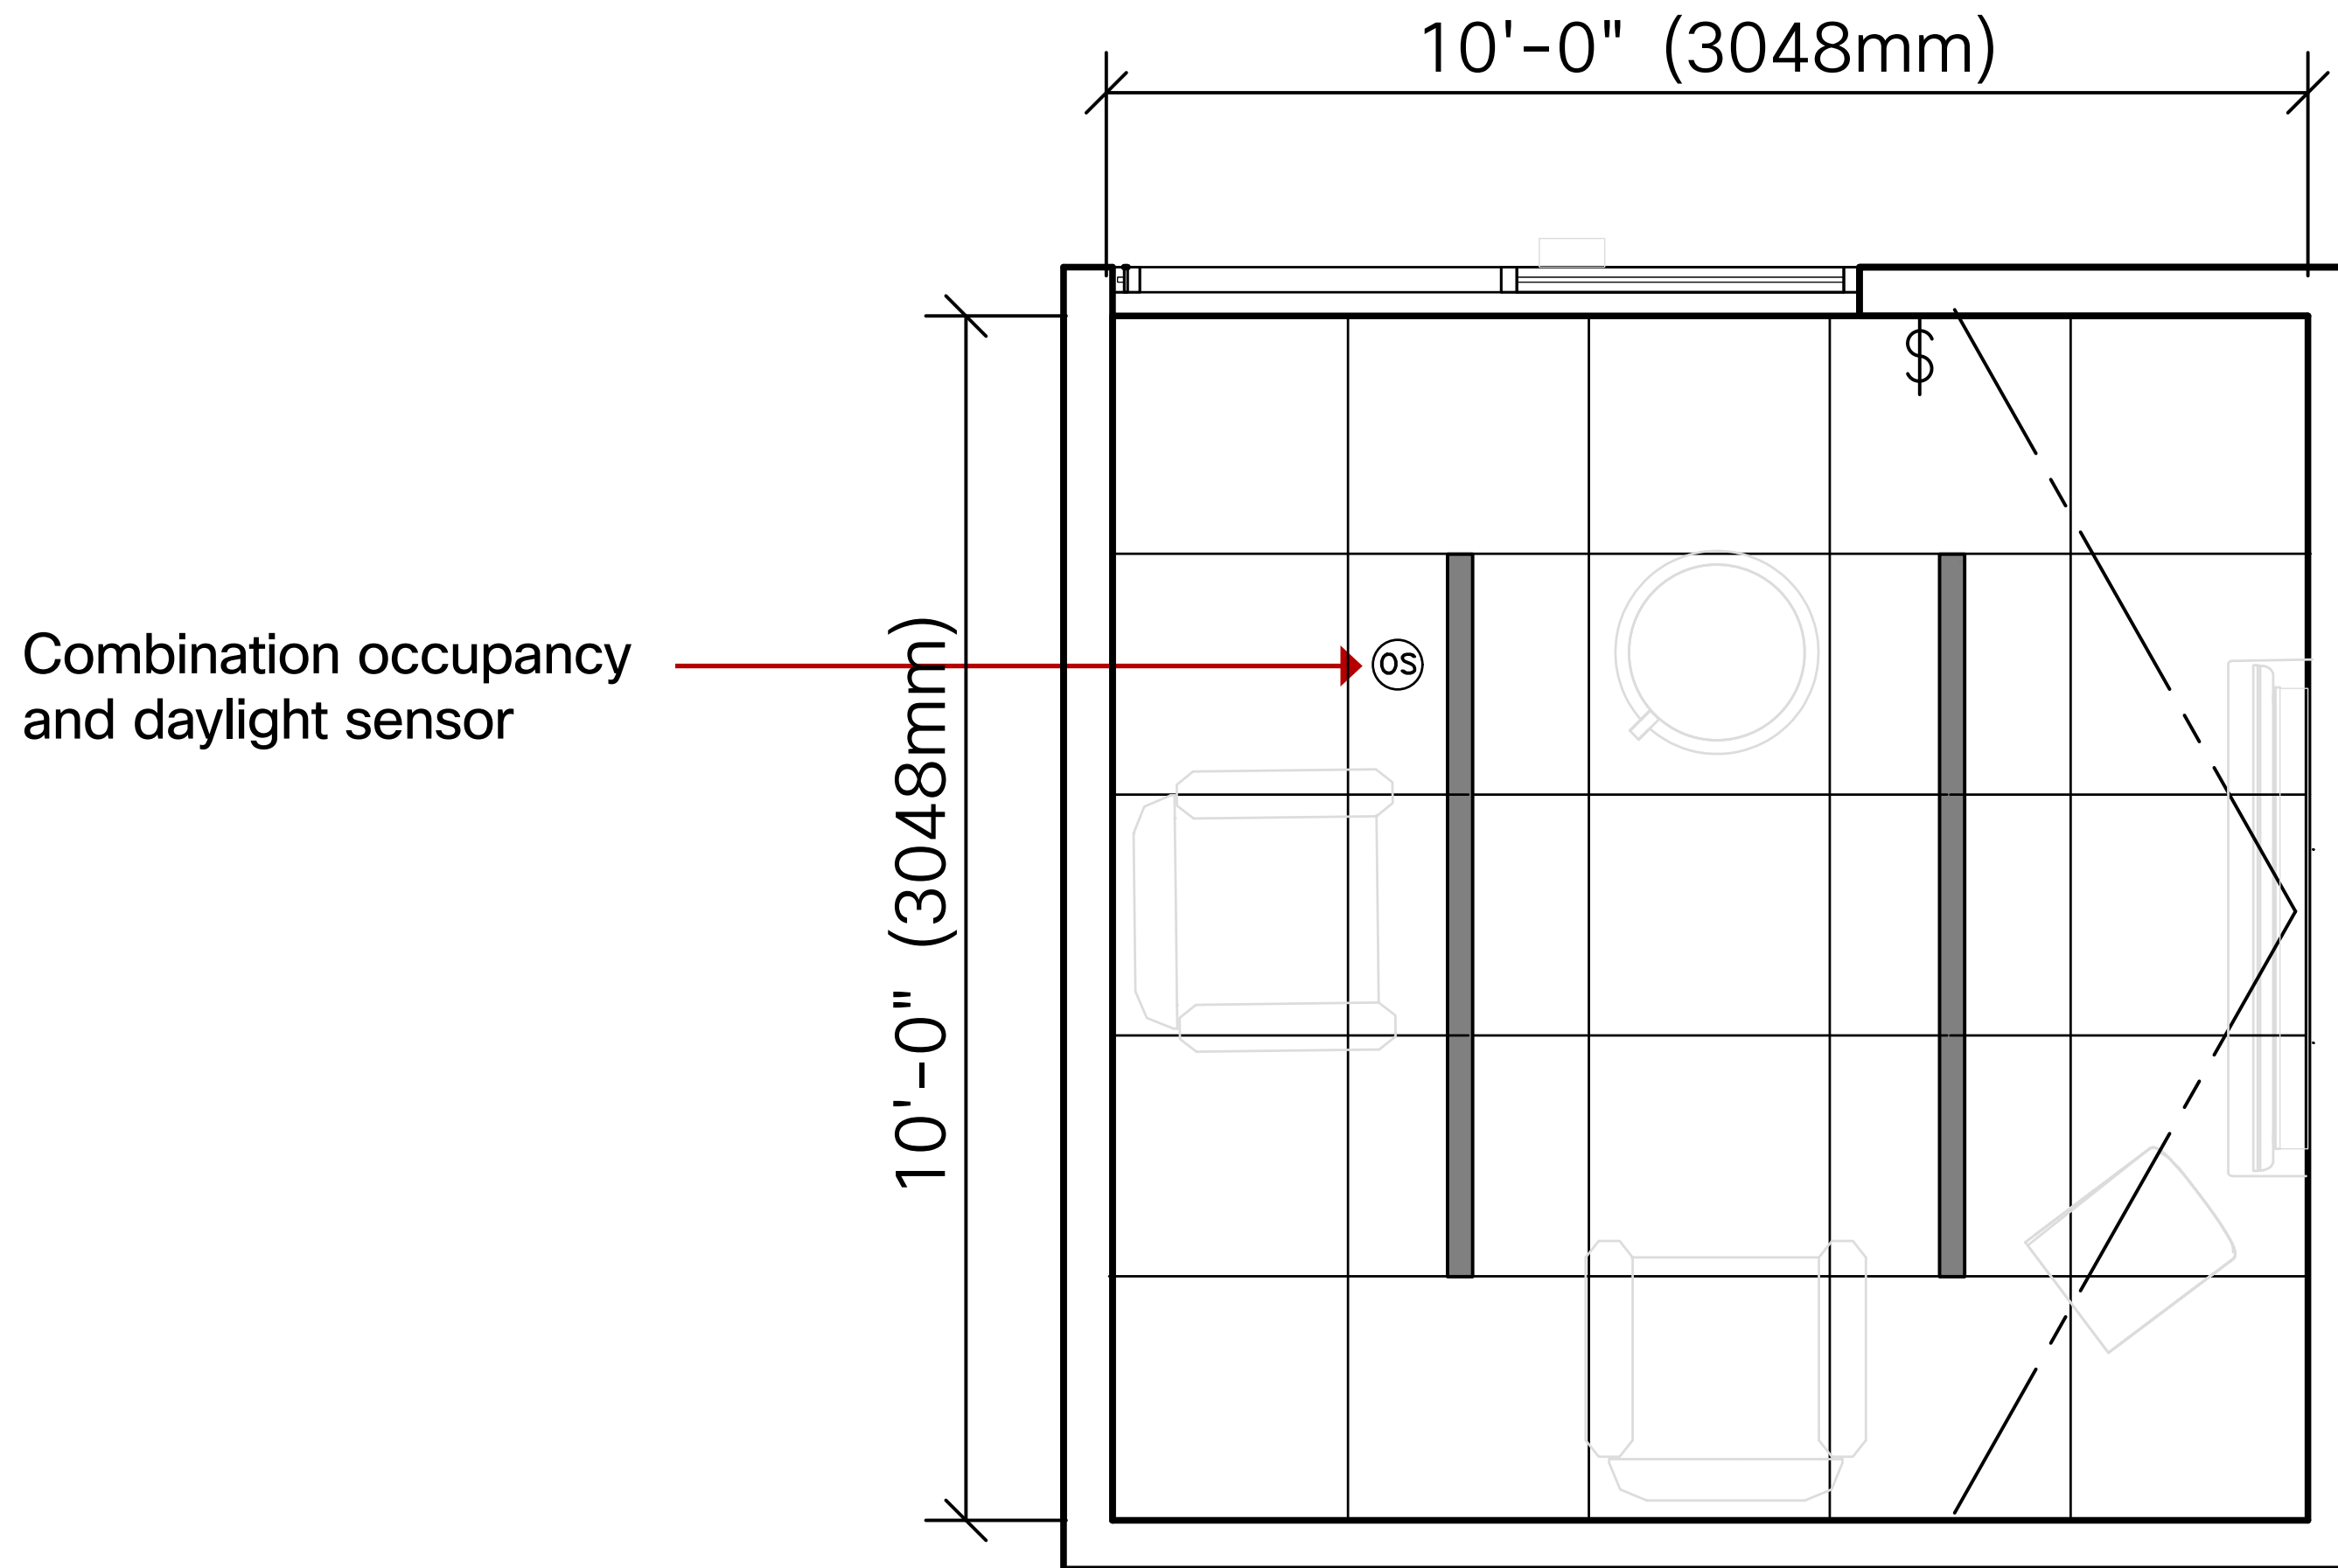


Graphics Symbols



ACOUSTICAL CEILING AND GRID

LIGHT FIXTURES



LIGHT FIXTURE

POWER AND COMMUNICATION

CEILING MOUNTED DEVICES



ROOM OCCUPANCY SENSOR


WALL MOUNTED DEVICES




LIGHT SWITCH

Room Elevations

Construction Elevation

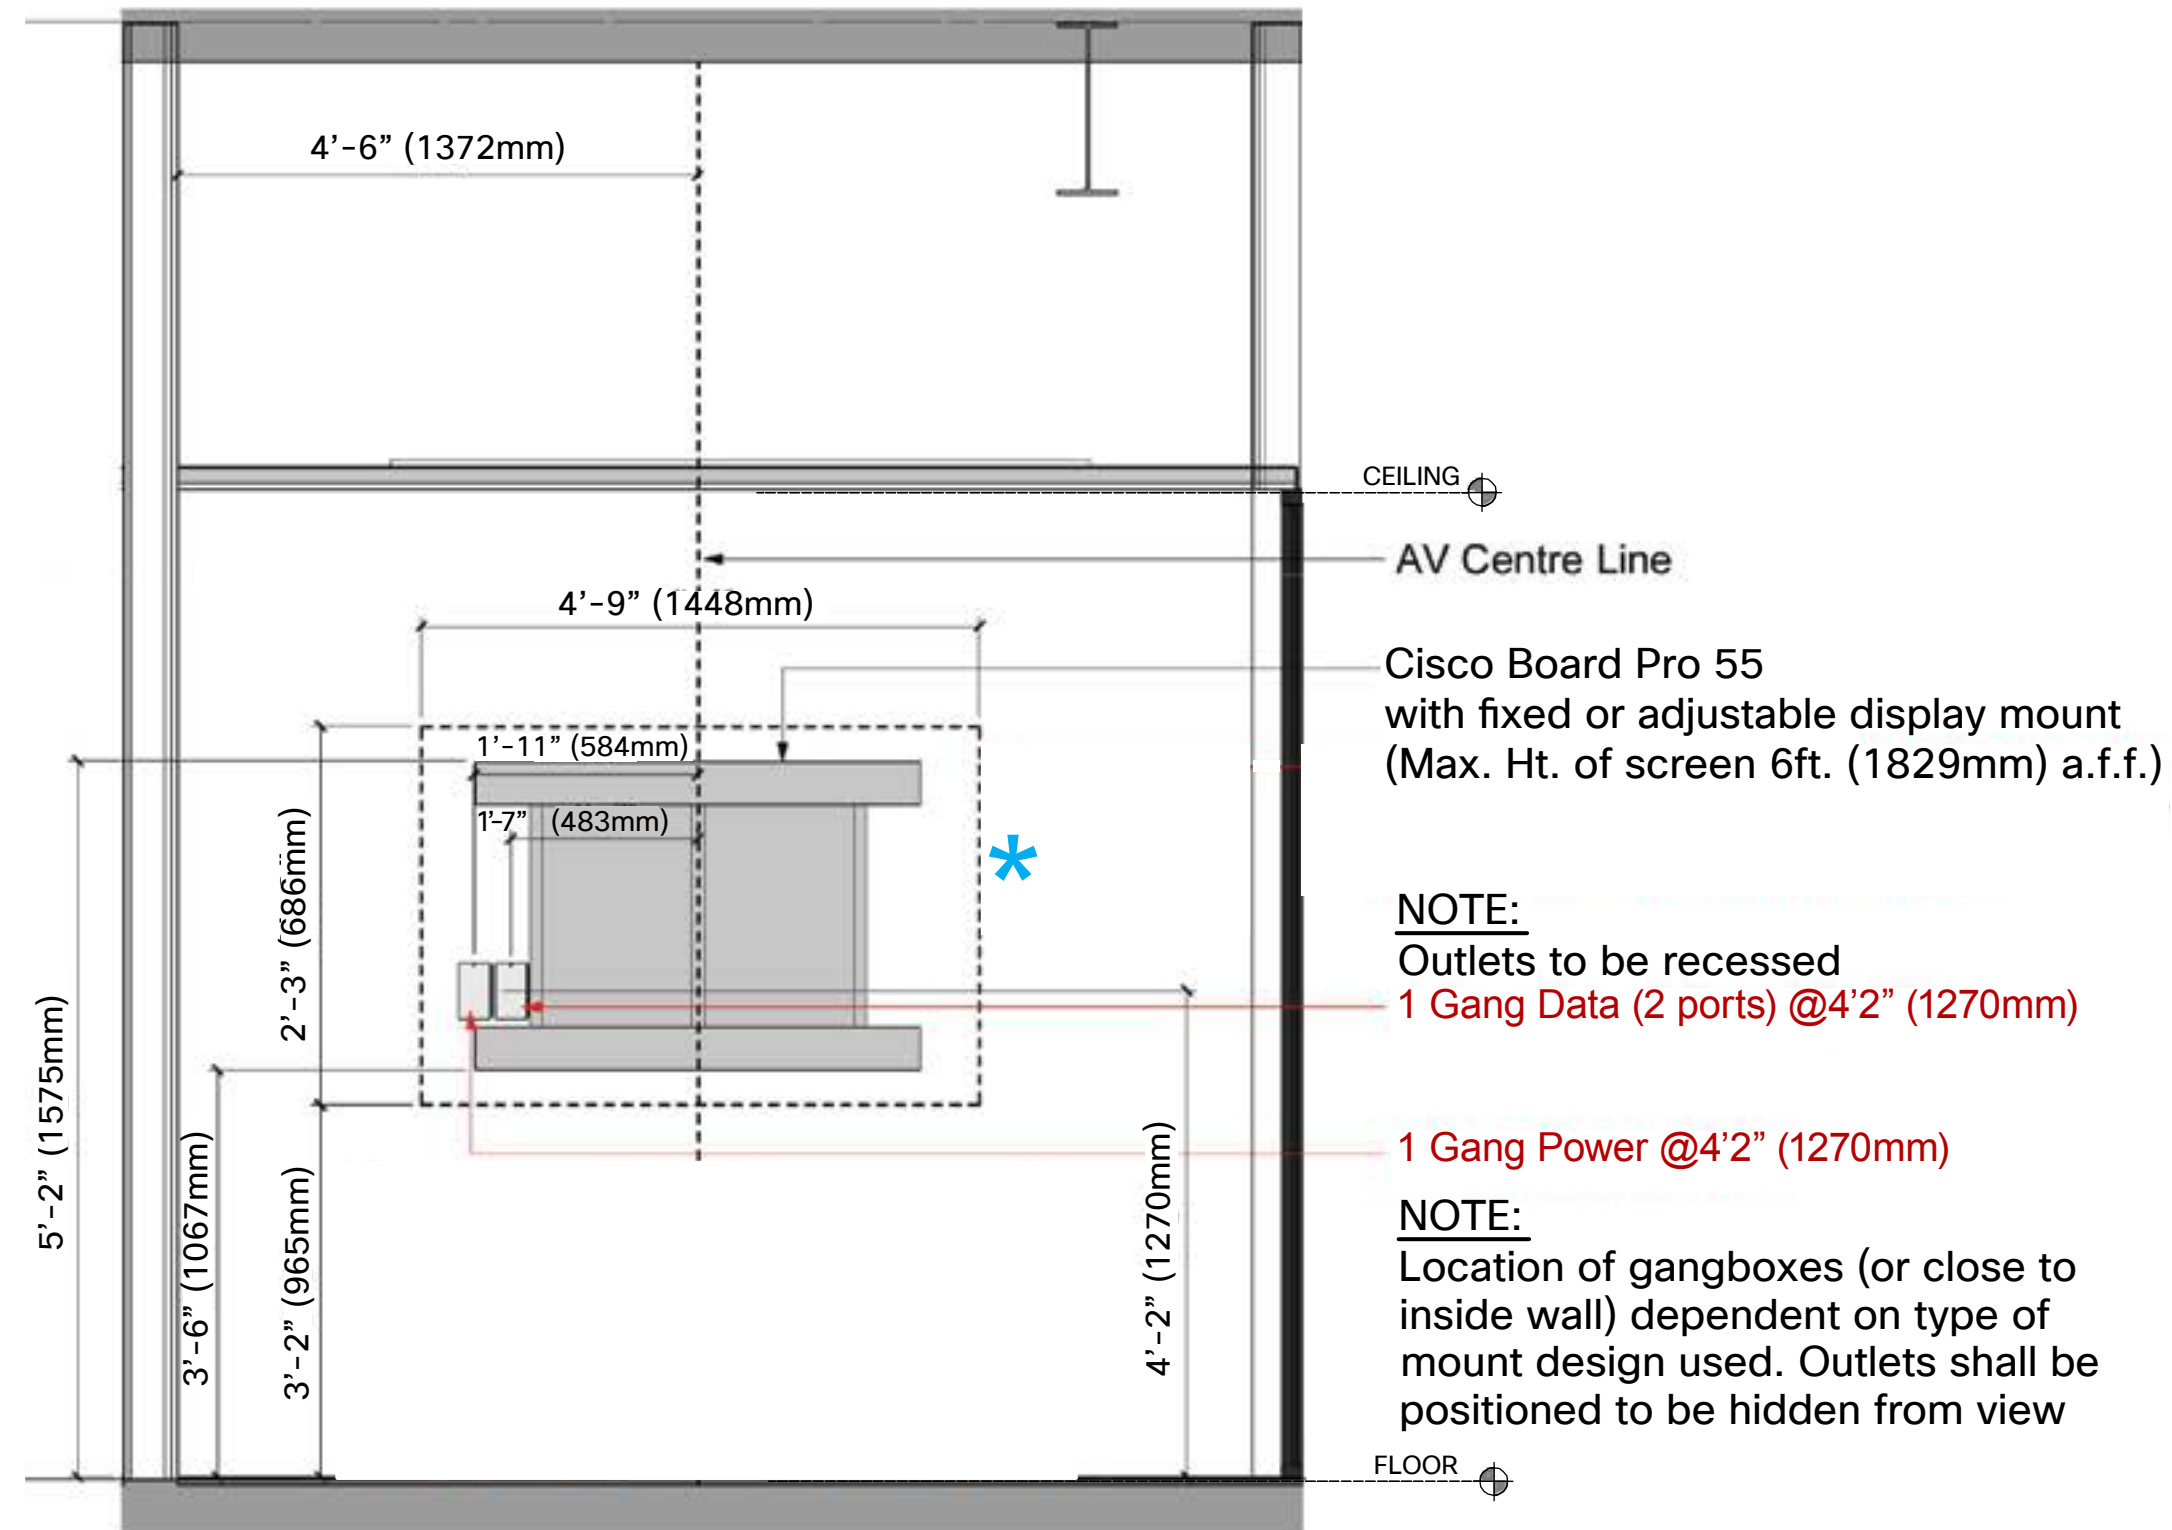


Front Elevation

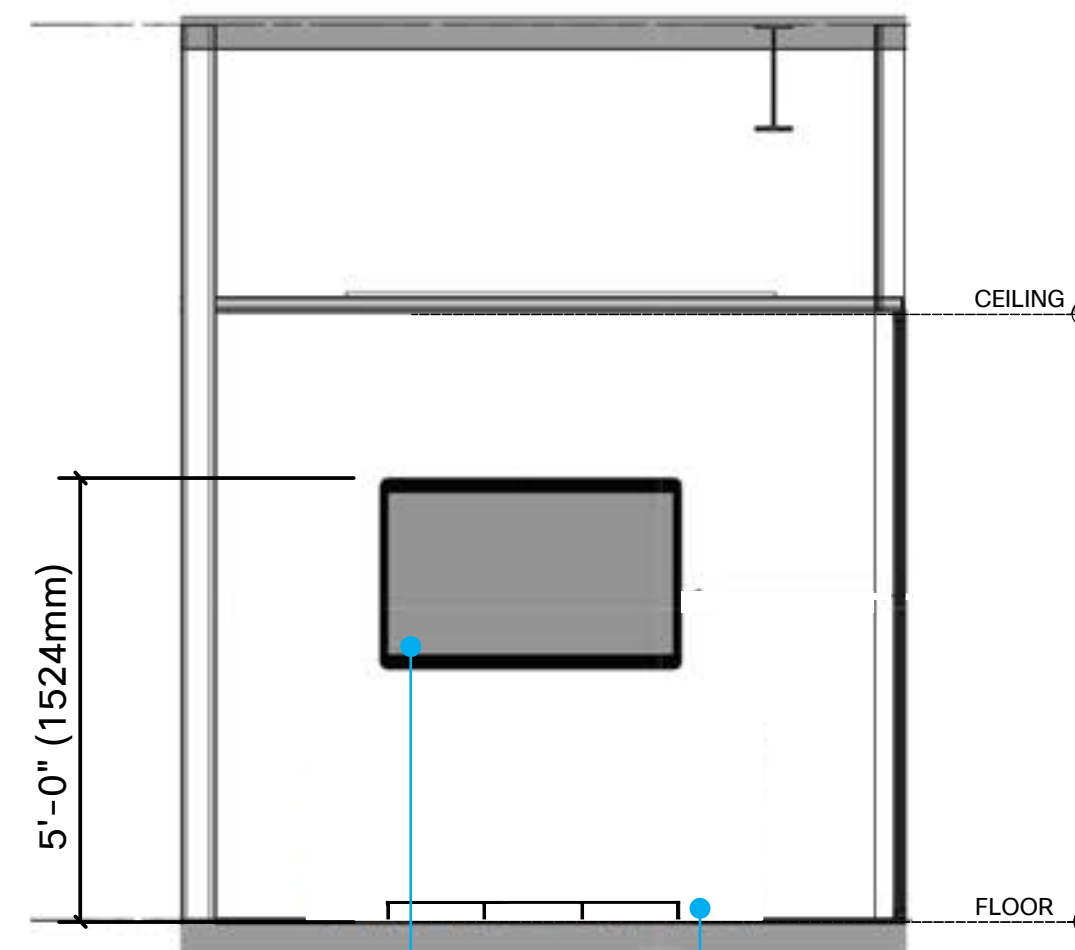

Cisco Board Pro 55 with fixed or adjustable display mount

Depending on the wall mount used, some building codes may require the addition of a cane rail below the device.


Side Elevation

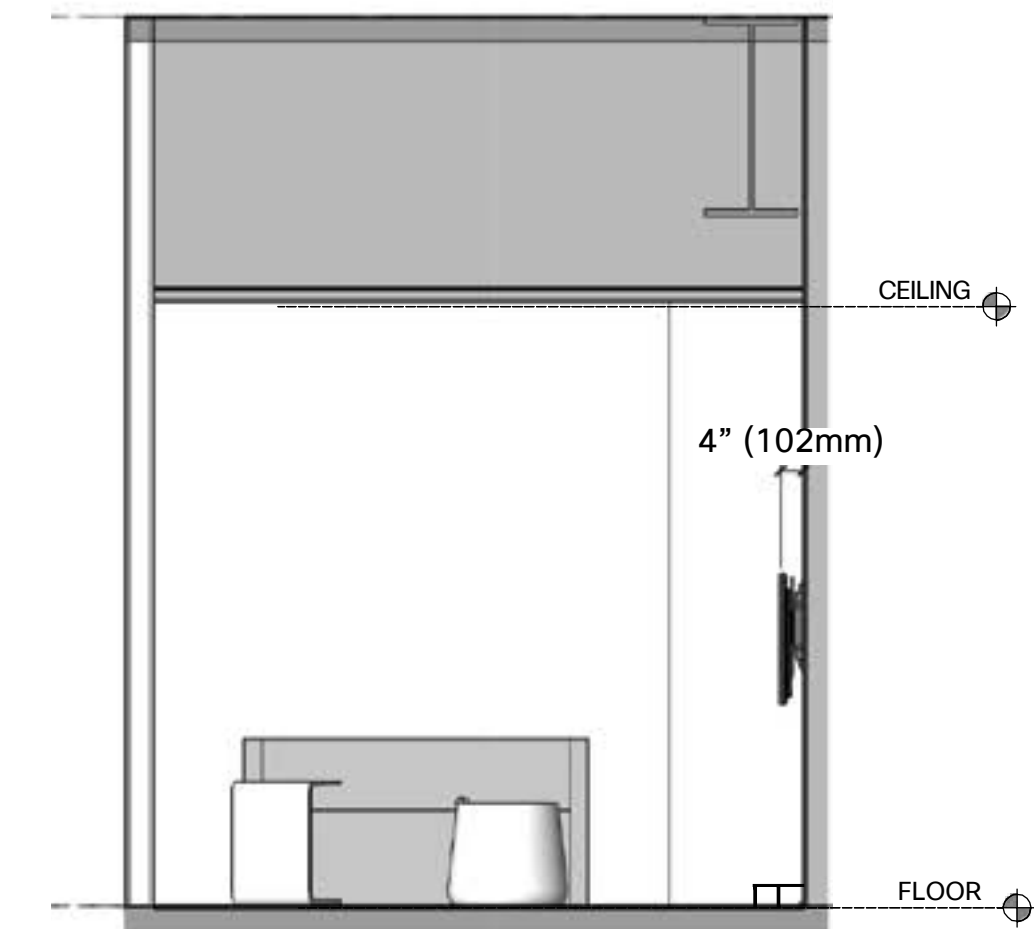


* 11-Ply (or similar approved), prior to screen installation. Steel fixings must be able to support screen specifications. Wall should be made good to match existing wall finish.

Room Elevations


Construction Elevation

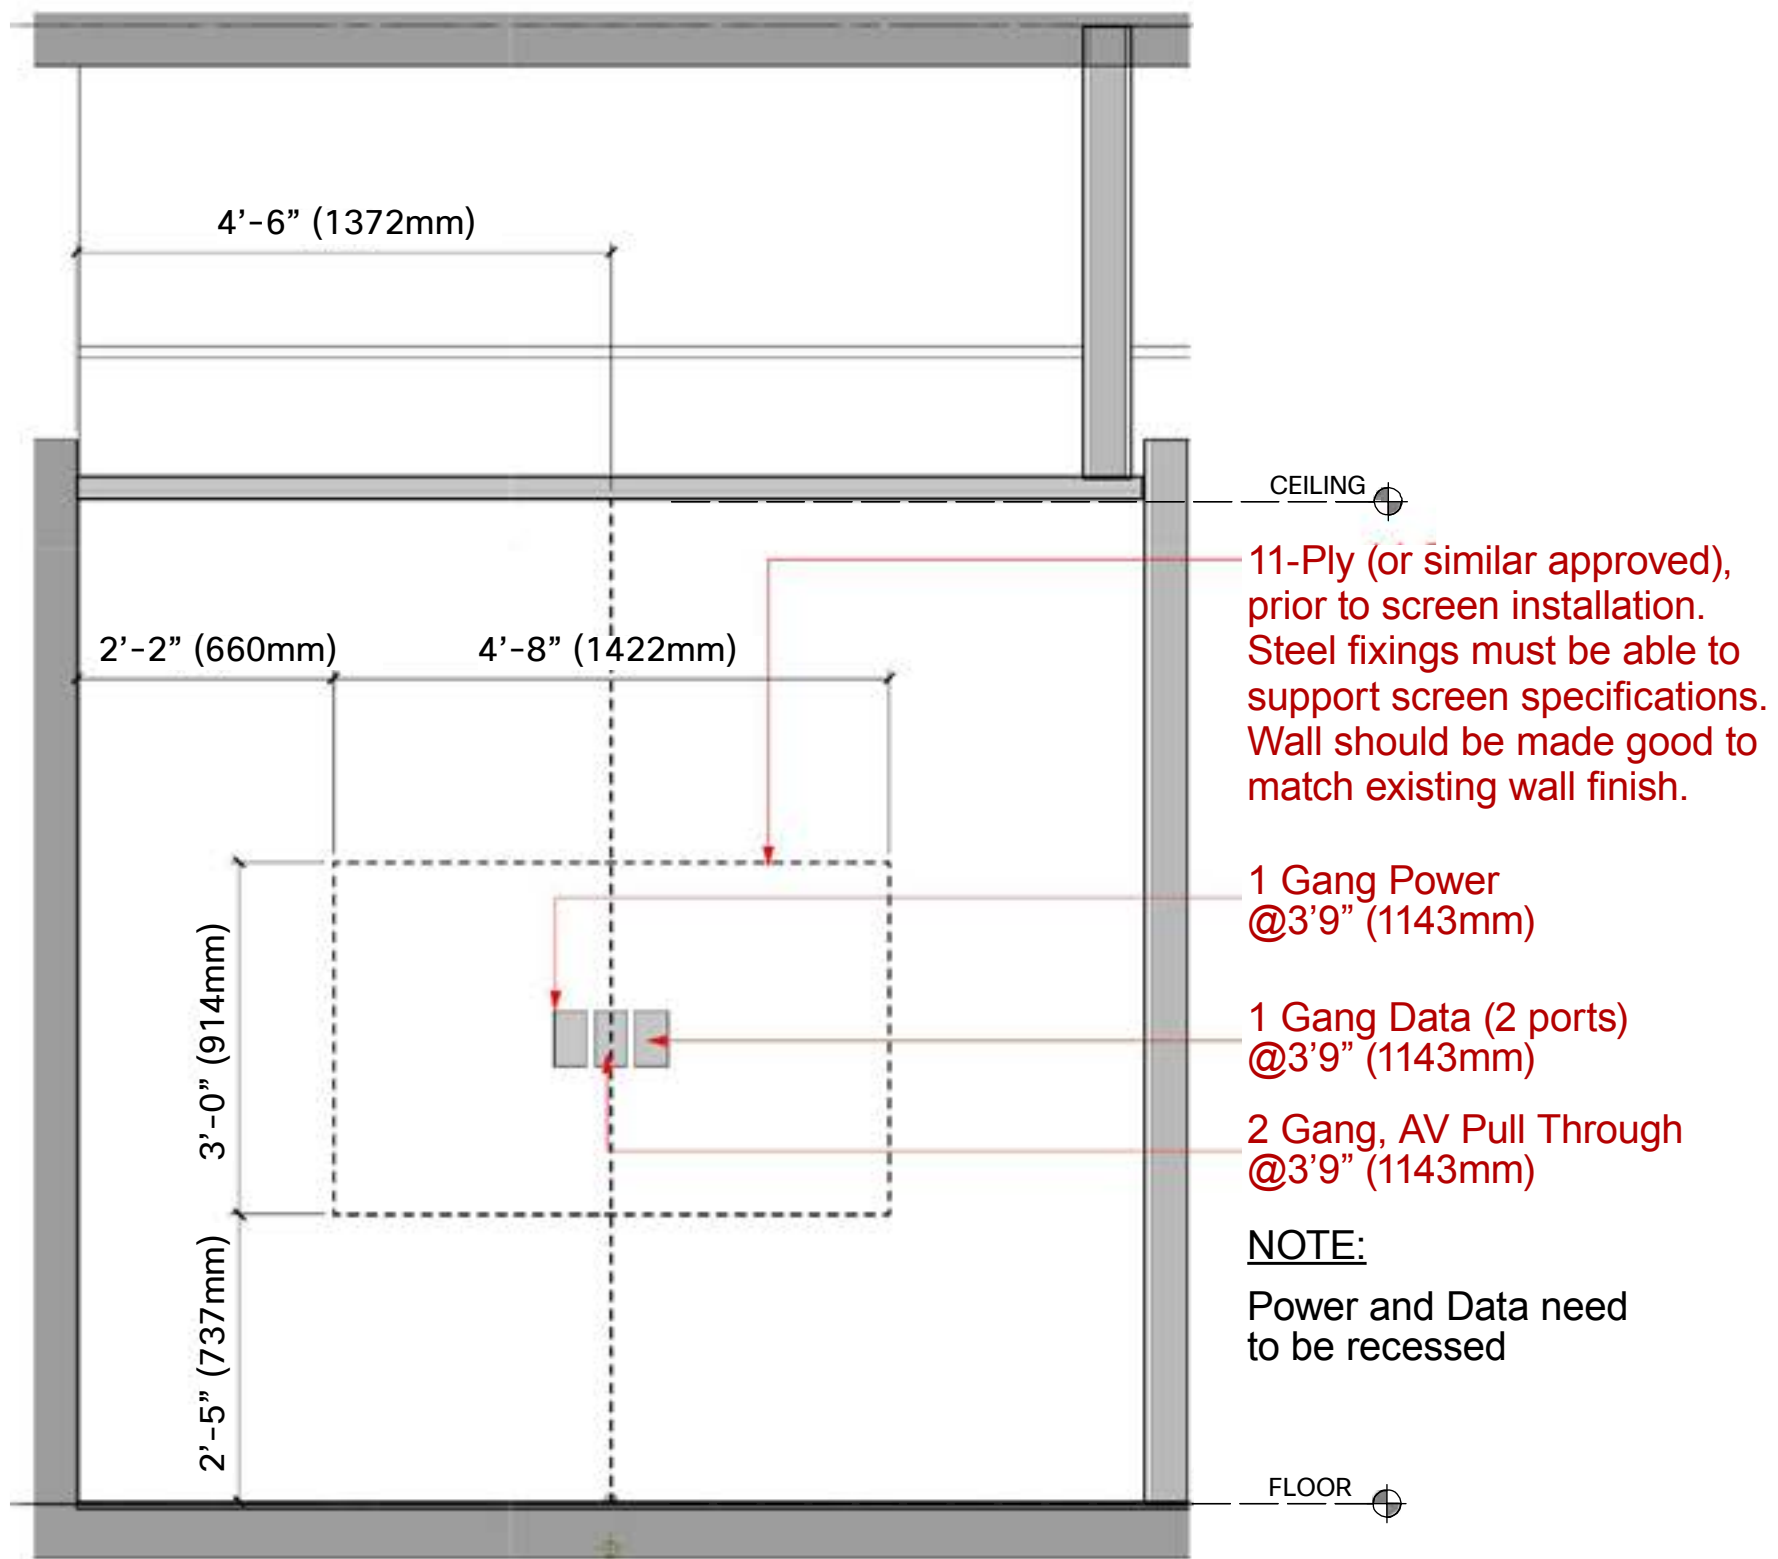


Front Elevation

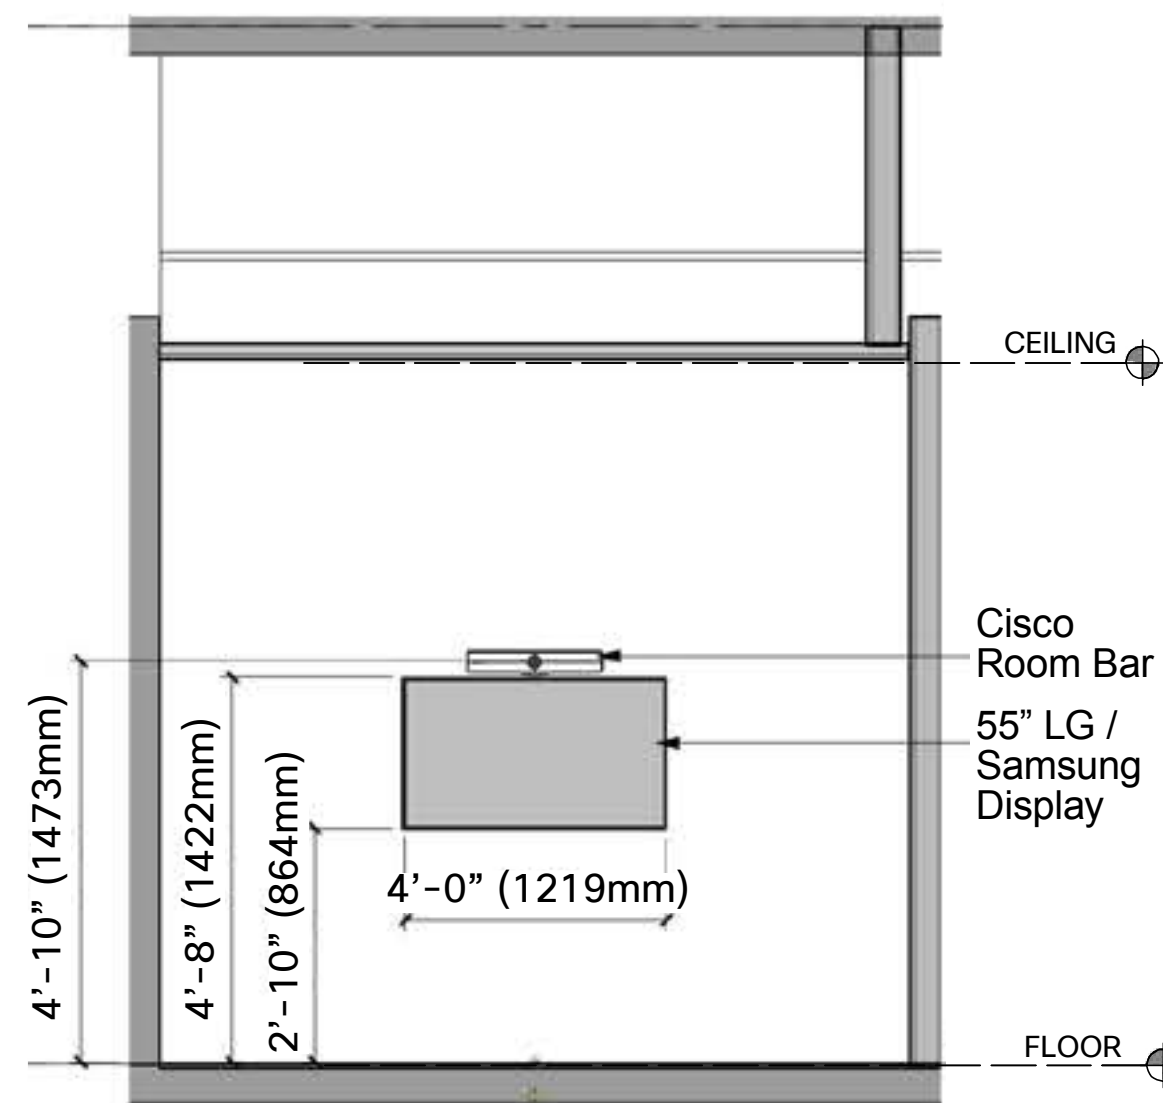

Side Elevation

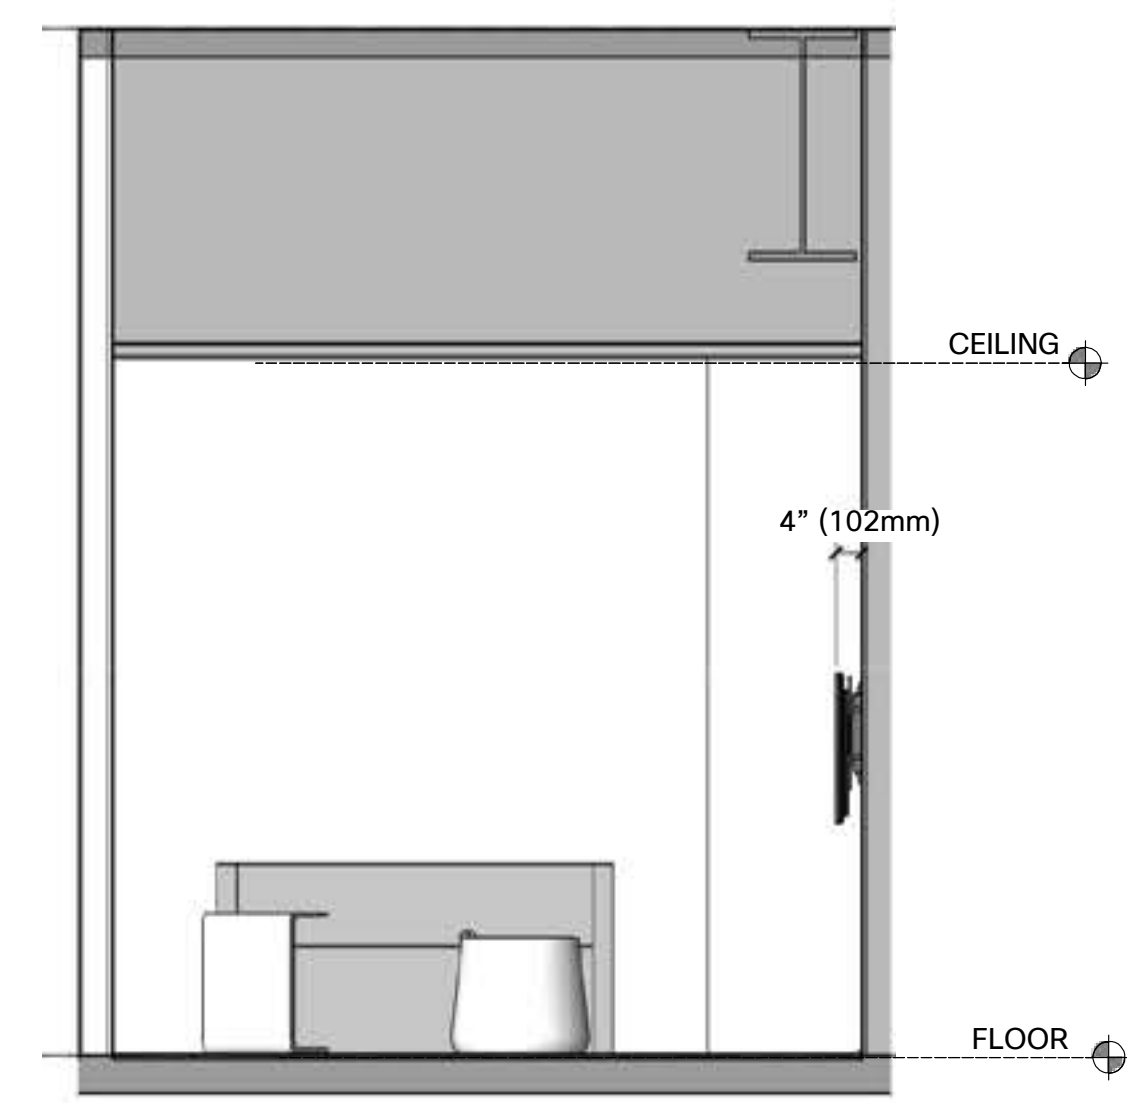

Acoustical Treatment

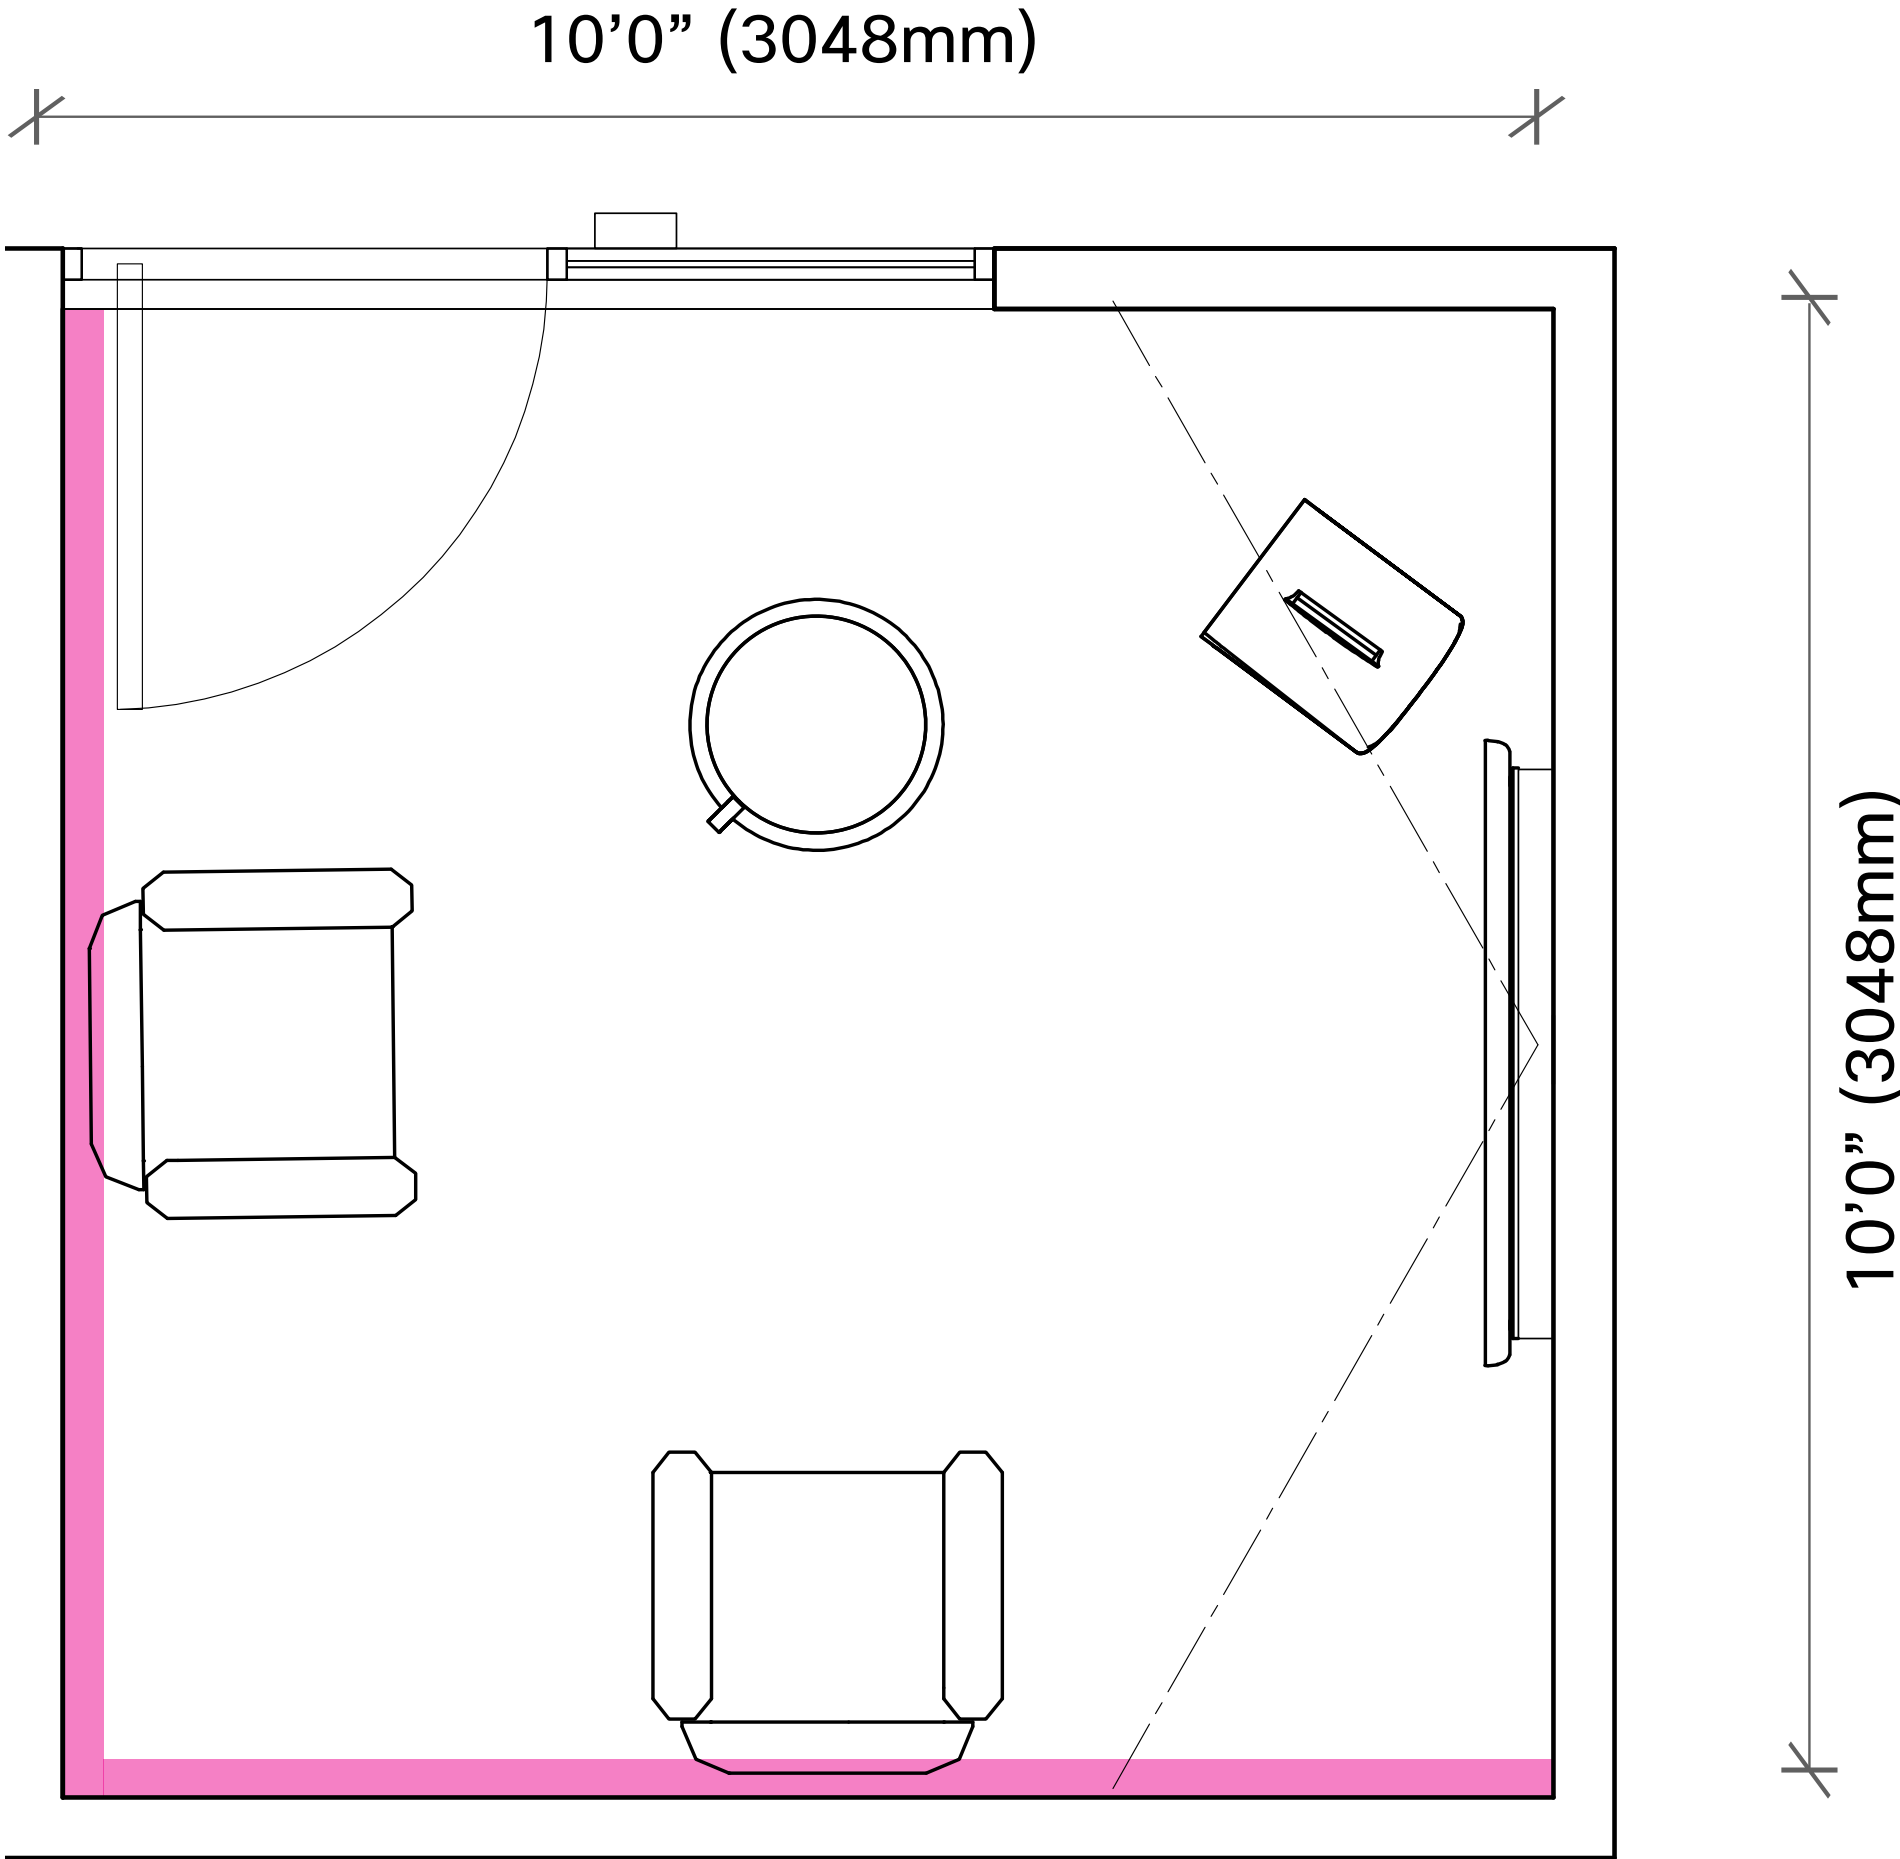

- Two walls of acoustical wall treatment is optimal, preferred location is wall opposite device and then adjoining, away from entry location.



Power & Data

General Specifications

Power and data requirements need to be verified for each project. Provide video device power and data even if the project plan does not include it on day one. Based on the design of this space, core drills, and floor boxes will not be required.

Power & Data

Provide one (1) duplex power outlet and one data receptacle with two (2) ethernet ports on the wall behind the video device. Refer to the elevations page for details. The specific location should be confirmed with the mount manufacturer. With the Cisco Room Bar option, an additional data receptacle should also be added to the space for Cisco Room Navigator for Table connectivity. Exact location to be determined based in consultation with the architect and design teams.

Exploded IT Diagram



Cisco Room Navigator for Wall


It is recommended to run the cable inside the wall or through the door frame directly back to a network switch.

Wall Blocking

Required when the device is wall-mounted. The size and composition of blocking materials should be determined based on the overall weight of the solution deployed.

Core Drilling

Not typically required.

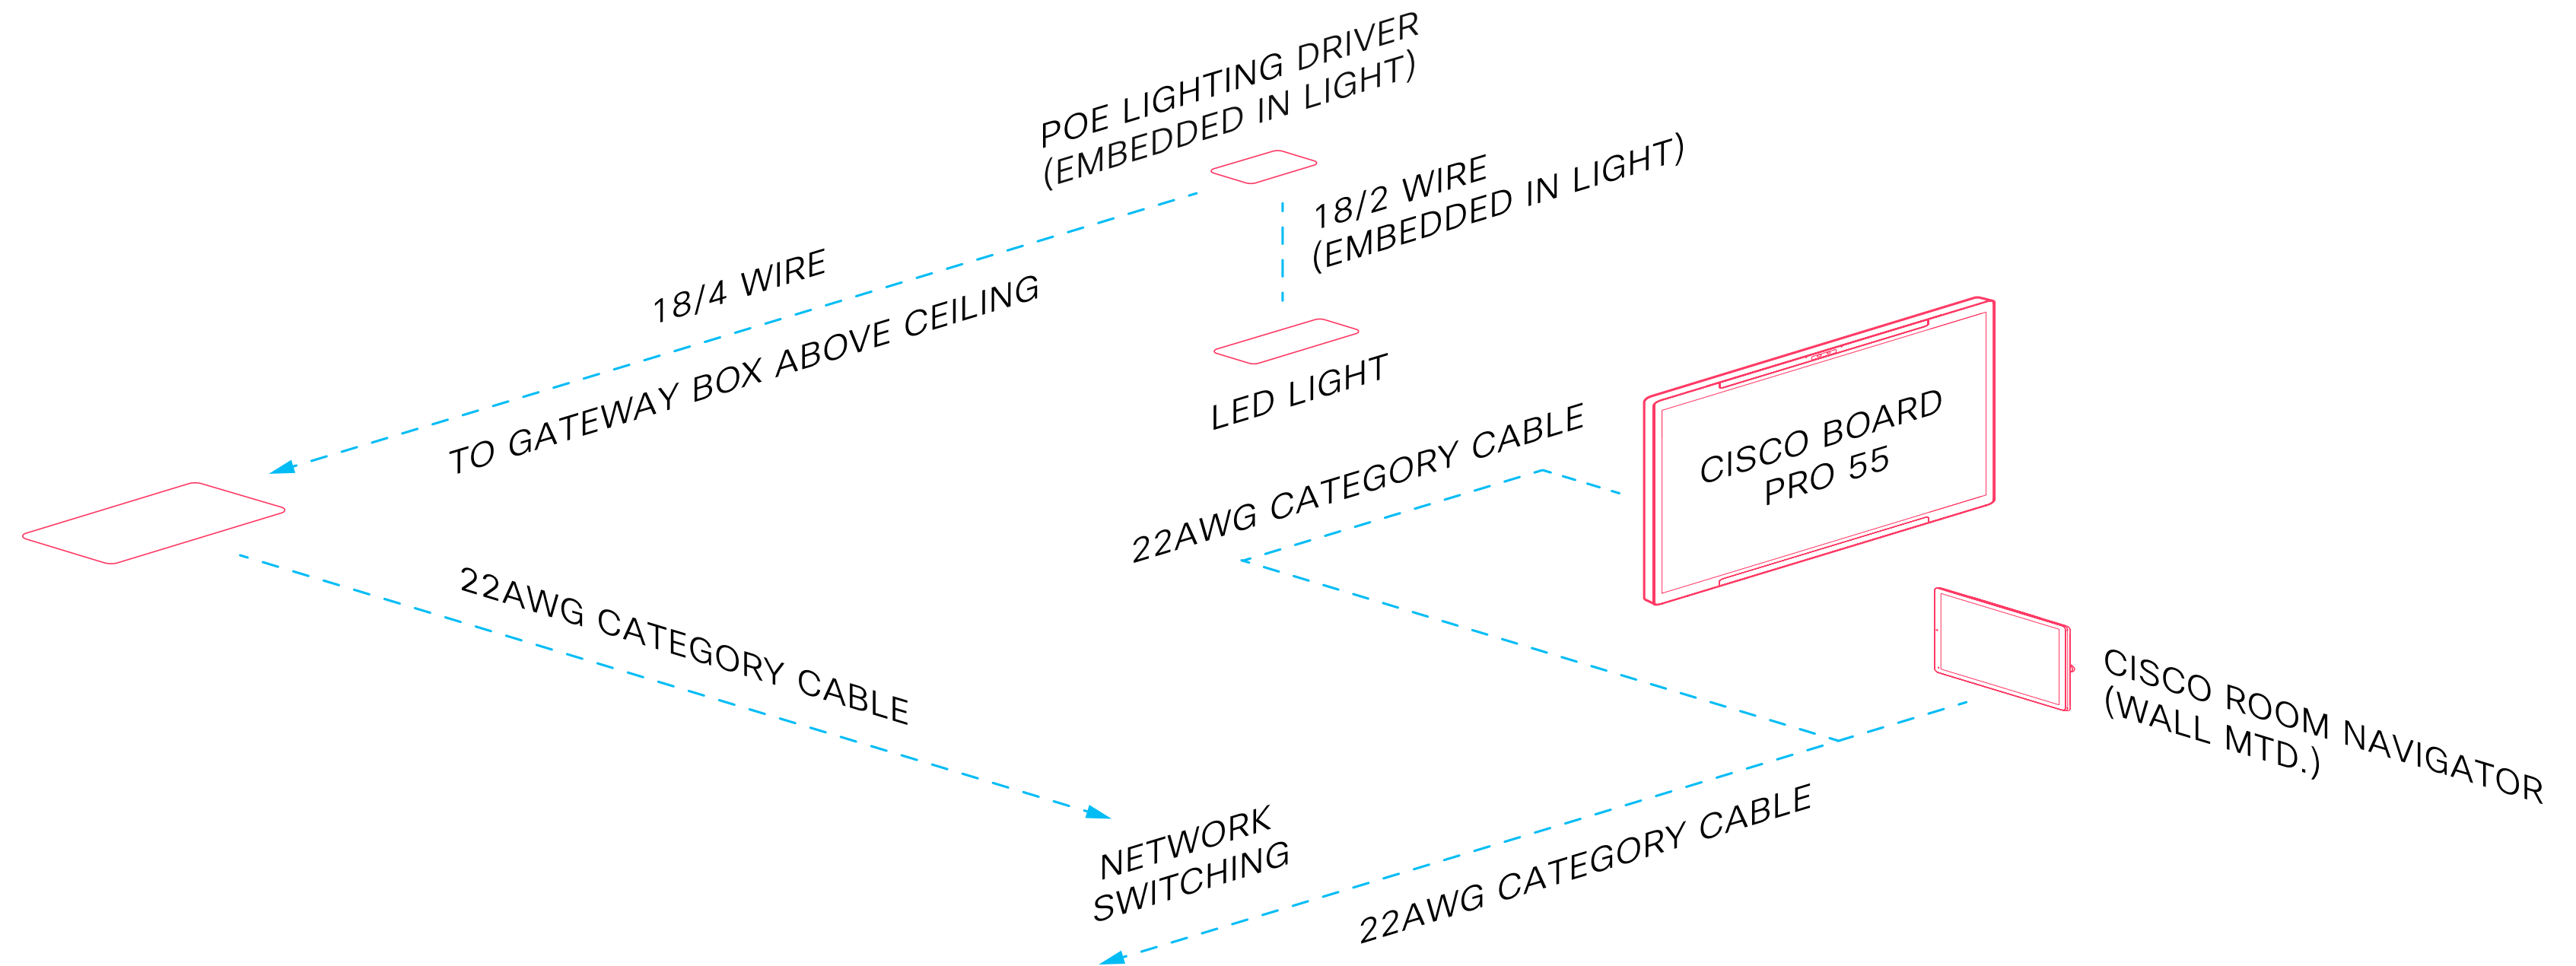

Exploded IT Diagram



Cisco Room Navigator for Table (required)

If possible, the Cisco Room Navigator for Table should be connected to the Cisco Room Bar over the IT network, via a separate ethernet jack within the space. The location of this jack should be made in conjunction with the architect and/or interior design team, based on the layout of the furniture (as to be convenient to users of the space).

Cisco Room Navigator for Wall


It is recommended to run the cable inside the wall or through the door frame directly back to a network switch.

Wall Blocking

Required when the device is wall-mounted. The size and composition of blocking materials should be determined based on the overall weight of the solution deployed.


Core Drilling

Not typically required.

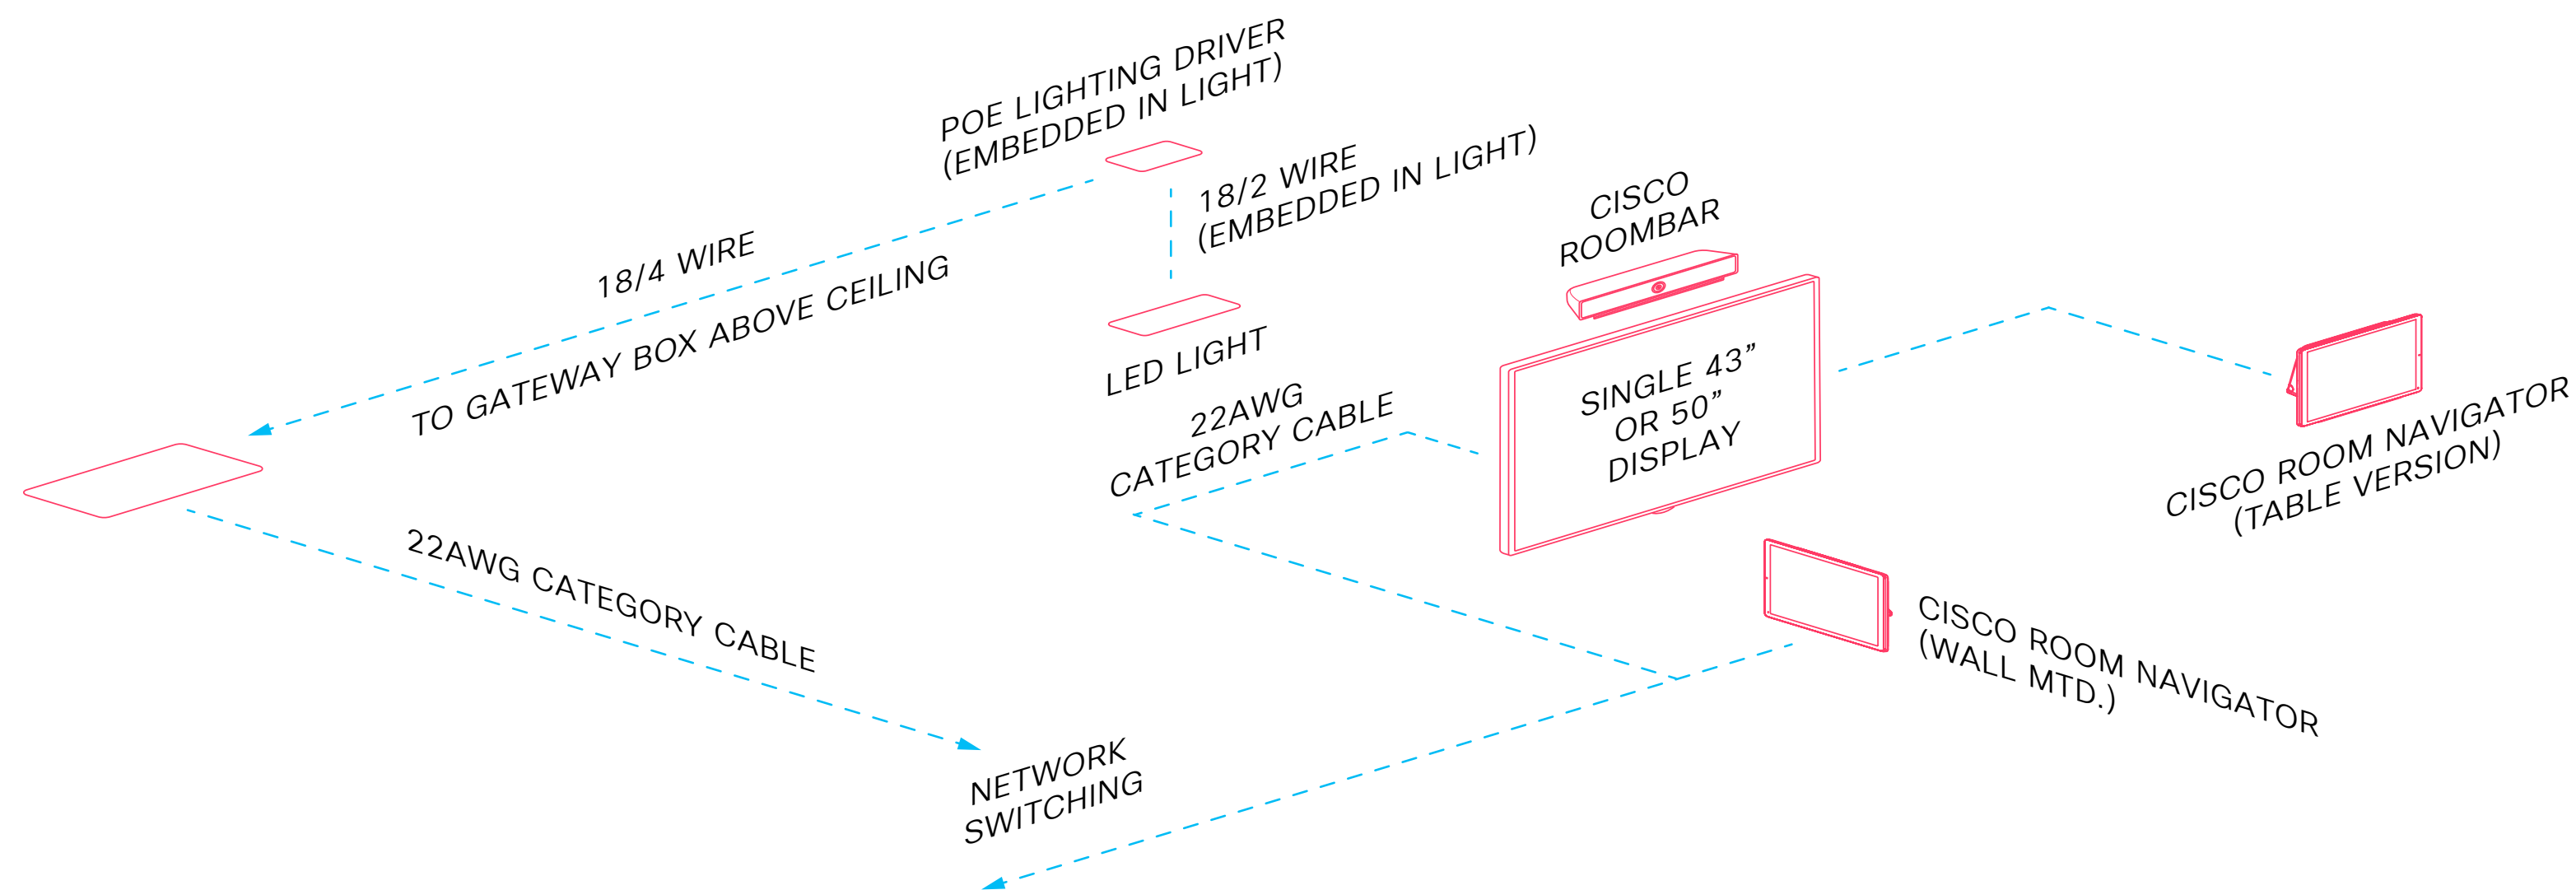


Connectivity View

Option 1: Cisco Board Pro 55

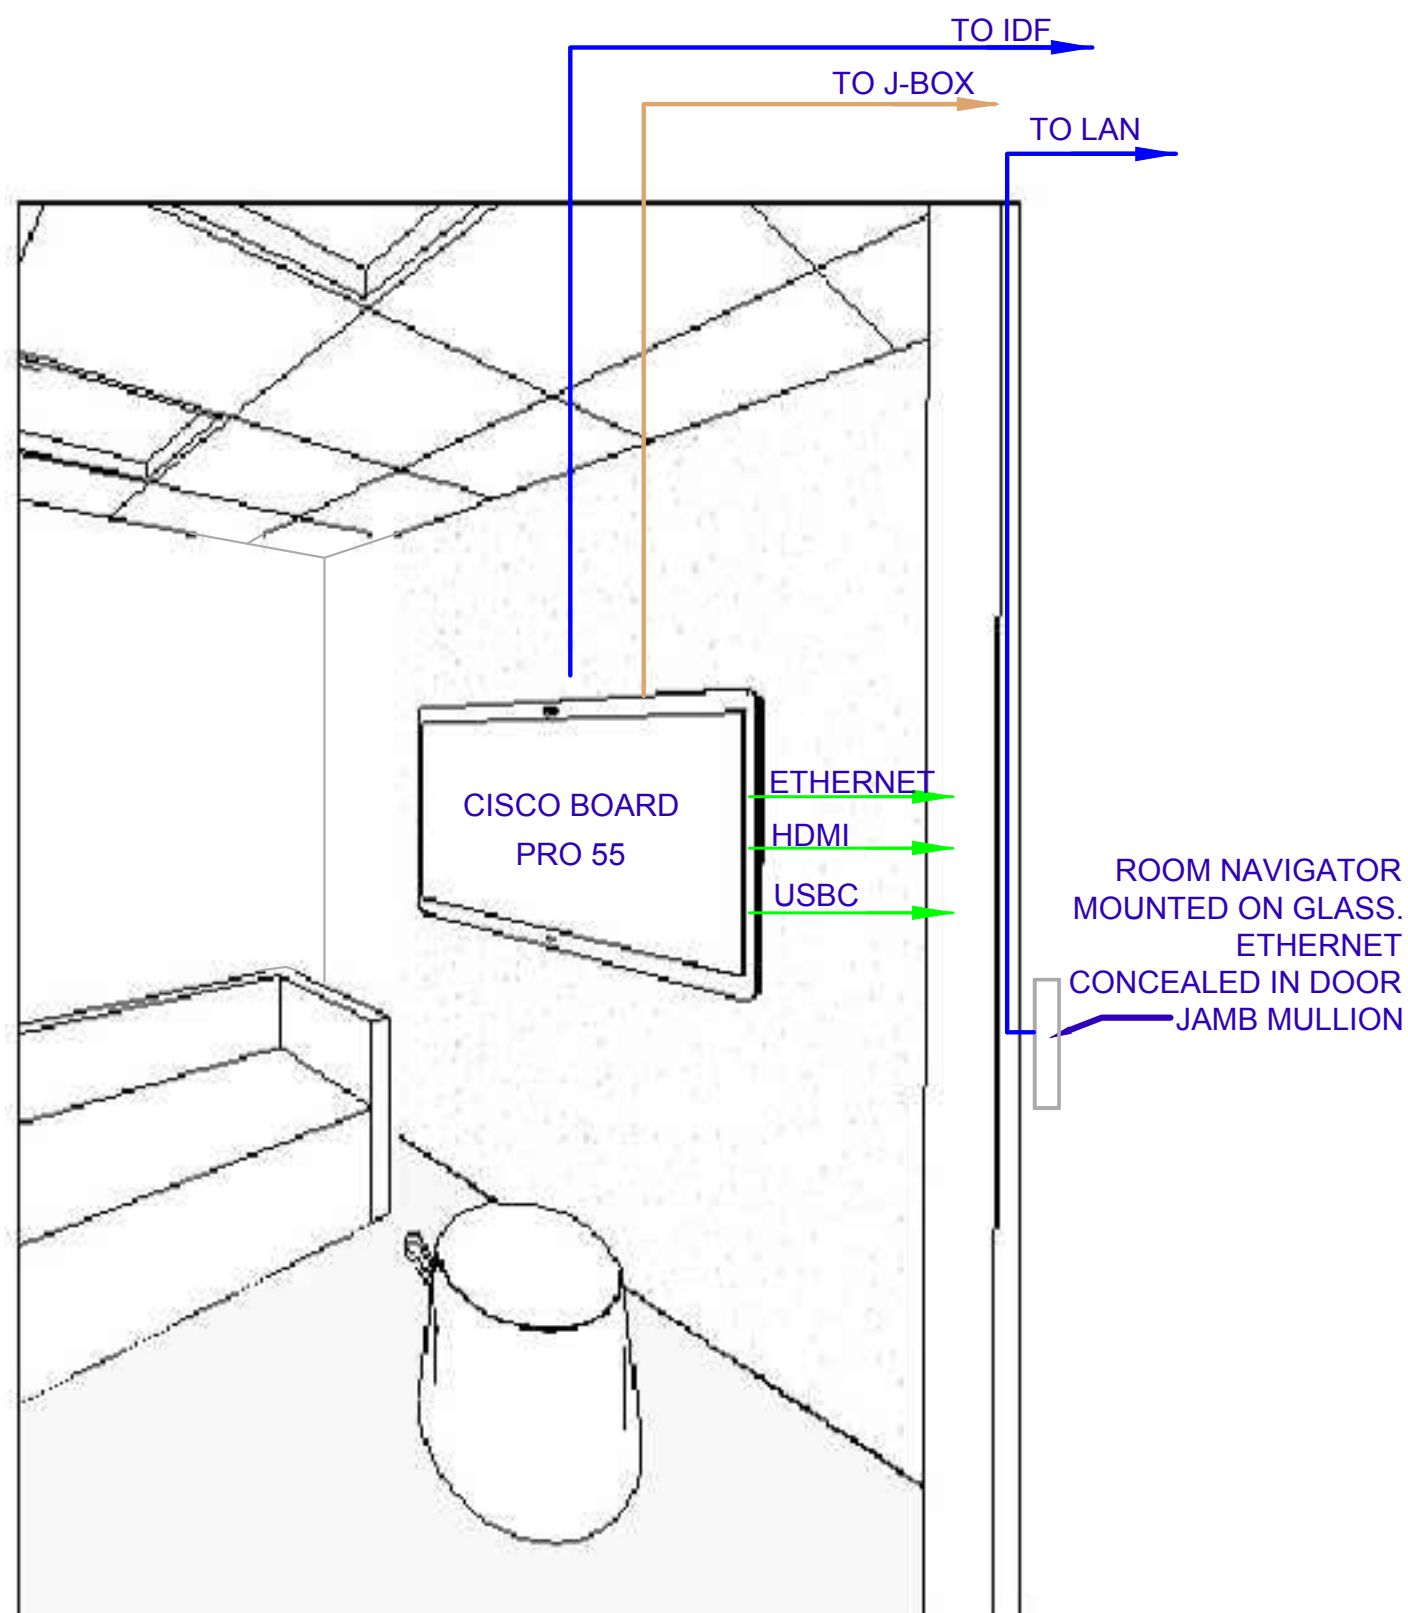


- ETHERNET
- POWER
- USB

Option 2: Cisco Room Bar

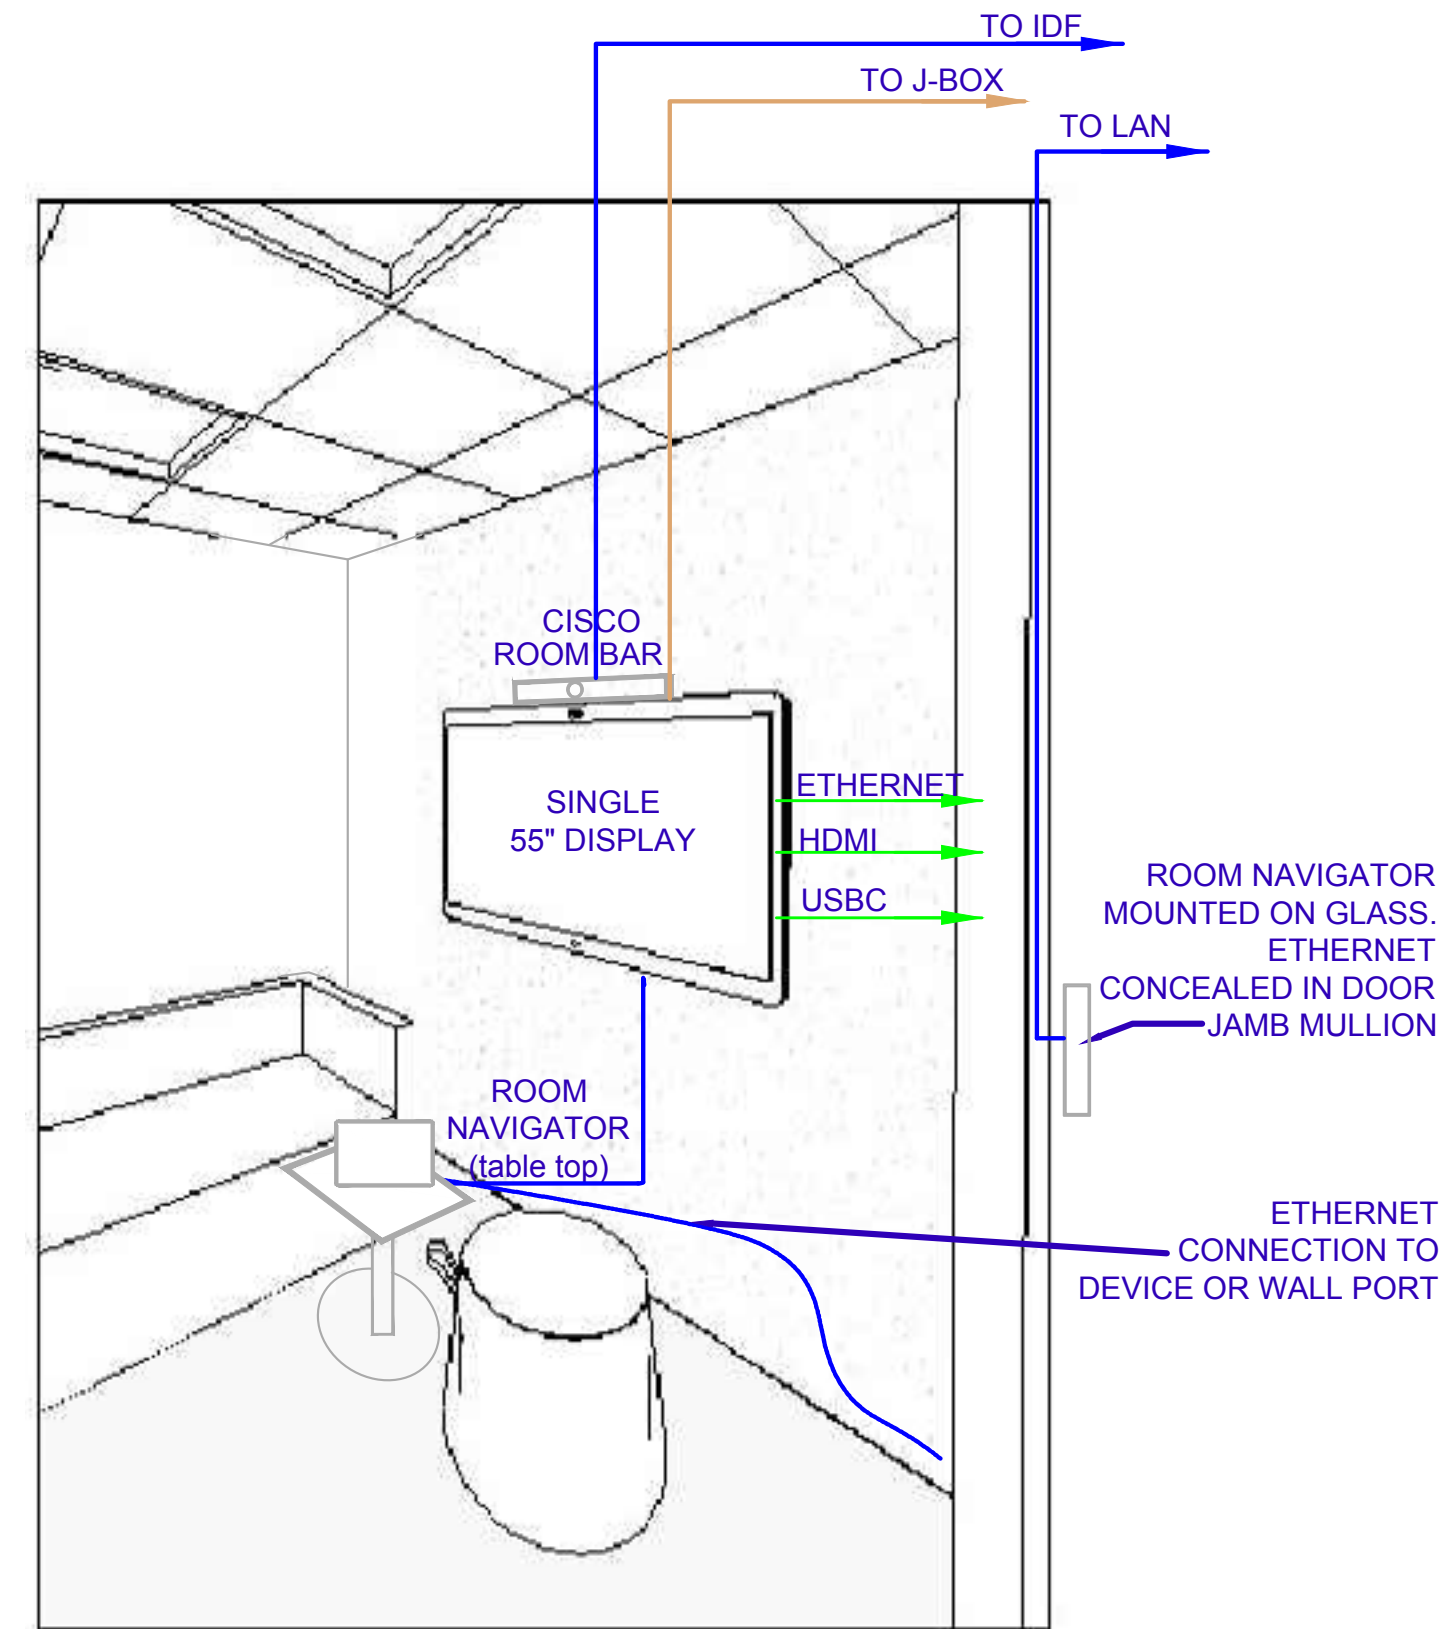

- ETHERNET
- POWER
- USB

IT/OT Reference Architectures

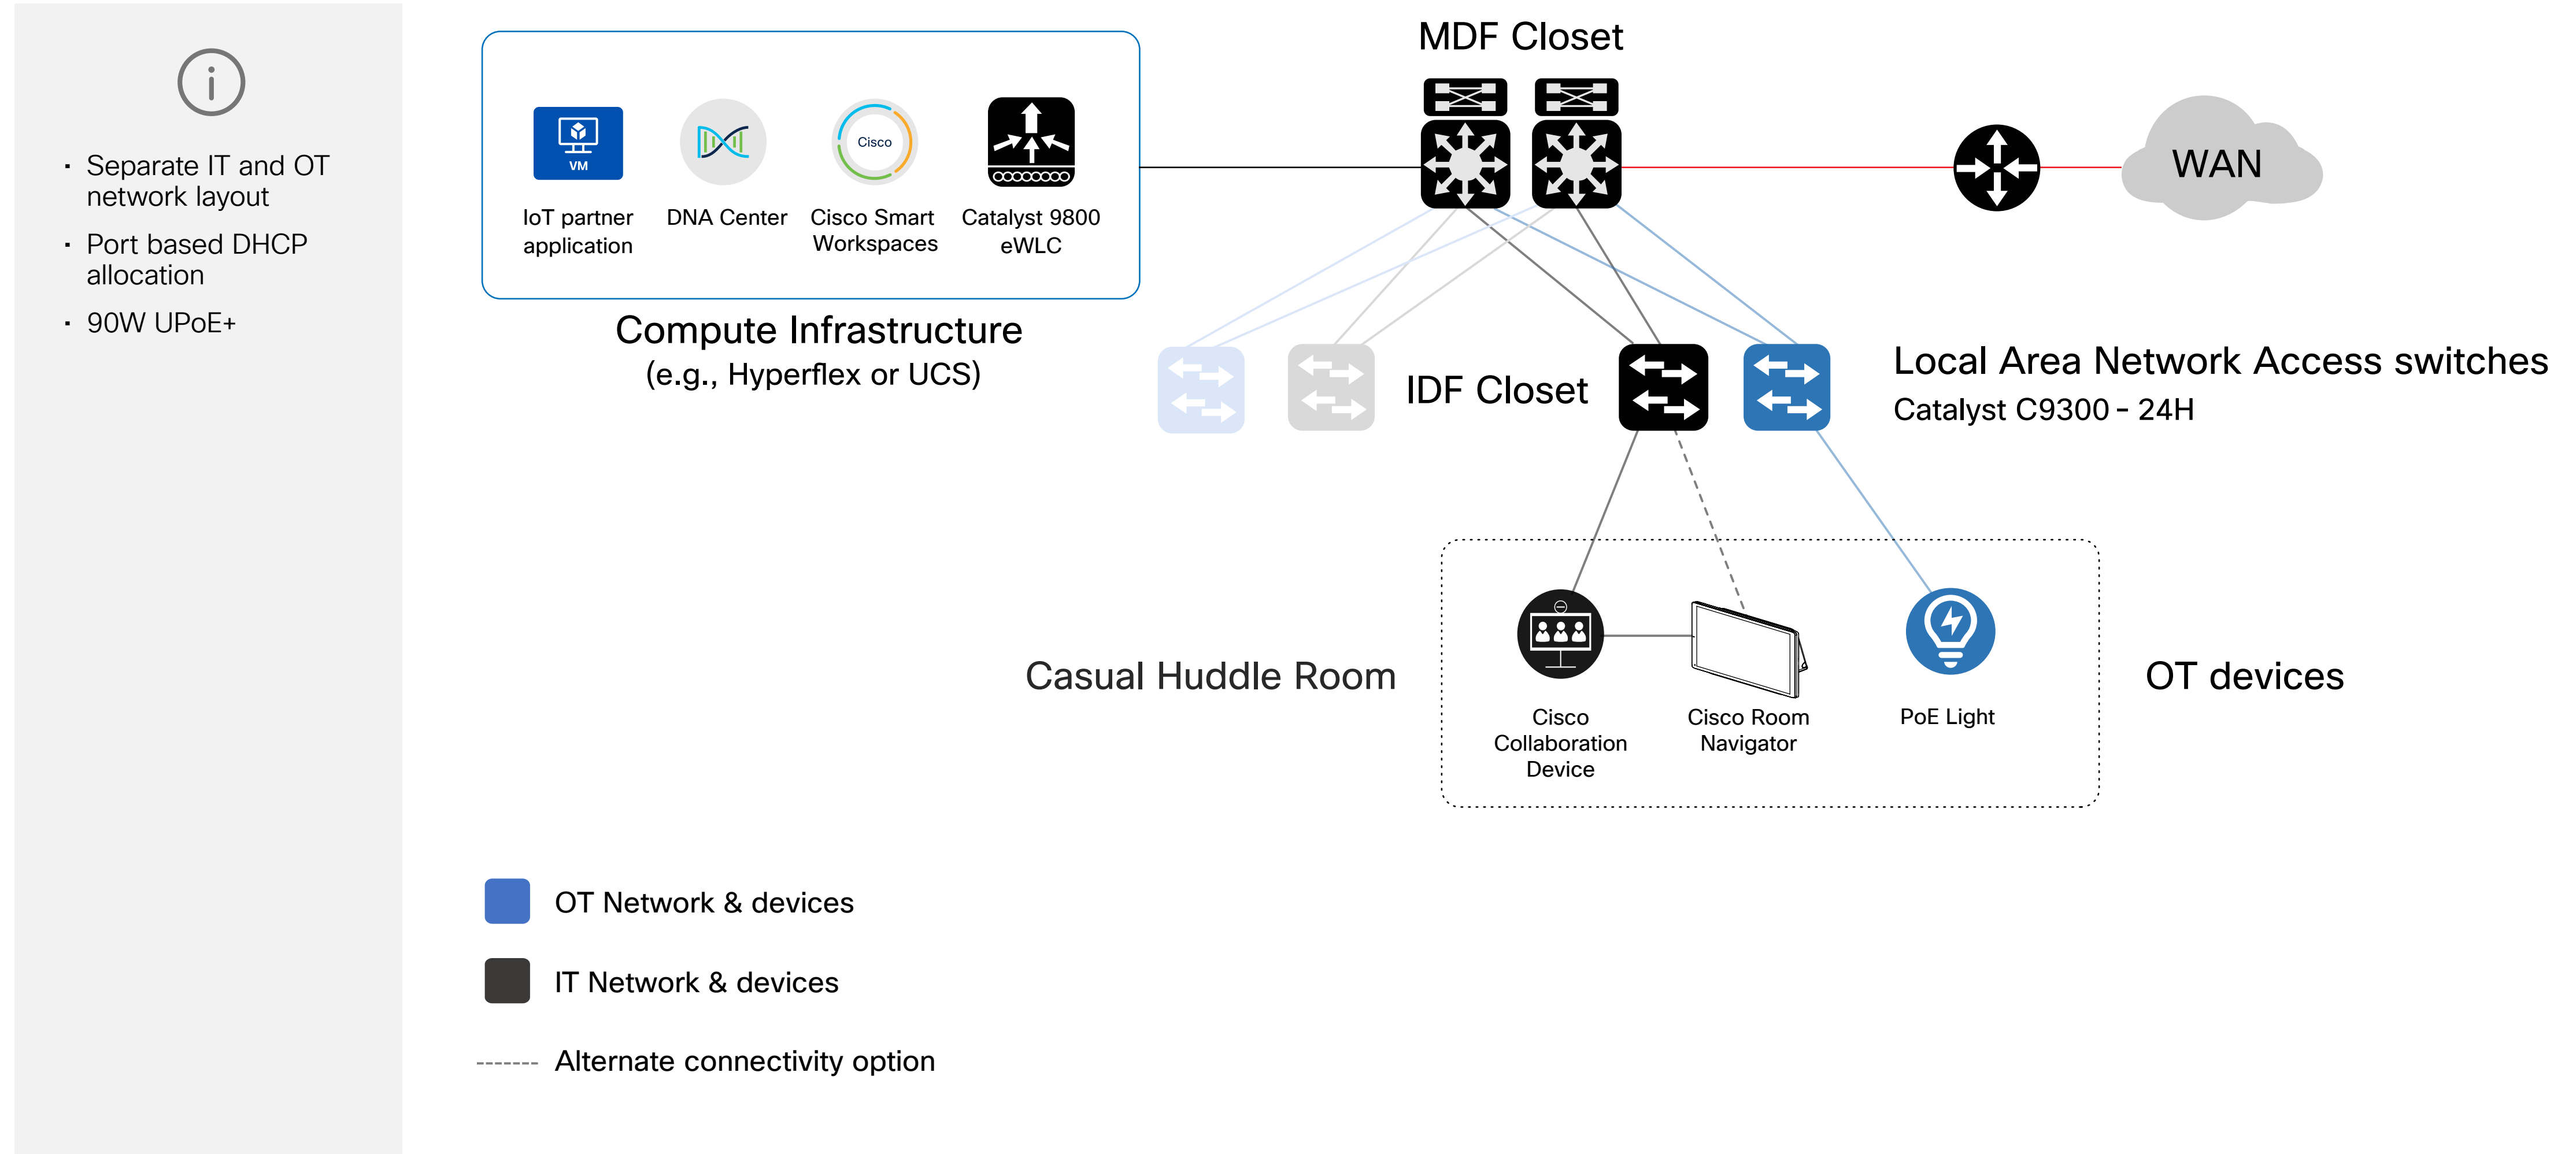

IT/OT Bill of Material

Cisco Products - Cisco Board Pro 55 Option

- **CS-BRD55P-K9** Cisco Board Pro 55
- **CS-T10-WM-K9=** Cisco Room Navigator for Wall

Cisco Products - Cisco Room Bar Option

- **CS-BAR-T-K9** Cisco Room Bar Bundle - Carbon
 - **CS-T10-TS-G-K9** Cisco Room Navigator for Table (included with Cisco Room Bar)
- **CS-T10-WM-K9=** Cisco Room Navigator for Wall

IOT Devices

- IAQ coming from the Cisco Room Navigator or the Cisco Board Pro 55
- Occupancy sensing is coming from the Cisco Endpoints
- Suggested lighting specifications: 220LPW raw, 140LPW delivered
- Each Huddle room PoE lights being power by a single port on the ceiling
- Traditional DC Wall Switch
- Ensure Collaboration device is not plugged into ASHRAE 90.1 outlet

External microphones and speakers

- Mic and speakers are embedded in the Cisco Endpoints. No additional mic or speakers required
-

Commissioning-User Acceptance Testing (UAT) Criteria (Sample)

OT/Space Testing

- Verify manual adjustment of lights, shades and environmental controls are operational from wall controls
- Confirm lighting occupancy sensor is functional
- Check any tabletop power and data functionality
- Verify any smart buildings integrations are working properly


IT Testing

- Internet connectivity of Cisco Collaboration device
- Initiate test calls on video endpoint (via Room Navigator or Board Pro, Webex app and voice controls)
- Validate environmental metrics are being displayed on collaboration device and Room Navigator
- Confirm help videos are loaded
- Confirm occupancy beacon function is correctly working on Cisco Room Navigator for Wall
- Verify the Cisco Smart Workspaces display is showing proper presence status



Design Files

Design files (Revit, AutoCAD, Sketch up, Rhino3D, etc.) for Cisco's collaboration devices, network switches, wireless access points and Meraki security cameras can be found at www.bimobjects.com, search "Cisco."

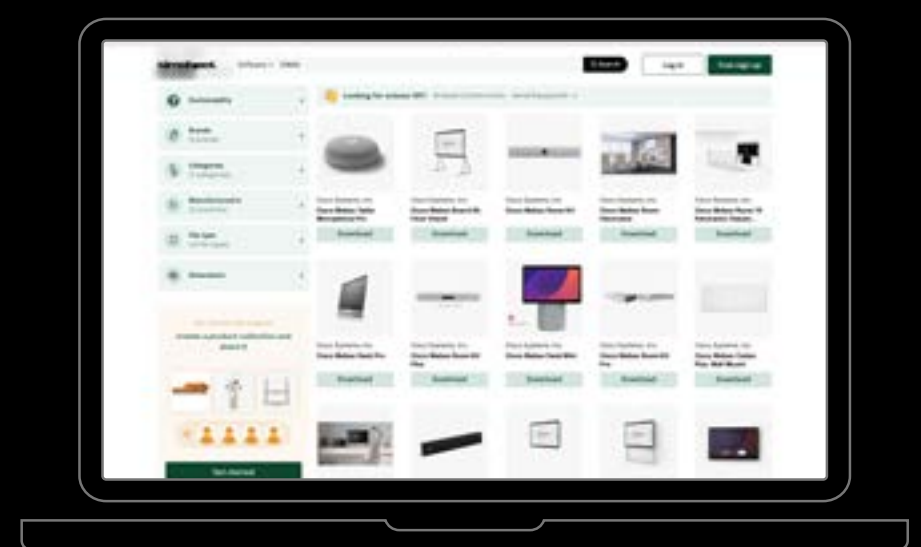

Resources

Guide: Best Practices for Creating Effective Video-enabled Rooms

Cisco Room Bar Data Sheet

© 2024 Cisco and/or its affiliates. All rights reserved. Cisco, the Cisco logo, Webex by Cisco, and Webex are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, see the Trademarks page on the Cisco website. Third-party trademarks mentioned are the property of their respective owners. The use of the word "partner" does not imply a partnership relationship between Cisco and any other company. (2106R)

The intent of this document is to highlight the details, components and partners used in the creation of a Large Collaboration Room. Any reference herein to any specific commercial products or service does not necessarily constitute or imply its endorsement or recommendation.

