REGENCY®
FIREPLACE PRODUCTS

WOOD INSERTS



regency-fire.com

WHY CHOOSE REGENCY?

For the past 45+ years Regency has been focused on creating innovative, high-quality and reliable products that reduce heating costs and add true value to the home. We design all our products to be durable and last a lifetime so that our customers can enjoy them for years to come.

HIGH-QUALITY

Producing a high-quality product has been at the very heart of what we do from when that very first stove rolled off the production line in 1979. We are ever-focused on producing quality products for our customers that will last for years to come.

BEST WARRANTY

A fireplace should be reliable and should work right the first time it is used, and the 1,000th. A core part of our business is making sure that we are building long-lasting, durable, high-quality products; we back-up that commitment with the industry's best warranty on all our products.

COST-EFFICIENT

Never before have home heating costs been higher. Turn your furnace way down and zone heat with our beautiful, reliable and convenient Regency products. Not only can you cut your fuel bills in half, but you'll be able to enjoy the timeless comfort of a Regency fire.

Why Regency? Because it's *more* than a fireplace!



TABLE OF CONTENTS

Hampton® **Hi1150**	**06**
Regency Alterra® **Ci1150**	**07**
Regency Classic™ **i1150**	**08**
Regency Cascades™ **i1500**	**09**
Regency Classic™ **i2450**	**10**
Regency Cascades™ **i2500**	**11**
Hampton® **Hi2450**	**12**
Hampton® **Hi500**	**13**
Regency Pro-Series™ **Ci2700**	**14**
Regency Alterra Pro™ **i3000**	**16**
Technology	**18**
Accessories	**20**
Specifications	**22**





renewable • affordable • beautiful







REGENCY WOOD PRODUCTS

ECO-FRIENDLY

Regency wood inserts are EPA Certified so you burn less wood, produce fewer emissions, and get longer burns while keeping your home warm all year long.

HIGHLY EFFICIENT

Using more of the wood's available energy means less loading, less chopping, less effort, and most importantly less money spent on wood! Save money with highly efficient Regency wood products.

INDUSTRY'S BEST WARRANTY

Every product is backed by our lifetime limited warranty, and our hybrid products offer a 10-year, 100% warranty on the original combustor. The best in the industry!

QUALITY, DURABLE PRODUCTS

Regency wood products are manufactured right here in North America using high-quality thick gauge steel. All Regency products are designed from the ground up to be durable and to last generations.

ECO BOOST - TRIPLE BURN TECHNOLOGY

Triple stage burn technology delivers a system of high-efficiency, clean combustion and maximum heat control, all with less wood, less loading and less effort.

HAMPTON® Hi1150

Small Non-Catalytic Wood Insert



Hi1150 shown in timberline brown, regular faceplate and 2-speed blower.

The Hampton Hi1150 small cast iron wood insert offers a traditional look and feel of cast iron with modern efficiency. This unit delivers up to 55,000 BTU of high-efficiency heat throughout your home providing comfort and warmth to the living areas you spend time in. Decrease your heating bills and increase the value of your home with this beautiful Hampton insert.

FEATURES

- Large fire viewing area, with heat radiating ceramic glass
- Decorative cast iron grille
- Cast iron exterior provides additional radiant heating
- Wood-finished handle
- Heavy-duty cast hinges that will never bend or break
- Solid forged steel adjustable cam lock ensures a tight door seal over time
- Side-mounted air adjustment
- High-performance brick-lined firebox reflects heat
- Non-obtrusive air wash curtain keeps glass clean
- Heavy gauge steel log retainers to stop logs from rolling

OPTIONS

- Metallic black or timberline brown enamel finish
- 2-speed blower
- Power outlet conversion
- Regency stainless steel flex liner kits (5.5" DIA) in 25 ft. and 35 ft. lengths
- Wrap insulation kits
- Flue connectors

SPECIFICATIONS	
Maximum BTU*	55,000
Typical sq. ft. heated**	600 - 1,200
EPA Efficiency	75% LHV / 71% HHV
Max log size	18"
Burn time	Up to 8 hours
Emissions	1.3 g/h
Firebox size	0.98 cu. ft.
Flue size	6"

MIN. FIREPLACE OPENING	
Width (front) x Height	25" x 19-5/8"
Depth (standard flue adapter)	15"
Depth (offset flue adapter)	18-1/16"

NOTE: The ember protection shown in these images may not accurately reflect the ember protection dimensions required for your area.
* Length of burn time and BTU range depend on type of wood, moisture content, climate conditions and installation.
** Varies depending on home floor plan, house layout, heat loss of the house and quality/moisture content of wood.

REGENCY ALTERRA® Ci1150

Small Non-Catalytic Wood Insert



Ci1150 Alterra wood insert with contemporary faceplate.

This Alterra small contemporary cast iron wood insert provides a flush and clean design for your existing fireplace. This compact wood heater delivers exceptional heating capacity and the two-speed blower helps distribute the heat to the far corners of your living space.

FEATURES

- Large fire viewing area, with heat radiating ceramic glass
- Cast iron faceplate provides additional radiant heating
- Heavy-duty cast hinges that will never bend or break
- Solid forged steel adjustable cam lock ensures a tight door seal over time
- Front-mounted air adjustment
- High-performance brick-lined firebox reflects heat
- Non-obtrusive air wash curtain keeps glass clean
- Heavy gauge steel log retainers to stop logs from rolling
- Flush mount 2-speed blower

OPTIONS

- Regular or custom made backing plates
- Standard or 4-1/2" offset flue adaptor
- Regency stainless steel flex liner kits (5.5" DIA) in 25 ft. and 35 ft. lengths
- Flue connectors
- Wrap insulation kits

SPECIFICATIONS	
Maximum BTU*	55,000
Typical sq. ft. heated**	600 - 1,200
EPA Efficiency	75% LHV / 71% HHV
Max log size	18"
Burn time	Up to 8 hours
Emissions	1.3 g/h
Firebox size	0.98 cu. ft.
Flue size	6"

MIN. FIREPLACE OPENING	
Width (front) x Height	25" x 23"
Depth (standard flue adapter)	15-1/8"
Depth (offset flue adapter)	18-1/8"

NOTE: The ember protection shown in these images may not accurately reflect the ember protection dimensions required for your area.
* Length of burn time and BTU range depend on type of wood, moisture content, climate conditions and installation.
** Varies depending on home floor plan, house layout, heat loss of the house and quality/moisture content of wood.

REGENCY CLASSIC™ i1150

Small Non-Catalytic Wood Insert



i1150 shown with nickel accent door, variable speed blower and oversize backing plate.

This Regency Classic i1150 small wood insert is perfect to seal off that drafty fireplace that isn't quite big enough for a full sized heater or for that area in your home that requires a smaller heater. It also adapts to fit most prefabricated fireplaces.

FEATURES

- Large fire viewing area, with heat radiating ceramic glass
- Wood-finished handle
- Heavy-duty cast hinges that will never bend or break
- Solid forged steel adjustable cam lock ensures a tight door seal over time
- Front-mounted air adjustment
- High-performance brick-lined firebox reflects heat
- Non-obtrusive air wash curtain to keeps glass clean
- Heavy-gauge steel log retainers to stop logs from rolling
- Welded ash lip will never bend or break

OPTIONS

- Cast iron door with heat radiating ceramic glass in black or nickel accent
- Contemporary door (black only)
- Regular or oversize backing plate (black trim included)
- Variable-speed blower
- Standard or 4-1/2" offset flue adaptor
- Regency stainless steel flex liner kits (5.5" DIA) in 25 ft. and 35 ft. lengths
- Wrap insulation kits
- Flue connectors

SPECIFICATIONS	
Maximum BTU*	55,000
Typical sq. ft. heated**	600 - 1,200
EPA Efficiency	77% LHV / 71% HHV
Max log size	18"
Burn time	Up to 8 hours
Emissions	1.3 g/h
Firebox size	0.98 cu. ft.
Flue size	6"

MIN. FIREPLACE OPENING	
Width (front) x Height	23" x 19"
Depth (standard flue adapter)	13-3/4"
Depth (offset flue adapter)	16-1/2"

NOTE: The ember protection shown in these images may not accurately reflect the ember protection dimensions required for your area.
* Length of burn time and BTU range depend on type of wood, moisture content, climate conditions and installation.
** Varies depending on home floor plan, house layout, heat loss of the house and quality/moisture content of wood.

REGENCY CASCADES™ i1500

Small Hybrid Wood Insert



i1500 shown with black door, variable speed blower and regular backing plate.

The Regency Cascades i1500 small hybrid wood insert features Regency's Eco-Boost triple burn technology to allow for longer burns, fewer emissions, and greater efficiency. Perfect for sealing a drafty fireplace or adding high-efficiency warmth to a smaller space.

FEATURES

- Large fire viewing area, with heat radiating ceramic glass
- Wood-finished handle
- Heavy-duty cast hinges that will never bend or break
- Solid forged steel adjustable cam lock ensures a tight door seal over time
- Front-mounted air adjustment & catalytic bypass
- Air & bypass safe operation tool
- Digital catalytic temperature monitor helps your stove reach maximum burn times & efficiency
- High-performance brick-lined firebox reflects heat
- Non-obtrusive air wash curtain keeps glass clean
- Heavy gauge steel log retainers to stop logs from rolling
- Welded ash lip will never bend or break
- 10-year 100% coverage on the original catalyst

OPTIONS

- Cast iron door with heat radiating ceramic glass in black or nickel accent
- Regular or oversize backing plate (black trim included)
- Variable-speed blower
- Standard or 4-1/2" offset flue adaptor
- Regency stainless steel flex liner kits (5.5" DIA) in 25 ft. and 35 ft. lengths
- Wrap insulation kits

SPECIFICATIONS	
Maximum BTU*	55,000
Typical sq. ft. heated**	600 - 1,200
EPA Efficiency	84% LHV / 78% HHV
Max log size	18"
Burn time	Up to 10 hours
Emissions	1.0 g/h
Firebox size	0.98 cu. ft.
Flue size	6"

MIN. FIREPLACE OPENING	
Width (front) x Height	23" x 19"
Depth (standard flue adapter)	13-3/4"
Depth (offset flue adapter)	16-1/2"

NOTE: The ember protection shown in these images may not accurately reflect the ember protection dimensions required for your area.
* Length of burn time and BTU range depend on type of wood, moisture content, climate conditions and installation.
** Varies depending on home floor plan, house layout, heat loss of the house and quality/moisture content of wood.

REGENCY CLASSIC™ i2450

Medium Non-Catalytic Wood Insert



i2450 shown with nickel accent door, 2-speed blower and regular backing plate.

The Regency Classic i2450 medium wood insert is ready to install and fits easily into your existing fireplace. Quickly and easily load wood front to back or side-to-side and experience long efficient burns. With the i2450 classic wood insert, style meets modern wood burning technology.

FEATURES

- Large fire viewing area, with heat radiating ceramic glass
- Wood-finished handle
- Heavy-duty cast hinges that will never bend or break
- Solid forged steel adjustable cam lock ensures a tight door seal over time
- Side-mounted air adjustment
- High-performance brick-lined firebox reflects heat
- Non-obtrusive air wash curtain keeps glass clean
- Black convection grilles
- Welded ash lip will never bend or break

OPTIONS

- Cast iron door with heat radiating ceramic glass in black or nickel accent
- Nickel convection grilles
- Regular or oversize backing plate (black trim included)
- 2-speed blower
- Regency stainless steel flex liner kits (5.5" DIA) in 25 ft. and 35 ft. lengths
- Wrap insulation kits
- Flue connectors

SPECIFICATIONS	
Maximum BTU*	75,000
Typical sq. ft. heated**	1,000 - 2,200
EPA Efficiency	72% LHV / 67% HHV
Max log size	18"
Burn time	Up to 10 hours
Emissions	1.4 g/h
Firebox size	2.3 cu. ft.
Flue size	6"

MIN. FIREPLACE OPENING	
Width (front) x Height	25" x 21-1/2"
Depth (standard flue adapter)	17"
Depth (offset flue adapter)	--

NOTE: The ember protection shown in these images may not accurately reflect the ember protection dimensions required for your area.
* Length of burn time and BTU range depend on type of wood, moisture content, climate conditions and installation.
** Varies depending on home floor plan, house layout, heat loss of the house and quality/moisture content of wood.

REGENCY CASCADES™ i2500

Medium Hybrid Wood Insert



i2500 shown with black door, 2-speed blower and regular backing plate.

The Regency Cascades i2500 medium hybrid wood insert features Regency's Eco-Boost triple burn technology designed to improve efficiency and burn times while reducing emissions. By using the latest in wood burning technology the Cascades i2500 provides long, clean burns so you burn less wood throughout the year.

FEATURES

- Wood-finished handle
- Heavy-duty cast hinges that will never bend or break
- Solid forged steel adjustable cam lock ensures a tight door seal over time
- Side-mounted air adjustment & front-mounted catalytic bypass
- Bypass safe operation tool
- Digital catalytic temperature monitor helps your stove reach maximum burn times & efficiency
- High-performance brick-lined firebox reflects heat
- Non-obtrusive air wash curtain keeps glass clean
- Black convection grilles
- Welded ash lip will never bend or break
- 10-year 100% coverage on the original catalyst

OPTIONS

- Cast iron door with heat radiating ceramic glass in black or nickel accent
- Nickel convection grilles
- Regular or oversize backing plate (black trim included)
- 2-speed blower
- Regency stainless steel flex liner kits (5.5" DIA) in 25 ft. and 35 ft. lengths
- Wrap insulation kits

SPECIFICATIONS	
Maximum BTU*	78,000
Typical sq. ft. heated**	1,000 - 2,200
EPA Efficiency	85% LHV / 78% HHV
Max log size	18"
Burn time	Up to 12 hours
Emissions	1.4 g/h
Firebox size	2.3 cu. ft.
Flue size	6"

MIN. FIREPLACE OPENING	
Width (front) x Height	25" x 21-1/2"
Depth (standard flue adapter)	17"
Depth (offset flue adapter)	--

NOTE: The ember protection shown in these images may not accurately reflect the ember protection dimensions required for your area.
* Length of burn time and BTU range depend on type of wood, moisture content, climate conditions and installation.
** Varies depending on home floor plan, house layout, heat loss of the house and quality/moisture content of wood.

HAMPTON® Hi2450

Medium Non-Catalytic Wood Insert



Hi2450 shown with regular faceplate in metallic black and 2-speed blower.

This Hampton medium cast iron wood insert adds the timeless beauty of cast iron while eliminating drafts from an open fireplace and adding a high-efficiency heater to your home. Choose from two colors, in different finishing to compliment your existing décor.

FEATURES

- Cast iron exterior provides additional radiant heating
- Wood-finished handle
- Heavy-duty cast hinges that will never bend or break
- Solid forged steel adjustable cam lock ensures a tight door seal over time
- Side-mounted air adjustment
- High-performance brick-lined firebox reflects heat
- Non-obtrusive air wash curtain keeps glass clean

OPTIONS

- Metallic black or timberline brown enamel finish
- 2-speed blower
- Regular or oversize faceplate
- Decorative cast iron grille
- Power outlet conversion
- Regency stainless steel flex liner kits (5.5" DIA) in 25 ft. and 35 ft. lengths
- Wrap insulation kits
- Flue connectors

SPECIFICATIONS	
Maximum BTU*	75,000
Typical sq. ft. heated**	1,000 - 2,200
EPA Efficiency	72% LHV / 67% HHV
Max log size	18"
Burn time	Up to 10 hours
Emissions	1.4 g/h
Firebox size	2.3 cu. ft.
Flue size	6"

MIN. FIREPLACE OPENING	
Width (front) x Height	25" x 21-1/2"
Depth (standard flue adapter)	17"
Depth (offset flue adapter)	--

NOTE: The ember protection shown in these images may not accurately reflect the ember protection dimensions required for your area.
* Length of burn time and BTU range depend on type of wood, moisture content, climate conditions and installation.
** Varies depending on home floor plan, house layout, heat loss of the house and quality/moisture content of wood.

HAMPTON® Hi500

Large Hybrid Wood Insert



Hi500 shown with regular faceplate in timberline brown.

The Hampton Hi500 is a large cast iron hybrid wood insert featuring Regency's Eco-Boost triple burn technology. Experience long term burns, fewer emissions, and greater efficiency. This unit combines modern technology and traditional design so you can enjoy the best of both worlds without sacrificing style or efficiency!

FEATURES

- Cast iron exterior provides additional radiant heating
- Heavy-duty cast hinges that will never bend or break
- Solid forged steel adjustable cam lock ensures a tight door seal over time
- Front-mounted air adjustment & catalytic bypass
- Digital catalytic temperature monitor helps your stove reach maximum burn times & efficiency
- High-performance brick-lined firebox reflects heat
- Non-obtrusive air wash curtain keeps glass clean
- Heavy gauge steel log retainers to stop logs from rolling
- 110° opening door for easy loading
- 10-year 100% coverage on the original catalyst

OPTIONS

- Metallic black or timberline brown enamel finish
- Flush mount 2-speed blower
- Regular or oversize faceplate
- Decorative cast iron grille
- Backing plates in two sizes, or custom made to order
- Offset flue adaptor for installation flexibility
- Regency stainless steel flex liner kits (5.5" DIA) in 25 ft. and 35 ft. lengths
- Wrap insulation kits

SPECIFICATIONS	
Maximum BTU*	78,000
Typical sq. ft. heated**	up to 2,600
EPA Efficiency	83% LHV / 77% HHV
Max log size	22"
Burn time	Up to 14 hours
Emissions	1.1 g/h
Firebox size	2.6 cu. ft.
Flue size	6"

MIN. FIREPLACE OPENING	
Width (front) x Height	29" x 21-3/4"
Depth (standard flue adapter)	19"
Depth (offset flue adapter)	--

NOTE: The ember protection shown in these images may not accurately reflect the ember protection dimensions required for your area.
* Length of burn time and BTU range depend on type of wood, moisture content, climate conditions and installation.
** Varies depending on home floor plan, house layout, heat loss of the house and quality/moisture content of wood.

REGENCY PRO-SERIES™ Ci2700

Large Hybrid Wood Insert



Ci2700 shown with low profile faceplate (digital catalytic monitor not shown).

The Regency Pro-Series Ci2700 contemporary cast iron hybrid wood insert features Regency's Eco-Boost triple burn technology to yield long burn times and minimal emissions. This insert's flush design takes the wood insert category to a whole new level. Clean lines surround an expansive linear firebox to provide you with a designer look around an impressive fire.

FEATURES

- Heavy-duty cast hinges that will never bend or break
- Solid forged steel adjustable cam lock ensures a tight door seal over time
- Front-mounted air adjustment & catalytic bypass
- Digital catalytic temperature monitor helps your stove reach maximum burn times & efficiency
- High-performance brick-lined firebox reflects heat
- Non-obtrusive air wash curtain keeps glass clean
- Heavy gauge steel log retainers to stop logs from rolling
- 110° opening door for easy loading
- 10-year 100% coverage on the original catalyst

OPTIONS

- Low profile or contemporary faceplate
- Concealed 2-speed blower
- Backing plate in 2 sizes, or custom made to order
- Offset flue adapter for installation flexibility
- Regency stainless steel flex liner kits (5.5" DIA) in 25 ft. and 35 ft. lengths
- Wrap insulation kits



Ci2700 shown with contemporary faceplate & oversized backing plate.

SPECIFICATIONS	
Maximum BTU*	78,000
Typical sq. ft. heated**	up to 2,600
EPA Efficiency	83% LHV / 77% HHV
Max log size	22"
Burn time	Up to 14 hours
Emissions	1.1 g/h
Firebox size	2.6 cu. ft.
Flue size	6"

MIN. FIREPLACE OPENING	
Width (front) x Height	29" x 21-3/4"
Depth (standard flue adapter)	19"
Depth (offset flue adapter)	--



Regular Backing Plate



Oversized Backing Plate



Custom Backing Plate

NOTE: The ember protection shown in these images may not accurately reflect the ember protection dimensions required for your area.
* Length of burn time and BTU range depend on type of wood, moisture content, climate conditions and installation.
** Varies depending on home floor plan, house layout, heat loss of the house and quality/moisture content of wood.

ALTERRA PRO i3000

Large Hybrid Wood Insert



i3000R shown with Oversize Contemporary Faceplate

Designed to transform your fireplace into a captivating focal point, the i3000 blends timeless beauty with modern functionality, offering the perfect balance of form and function. Unmatched Versatility: Whether you prefer a classic aesthetic or a sleek, contemporary look, our wood insert is designed to complement any style of décor. With a variety of finishes and designs to choose from, you can easily customize your insert to suit your personal taste.

FEATURES

- Removable flue collar, wheels and leveling bolts assist with quicker installation
- Adjustable door latch ensures a tight door seal over time
- Front mounted air adjustment & catalytic bypass
- Digital catalytic temperature monitor helps your stove reach maximum burn times & efficiency
- High performance brick-lined firebox reflects heat
- Non-obtrusive air wash curtain keeps glass clean
- Heavy gauge log retainer, which will develop a beautiful patina with use, keeps logs in their place
- Triple-burn technology creates longer and more complete burns
- Backed by the industry's most comprehensive Limited Lifetime Warranty
- 10-year, 100% coverage on original metal catalyst
- Qualifies for U.S. Biomass Tax Credit

OPTIONS

- Concealed temperature sensitive variable speed blower
- Regular, oversize or custom faceplate options
- Premium or Traditional surrounds
- Regency stainless steel flex liner kits (5.5" DIA) in 25 ft. and 35 ft. lengths
- Wrap insulation kits

GLASS VIEWING AREA	
Width	30"
Height	17"

SPECIFICATIONS

SPECIFICATIONS	
Maximum BTU*	85,000
Typical sq. ft. heated**	up to 2,600
EPA Efficiency	84% LHV / 78% HHV
Max Log Size	20”

MINIMUM FIREPLACE OPENING			
	With Faceplate	With Faceplate + Premium Surround	With Faceplate + Traditional Surround
Width (Front)	32”	32”	30.5”
Height	24”	24”	24”
Depth	21”	19.5”	19”

CHOOSE YOUR LOOK



SURROUND
(PREMIUM OR TRADITIONAL)
The surround slips over the faceplate

FACEPLATE
(CONTEMPORARY, CLASSIC OR ARCHED)

DOOR STYLE
(CONTEMPORARY OR CLASSIC)
i3000R or i3000A

PREMIUM FEATURES



Edge to Edge Frameless Glass Door



Smooth Contemporary Refractory Panels *(included)*



Door is Flush With Faceplate

FRONT OPTIONS



Contemporary Faceplate



Oversize Contemporary Faceplate



Classic Faceplate



Oversize Classic Faceplate



Arched Faceplate



Contemporary Faceplate and Brushed Nickel Premium Surround



Cast Faceplate


PREMIUM SURROUNDS*



Black



White



Sunset Bronze



Grey



Brushed Nickel

TRADITIONAL SURROUNDS*



Black



Brushed Antique Copper

CUSTOM FACEPLATE



Custom 3-sided Faceplate

*NOTE: Surrounds will reduce your minimum fireplace opening size. Refer to manual for more information.
Premium or Traditional Surrounds can only be used with Contemporary or Classic Faceplates.


WOOD TECHNOLOGY

CASCADES SERIES COMBUSTOR

Triple stage burn technology delivers a system of high-efficiency, clean combustion & maximum heat control, all with less wood, less loading & less effort.

HEAVY-DUTY STAINLESS STEEL FLAME SHIELD
Provides better distribution of the flame over the catalyst and extends the life of the catalyst.

SECONDARY AIR TUBES
The secondary air tubes, working with the catalyst, ensure the fuel is burned to its full potential; resulting in low emissions and high heat output.

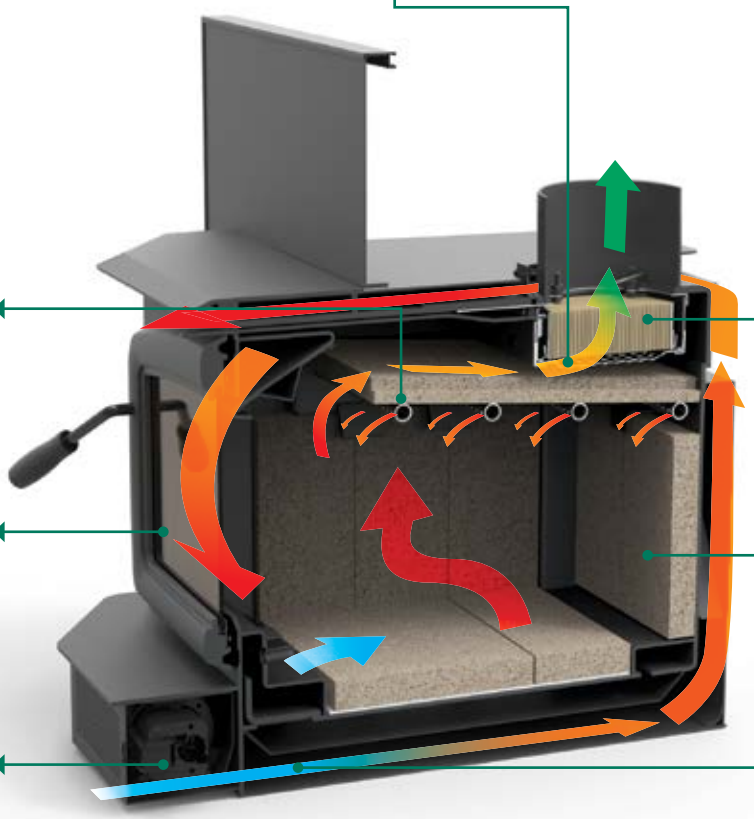

CASCADES SERIES COMBUSTOR
Create consistent heat by re-burning wood smoke particles that would normally go up the chimney.

AIRWASH SYSTEM
Keeps the glass clean and provides an excellent view of the fire.

HIGH PERFORMANCE BRICKS
Provides superior insulation and heat reflection.

OPTIONAL BLOWER
The blower distributes heat throughout the room. Blower cassette can be removed for cleaning.

COMBUSTION AIR
Air from the room is drawn in for primary & secondary combustion.

LEARN MORE ABOUT OUR WOOD TECHNOLOGIES AT
regency-fire.com/videos

WATCH OUR VIDEOS

NOT SHOWN IN THE DIAGRAM

HEAVY-DUTY CAM LATCH
Ensures airtight seal for controlled airflow.


WOOD TECHNOLOGY

PRO SERIES COMBUSTOR

With Eco-Boost technology you get more out of your wood. Offering some of the highest efficiencies available anywhere, the Eco-Boost system uses more of the available energy in the wood, resulting in less loading, less chopping, and less hauling. The triple-stage burn significantly reduces emissions below EPA 2020 standards.

SECONDARY AIR TUBES
The secondary air tubes, working with the catalyst, ensure the fuel is burned to its full potential; resulting in low emissions and high heat output.

HEAVY-DUTY STAINLESS STEEL FLAME SHIELD
Provides better distribution of the flame over the catalyst and extends the life of the catalyst.

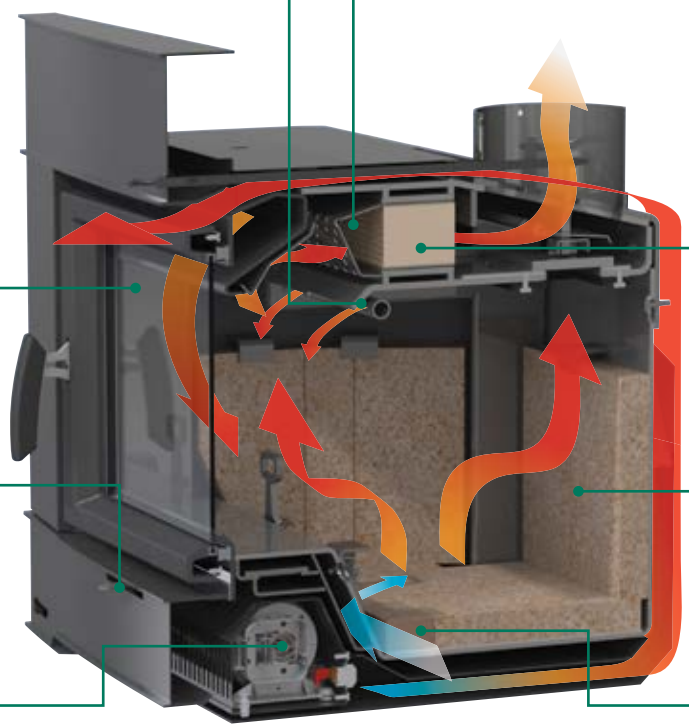

AIRWASH SYSTEM
Keeps the glass clean and provides an excellent view of the fire.

PRO SERIES COMBUSTOR
Create consistent heat by re-burning wood smoke particles that would normally go up the chimney.

SINGLE LEVER AIR CONTROL
Easily controls the heat output and intensity of the fire by adjusting the amount of air intake.

HIGH PERFORMANCE BRICKS
Provides superior insulation and heat reflection.

OPTIONAL BLOWER
The blower distributes heat throughout the room. Blower cassette can be removed for cleaning.

COMBUSTION AIR
Air from the room is drawn in for primary & secondary combustion.

LEARN MORE ABOUT OUR WOOD TECHNOLOGIES AT
regency-fire.com/videos

WATCH OUR VIDEOS

NOT SHOWN IN THE DIAGRAM

HEAVY-DUTY CAM LATCH
Ensures airtight seal for controlled airflow.

ACCESSORIES

CAST IRON DOORS (Classic & Cascade Series only)



Black cast iron door
(includes black hinge caps)



Nickel accent cast iron door
(includes nickel hinge caps)



Contemporary door
(only available on select models)

POWERFUL BLOWER



This powerful blower can dramatically increase the circulation of heat in your home. It includes an automatic heat sensor which turns the blower on & off at predetermined temperatures.



SPECIFICATION RECAP

SPECIFICATIONS	Hi1150 / Ci1150 / i1150	i1500	i2450	i2500
Maximum BTU*	55,000	55,000	75,000	83,000
Typical sq. ft. heated**	600 - 1,200	600 - 1,200	1,000 - 2,200	1,000 - 2,200
EPA Efficiency	77% LHV 71% HHV	84% LHV 78% HHV	72% LHV 67% HHV	85% LHV 78% HHV
Max log size	18"	18”	18"	18"
Burn time*	Up to 8 hours	Up to 10 hours	Up to 10 hours	Up to 12 hours
Emissions	1.3 g/h	1.0 g/h	1.4 g/h	1.4 g/h
Firebox size	0.98 cu. ft.	0.98 cu. ft.	2.3 cu. ft.	2.3 cu. ft.
Flue size	6"	6"	6"	6"
Biomass Tax Credit Eligible	-	✓	-	✓


SPECIFICATIONS	Hi2450	Hi500 / Ci2700	i3000
Maximum BTU*	75,000	78,000	85,000
Typical sq. ft. heated**	1,000 - 2,200	up to 2,600	up to 2,600
EPA Efficiency	72% LHV 67% HHV	83% LHV 77% HHV	84% LHV 78% HHV
Max log size	18"	22"	20”
Burn time*	Up to 10 hours	Up to 14 hours	Up to 14 hours
Emissions	1.4 g/h	1.1 g/h	.95 g/h
Firebox size	2.3 cu. ft.	2.6 cu. ft.	3.0 cu. ft.
Flue size	6"	6"	6”
Biomass Tax Credit Eligible	-	✓	✓

* Length of burn time and BTU range depend on type of wood, moisture content, climate conditions and installation.
** Varies depending on home floor plan, house layout, heat loss of the house and quality/moisture content of wood.


BTU CALCULATION METHOD: Max BTUs are calculated by taking an average fillable volume of 95% of the stove’s capacity, multiplied by 19.5 pounds per square foot and an average of 9100 BTUs per pound of wood. Factoring in the listed efficiency, 15% moisture content and dividing by the proven burn time at the high heat setting.

SPECIFICATIONS


TOP VIEW

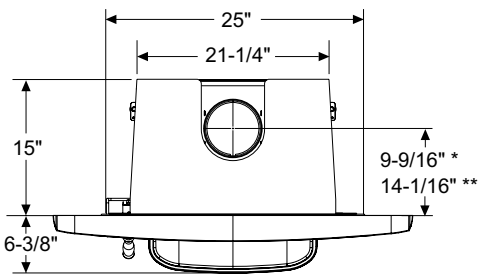

Hi1150

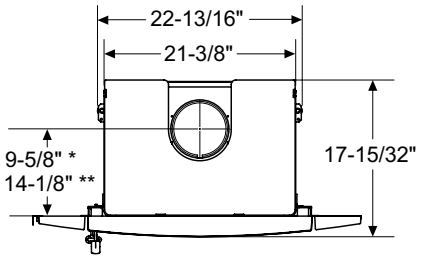


Ci1150

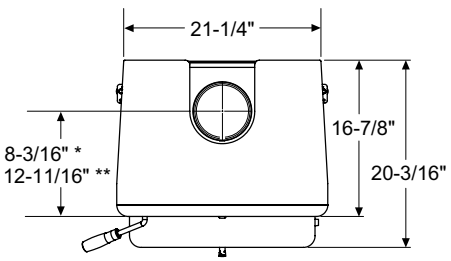


i1150 / i1500


* with standard flue adapter ** with offset flue adapter

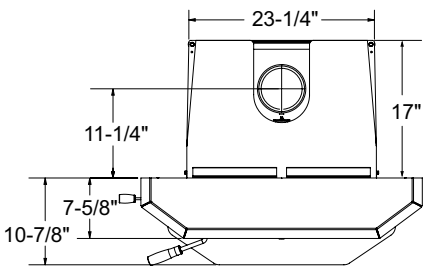


i2450 / i2500

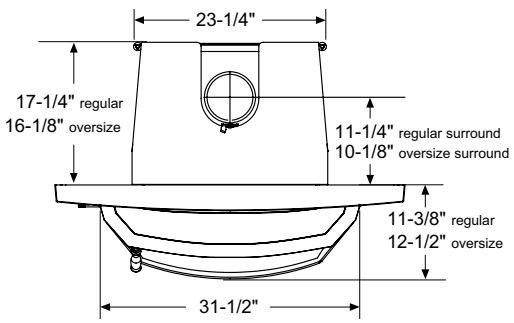

Hi2450

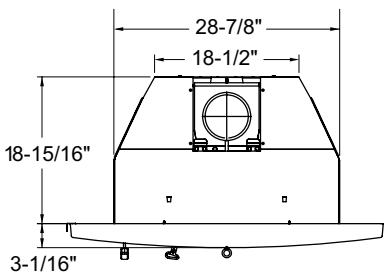

Ci2700* / Hi500

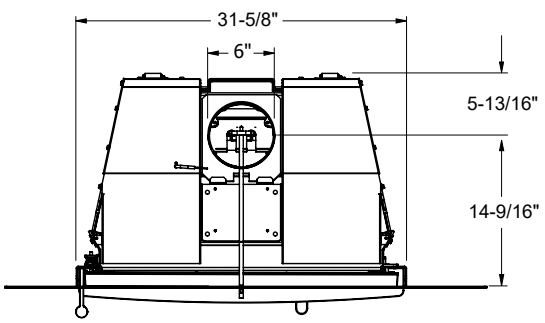

i3000

DIMENSIONS	Hi1150	Ci1150	i1150 / i1500	i2450 / i2500 / Hi2450	Ci2700* / Hi500	i3000
Firebox Height	18-13/16"	22-1/8"	18-3/4"	20-3/4"	21-1/2"	24"
Height to Top of Flue Collar	19-1/2"	22-13/16"	19-1/2"	21-3/8"	23-1/2"	23-1/2"
Faceplate (W x H)	39-13/16" x 27-1/4"	35-15/16" x 25-3/4"	38" x 26-3/8"	40" x 30"	40" x 26"	40" x 26"
Oversize Faceplate (W x H)	--	--	44" x 30-3/8"	48" x 33"	--	--
Backing Plate (W x H)	--	40" x 29-1/2"	--	--	44" x 29-7/8"	44" x 29-7/8"
Oversize Backing Plate (W x H)	--	--	--	--	48" x 33-7/8"	48" x 33-7/8"


*These dimensions only apply to Low Profile & Contemporary Faceplate.

DISCLAIMER: Please always refer to the manual for the latest up to date installation details.

SPECIFICATIONS

MIN. FIREPLACE OPENING	Hi1150	Ci1150	i1150 / i1500	i2450 / i2500 / Hi2450	Ci2700 / Hi500	i3000
Height	19-5/8"	23"	19"	21-1/2"	21-3/4"	24"
Width (front)	25"	25"	23"	25"	29"	32"
Depth (with standard flue adapter)	15"	15-1/8"	13-3/4"	17"	19"	21"
Depth (with offset flue adapter)	18-1/16"	18-1/8"	16-1/2"	--	--	--

NOTE: Surrounds will reduce your minimum fireplace opening size. Refer to manual for more information

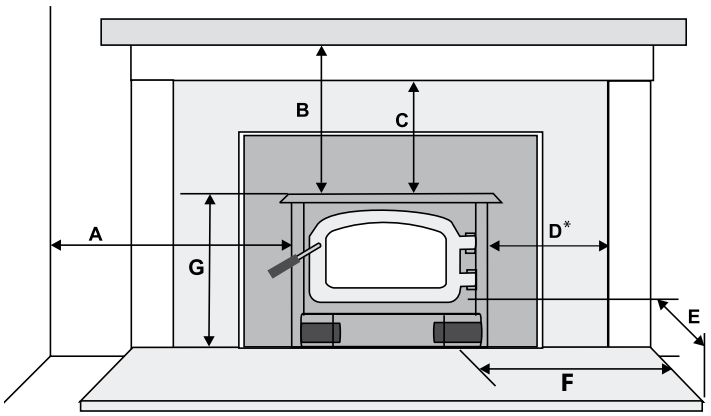

MASONRY FIREPLACE CLEARANCES

The minimum required clearances to combustible materials when installed into a masonry fireplace are listed below for 3.5"** mantle:

UNITS	ADJACENT SIDE WALL (TO SIDE)*	MANTLE*	TOP FACING*	SIDE FACING*	MIN. HEARTH EXTENSION		MINIMUM HEARTH SIDE EXTENSION	TO TOP OF UNIT
	A	B	C	D	E (USA)	E (CAN)	F	G
Hi1150	15"	20"	14"	7-7/8"	16	18"	8"	19"
Ci1150	15"	20"	14"	7-3/8"	16"	18"	8"	20-1/2"
i1150 / i1500	15"	15"	14"	1/2"	16"	18"	8"	18-3/4"
i2450	12"	17"	14"	1/2"	16"	18"	8"	20"
i2500	12"	17-1/4"	16"	1/2"	16"	18"	8"	20-3/4"
Hi2450	12"	17"	14"	1/2"	16"	18"	8"	21-5/8"
Ci2700 / Hi500	12-3/16"	21-5/8"	14"	7-3/8"	16"	18"	8"	19-1/4"
i3000	15-1/2"	15"	13-3/4"	11-3/4"	16"	18"	8"	23-1/2"

* Measured from side/top of appliance/door/surround depending on model.

** NOTE: Refer to manual for any mantle greater than 3.5" up to a maximum of 12"

DISCLAIMER: Please always refer to the manual for the latest up to date installation details.

SPECIFICATIONS

EPA 2020 CERTIFIED

Regency wood inserts are tested and certified to the strictest clean air standards as set by the United States Environmental Protection Agency (EPA). Regency's wood inserts are fully EPA 2020 certified, meaning they release very little particulate matter into the atmosphere, less than 2.5 grams per hour, compared to the 50–60 grams per hour produced by traditional open hearth fireplaces.

Regency engineers have meticulously designed the firebox to generate efficient airflow around the wood, allowing it to burn more completely, resulting in minimal and very fine ash. When comparing models, check the white EPA labels – a lower g/h rating means a cleaner, more efficient wood stove.

As trees grow, they absorb carbon dioxide from the atmosphere. When trees die and are left to decompose or burn in forest fires, the carbon stored within the trees is released back into the atmosphere, once again as carbon dioxide. Burning firewood produces the same amount of carbon dioxide as it has absorbed – this makes it carbon neutral. Wood is also a renewable, natural energy source.

Well-managed forests are a renewable and sustainable energy source that also helps reduce our reliance on oil and gas greenhouse gas emissions.



SPECIFICATIONS

FIREPLACE SELECTION WORKSHEET

We want you to enjoy your beautiful Regency fireplace for years to come. To help you figure out which product is just right for your home, fill in the following worksheet. Once complete, visit your nearest Regency dealer. Your professional Regency dealer will assess your needs - including local building codes - and install your Regency!

1. BASIC PRODUCT FUNCTION QUESTIONS

a. I would like my unit to provide me with: ☐ Supplemental heating ☐ Priority heating

b. The room/rooms I would like to heat are: _____ sq. ft.


2. FIREPLACE PRODUCT TYPE AND MEASUREMENTS


a. I am:
- ☐ Installing a new fireplace
- ☐ Installing into an existing fireplace

b. Fill in the following measurements:
- Ceiling Height: _____
- Location in the room: _____

c. What is the:
- Flooring material: _____
- Wall material: _____
- Ceiling material: _____

d. Fireplace opening dimensions:
- Width (front): _____
- Width (back): _____
- Height: _____
- Depth: _____

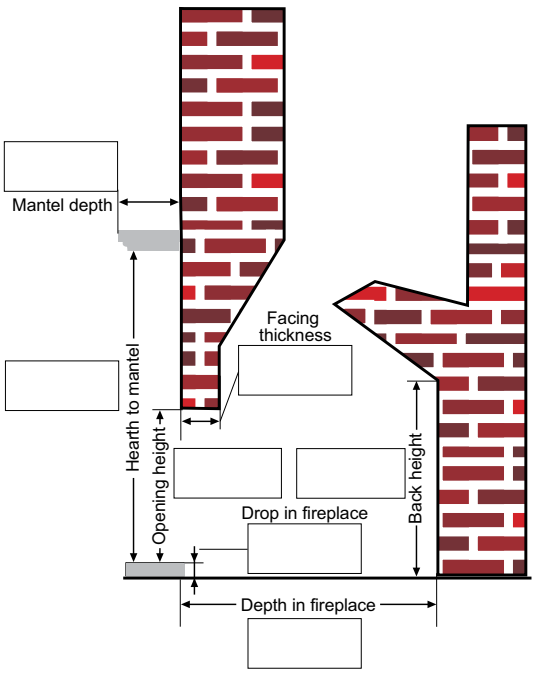

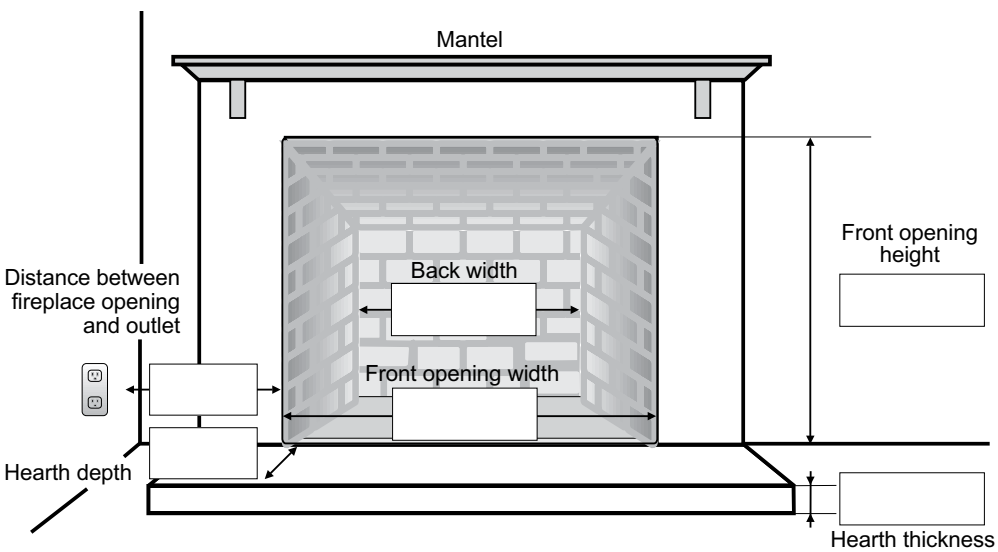

DESIGN INSPIRATION



Ci1150 Alterra wood insert with contemporary faceplate.



Ci2700 shown with low profile faceplate (digital catalytic monitor not shown).



Alterra Pro i3000A medium wood insert shown with classic faceplate.



Find More Products at **REGENCY-FIRE.COM**

Your Regency Dealer

©2026 FPI Fireplace Products International Ltd. Regency®, Regency Classic™, Regency Cascades™, Regency Pro-Series™, Hampton™ , Alterra Pro™ and Alterra® are registered or proprietary trademarks of FPI Fireplace Products International Ltd. All rights reserved.
Printed in Canada (07/26)
Part no. 944-439